The feature set is redundant, and one column is inert
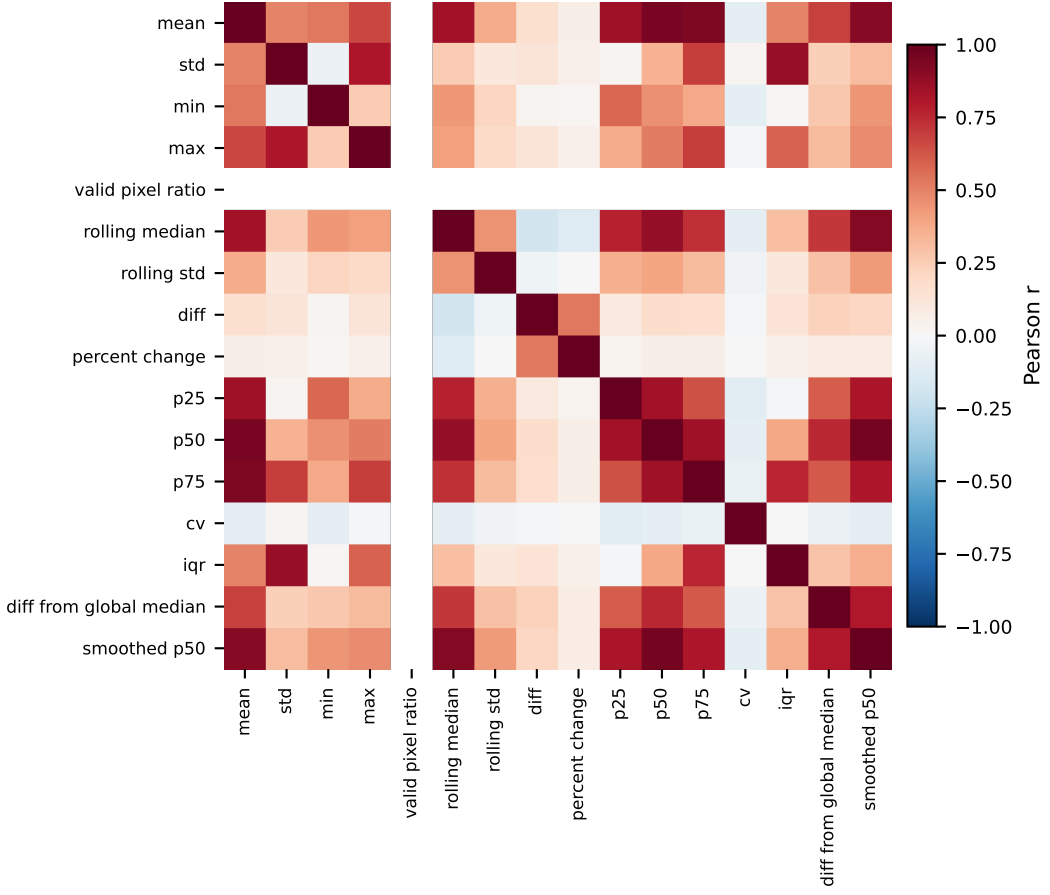
Median |r| is 0.30 over the informative pairs and 5 exceed 0.9. The blank row and column is valid pixel ratio: it is constant across every observation, so the detector sees 15 features rather than 16.