

Spring REST using Spring Boot 3 Assignment

Hello World RESTful Web Service

Objective

Write a REST service in the spring learn application created earlier, that returns the text "Hello World!!" using Spring Web Framework.

applications.properties

spring.application.name=orm-learn

Spring Framework and application log

logging.level.org.springframework=info

logging.level.com.cognizant=debug

Hibernate logs for displaying executed SQL, input and output

logging.level.org.hibernate.SQL=trace

logging.level.org.hibernate.type.descriptor.sql=trace

Log pattern

logging.pattern.console=%d{dd-MM-yy} %d{HH:mm:ss.SSS} %-20.20thread %5p %-25.25logger{25} %25M %4L %m%n

Database configuration

spring.datasource.driver-class-name=com.mysql.cj.jdbc.Driver

spring.datasource.url=jdbc:mysql://localhost:3306/ormlearn

spring.datasource.username=root

spring.datasource.password=dummyspassword

Hibernate configuration

spring.jpa.hibernate.ddl-auto=validate

spring.jpa.properties.hibernate.dialect=org.hibernate.dialect.MySQLDialect

server.port=8083


HelloController.java

```
1 package com.cognizant.orm_learn.controller;
2
3 import org.slf4j.Logger;
4 import org.slf4j.LoggerFactory;
5 import org.springframework.web.bind.annotation.GetMapping;
6 import org.springframework.web.bind.annotation.RestController;
7
8 @RestController
9 public class HelloController {
10
11     private static final Logger LOGGER=LoggerFactory.getLogger(HelloController.class);
12
13     @GetMapping("/hello")
14     public String sayHello() {
15         LOGGER.info("start");
16         String msg="Hello World!!";
17         LOGGER.info("end");
18         return msg;
19     }
20 }
21
```

Console:

```
wn
wn
INFO org.hibernate.orm.core      initiateService 53 HH000489: No JTA platform available (set 'hibernate.transaction.jta.platformName' to a platform name)
INFO rEntityManagerFactoryBean buildNativeEntityManagerFactory 464 Initialized JPA EntityManagerFactory for persistence unit 'default'
INFO .q.QueryEnhancerFactories   <clinit> 48 Hibernate is in classpath; If applicable, HQL parser will be used.
WARN ation$JpaWebConfiguration openEntityManagerInViewInterceptor 261 spring.jpa.open-in-view is enabled by default. Therefore, database operations may require explicit flushing.
INFO o.s.b.t.TomcatWebServer      start 240 Tomcat started on port 8083 (http) with context path '/'
INFO c.c.o.OrmLearnApplication    logStarted 60 Started OrmLearnApplication in 8.372 seconds (process running for 9.235)
INFO o.a.c.c.C.[.][/]            log 168 Initializing Spring DispatcherServlet 'dispatcherServlet'
INFO o.s.w.s.DispatcherServlet    initServletBean 523 Initializing Servlet 'dispatcherServlet'
INFO o.s.w.s.DispatcherServlet    initServletBean 545 Completed initialization in 8 ms
INFO c.c.o.c.HelloController      sayHello 15 start
INFO c.c.o.c.HelloController      sayHello 17 end
```

API Tester:

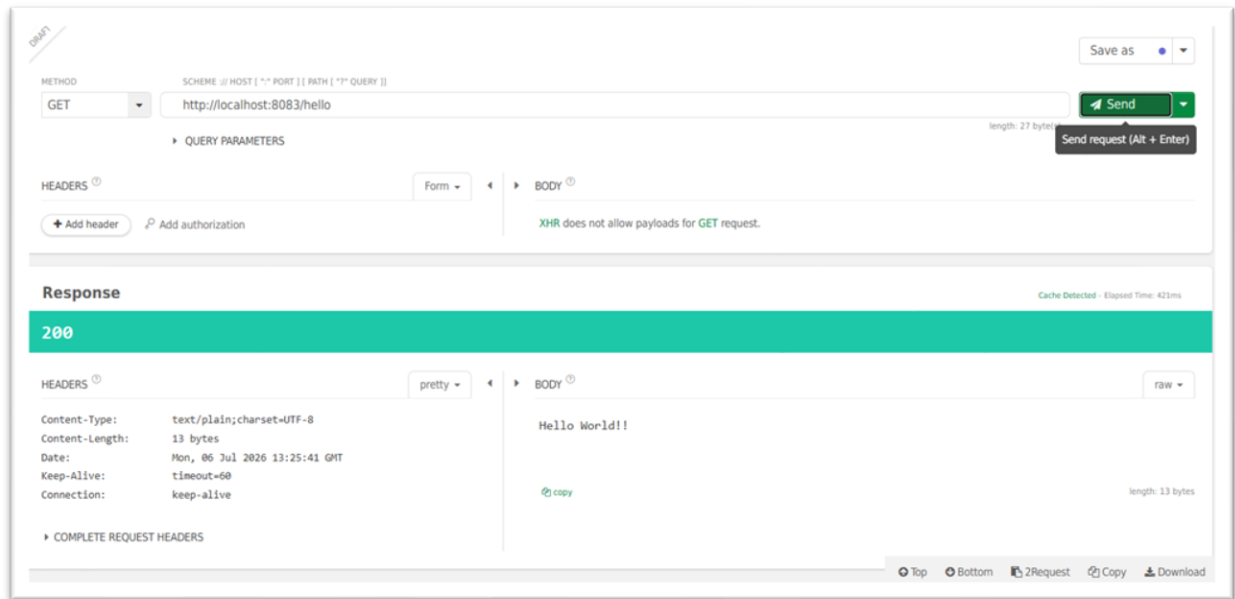

Testing in Chrome Browser:

