

REACTJS (ASSIGNMENT 11)

Aim

To create a React application named eventexamplesapp that demonstrates event handling, synthetic events, multiple event handlers, passing arguments to event handlers, and a Currency Converter component using React.

1. Create a new React application named eventexamplesapp.

npx create-react-app eventexamplesapp

```
PS C:\Users\eshit\OneDrive\Desktop> npx create-react-app eventexamplesapp
npm audit fix

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.

Created git commit.

Success! Created eventexamplesapp at C:\Users\eshit\OneDrive\Desktop\eventexamplesapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.

  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

  cd eventexamplesapp
  npm start

Happy hacking!
PS C:\Users\eshit\OneDrive\Desktop> cd eventexamplesapp
```

2. Navigate to the project folder.

cd eventexamplesapp

3. App.js

```
import './App.css';
```

```
import { useState } from 'react';
```

```
import CurrencyConvertor from './Components/CurrencyConvertor';
```

```
function App() {
```

```
  const [count, setCount] = useState(0);
```

```
const increment = () => {  
  setCount(count + 1);  
};
```

```
const decrement = () => {  
  setCount(count - 1);  
};
```

```
const sayHello = () => {  
  alert("Hello! Have a nice day.");  
};
```

```
const handleIncrement = () => {  
  increment();  
  sayHello();  
};
```

```
const sayWelcome = (message) => {  
  alert(message);  
};
```

```
const onPress = () => {  
  alert("I was clicked");  
};
```

```
return (  
  <div className="App">
```

<h1>React Event Examples</h1>

<h2>Counter : {count}</h2>

<button onClick={handleIncrement}>

Increment

</button>

<button onClick={decrement}>

Decrement

</button>

<button onClick={() => sayWelcome("Welcome")}>

Say Welcome

</button>

<button onClick={onPress}>

OnPress

</button>

<hr />

<CurrencyConvertor />

```
    </div>

  );
}
```

```
export default App;
```

4. Components/CurrencyConvertor.js

```
import React, { useState } from "react";
```

```
function CurrencyConvertor() {
```

```
  const [rupees, setRupees] = useState("");
```

```
  const [euro, setEuro] = useState("");
```

```
  const handleSubmit = () => {
```

```
    const result = (rupees / 90).toFixed(2);
```

```
    setEuro(result);
```

```
  };
```

```
  return (
```

```
    <div>
```

```
      <h2>Currency Convertor</h2>
```

```

    <input
      type="number"
      placeholder="Enter Rupees"
      value={rupees}
      onChange={(e) => setRupees(e.target.value)}
    />

    <br /><br />

    <button onClick={handleSubmit}>
      Convert
    </button>

    <br /><br />

    <h3>Euro : €{euro}</h3>

  </div>

);
}

```

```
export default CurrencyConvertor;
```

5. Result

The React application was developed successfully. Different types of event handling were implemented, including multiple function calls, passing arguments to event handlers, synthetic events, and a Currency Converter component that converts Indian Rupees into Euros when the Convert button is clicked.

6. Output

```
PS C:\Users\eshit\OneDrive\Desktop\eventexamplesapp> npm start
```

You can now view **eventexamplesapp** in the browser.

Local: http://localhost:3000

On Your Network: http://192.168.56.1:3000

Note that the development build is not optimized.
To create a production build, use `npm run build`.

webpack compiled **successfully**




React Event Examples

Counter : 2

Currency Convertor

Euro : €1.11

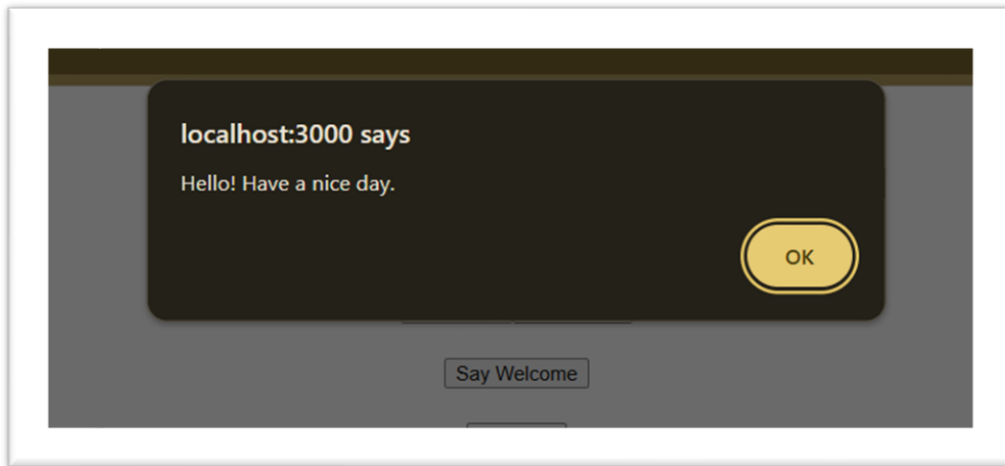

7. Conclusion

The experiment was completed successfully. A React application named **eventexamplesapp** was created to demonstrate various **event handling techniques**, including invoking multiple methods, passing arguments to event handlers, handling synthetic events, and implementing a **Currency Converter** using React state and event handling. This experiment helped in understanding how user interactions are handled efficiently in React applications.