

REACTJS (ASSIGNMENT 12)


AIM:

To develop a React application that demonstrates conditional rendering by displaying different pages for Guest and User. The application also displays flight details using reusable React components.

Components Created

- App.js
- GuestPage.js
- UserPage.js
- FlightDetails.js

FILE STRUCTURE:

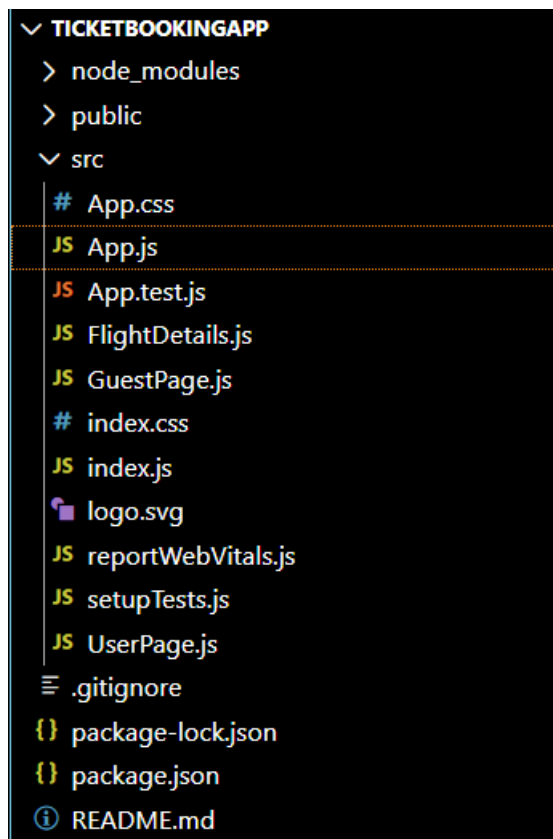

App.js:

```
import React from "react";
import GuestPage from "./GuestPage";
import UserPage from "./UserPage";
function App() {
  const isLoggedIn = false;
  return (
    <div style={{ textAlign: "center", marginTop: "30px" }}>
      <h1>Ticket Booking Application</h1>
      {
        isLoggedIn ? <UserPage /> : <GuestPage />
      }
    </div>
  );
}
```

```
    </div>
  );
}
export default App;
```

FlightDetails.js:

```
import React from "react";
function FlightDetails() {
  const flights = [
    {
      id: 1,
      flightName: "IndiGo",
      source: "Kolkata",
      destination: "Delhi",
      fare: 5500
    },
    {
      id: 2,
      flightName: "Air India",
      source: "Mumbai",
      destination: "Chennai",
      fare: 4800
    },
    {
      id: 3,
      flightName: "SpiceJet",
      source: "Bangalore",
      destination: "Hyderabad",
      fare: 3200
    }
  ];
  return (
    <div>
      <h2>Flight Details</h2>
      <table
        border="1"
        cellPadding="10"
        style={{ margin: "auto", borderCollapse: "collapse" }}>
        >
          <thead>
            <tr>
              <th>Flight Name</th>
              <th>Source</th>
              <th>Destination</th>
              <th>Fare (₹)</th>
            </tr>
          </thead>
```

```

<tbody>
  {flights.map((flight) => (
    <tr key={flight.id}>
      <td>{flight.flightName}</td>
      <td>{flight.source}</td>
      <td>{flight.destination}</td>
      <td>{flight.fare}</td>
    </tr>
  ))}
</tbody>
</table>
</div>
);
}
export default FlightDetails;

```

GuestPage.js:

```

import React from "react";
import FlightDetails from "../FlightDetails";
function GuestPage() {
  return (
    <div>
      <h2>Welcome Guest</h2>
      <p>You can view the flight details.</p>
      <FlightDetails />
    </div>
  );
}
export default GuestPage;

```

OUTPUT:

```

PS C:\Users\Lenovo\ticketbookingapp> npm start

You can now view ticketbookingapp in the browser.


Local:      http://localhost:3000
On Your Network:  http://192.168.0.103:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
PS C:\Users\Lenovo\ticketbookingapp>

```

Guest View



Ticket Booking Application

Login

Welcome Guest

You can view the flight details.

Flight Details

Flight Name	Source	Destination	Fare (₹)
IndiGo	Kolkata	Delhi	5500
Air India	Mumbai	Chennai	4800
SpiceJet	Bangalore	Hyderabad	3200

User View



Ticket Booking Application

Logout

Welcome User

You can book tickets.

Book Ticket

Flight Details

Flight Name	Source	Destination	Fare (₹)
IndiGo	Kolkata	Delhi	5500
Air India	Mumbai	Chennai	4800
SpiceJet	Bangalore	Hyderabad	3200

Conclusion

The Ticket Booking Application was successfully implemented using ReactJS. The application demonstrates conditional rendering by displaying different interfaces for Guest and User while reusing the FlightDetails component.