


REACTJS (ASSIGNMENT 13)

AIM:

To create a React application named Blogger Application that displays Books, Blogs and Courses using multiple React components.

FILE STRUCTURE:

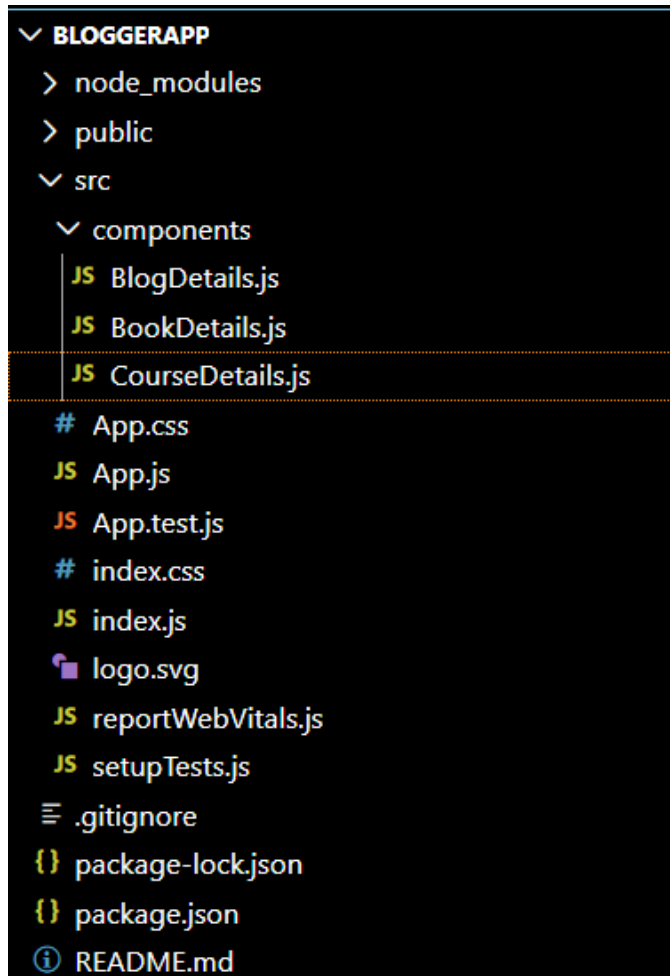

App.js:

```
import './App.css';
import BookDetails from './BookDetails';
import BlogDetails from './BlogDetails';
import CourseDetails from './CourseDetails';
function App() {
  return (
    <div className="container">
      <BookDetails />
      <BlogDetails />
      <CourseDetails />
    </div>
  );
}
export default App;
```

App.css:

```
body{
  margin:0;
  padding:30px;
  font-family:Arial;
  background:#f2f2f2;
}
.container{
  display:flex;
  justify-content:center;
  gap:20px;
  align-items:flex-start;
  flex-wrap:wrap;
}
.container>div{
  background:white;
  width:300px;
  min-height:300px;
  padding:20px;
  border-radius:10px;
  box-shadow:0 0 10px rgba(0,0,0,0.2);
}
h2{
  text-align:center;
  color:#0b5394;
}
h3{
  margin-bottom:5px;
}
p{
  margin-top:0;
  margin-bottom:15px;
}
```

BookDetails.js (Logical &&):

```
import React from "react";
function BookDetails() {
  const showBooks = true;
  const books = [
    {
      id: 1,
      title: "Master React",
      price: 670
    },
    {
      id: 2,
      title: "Deep Dive into Angular 11",
      price: 800
    }
  ]
}
```

```

    },
    {
      id: 3,
      title: "Mongo Essentials",
      price: 450
    }
  ];
  return (
    <div>
      <h2>Book Details</h2>
      {showBooks &&
        books.map(book => (
          <div key={book.id}>
            <h3>{book.title}</h3>
            <p>Price : ₹{book.price}</p>
          </div>
        ))
      }
    </div>
  );
}
export default BookDetails;

```

BlogDetails.js (Ternary Operator):

```

import React from "react";
function BlogDetails() {
  const showBlogs = true;
  const blogs = [
    {
      id: 1,
      title: "React Learning",
      author: "John"
    },
    {
      id: 2,
      title: "Installation Guide",
      author: "Smith"
    }
  ];
  return (
    <div>
      <h2>Blog Details</h2>
      {
        showBlogs ?
        blogs.map(blog => (
          <div key={blog.id}>
            <h3>{blog.title}</h3>
            <p>Author : {blog.author}</p>

```

```

        </div>
    ))
    :
    <p>No Blogs Available</p>
  }
</div>
);
}
export default BlogDetails;

```


CourseDetails.js (if-else):

```

import React from "react";
function CourseDetails() {
  const showCourses = true;
  const courses = [
    {
      id: 1,
      name: "React",
      duration: "2 Months"
    },
    {
      id: 2,
      name: "Angular",
      duration: "3 Months"
    }
  ];
  if(showCourses){
    return(
      <div>
        <h2>Course Details</h2>
        {
          courses.map(course=>(
            <div key={course.id}>
              <h3>{course.name}</h3>
              <p>Duration : {course.duration}</p>
            </div>
          ))
        }
      </div>
    );
  }
  else{
    return(
      <h3>No Courses Available</h3>
    );
  }
}
export default CourseDetails;

```

OUTPUT:

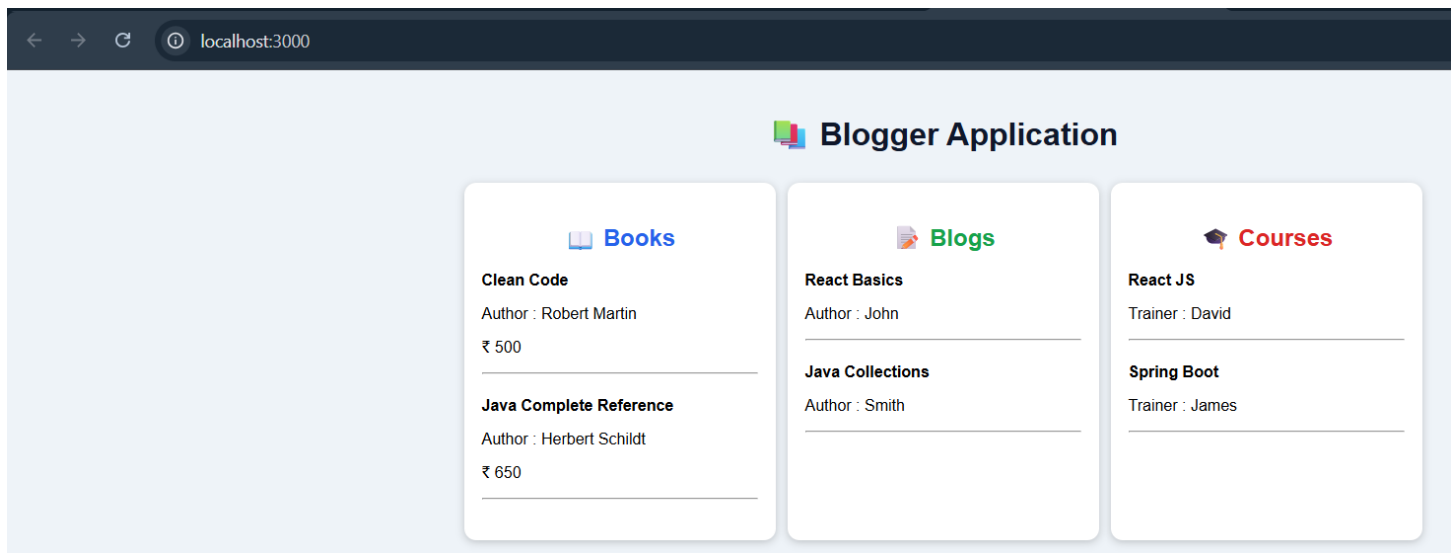

Result

The Blogger Application was successfully developed using React components. The application displays Books, Blogs and Courses in separate reusable components with a responsive card layout. The output was verified successfully.