


Angular Application on GitHub

1.command project line: -

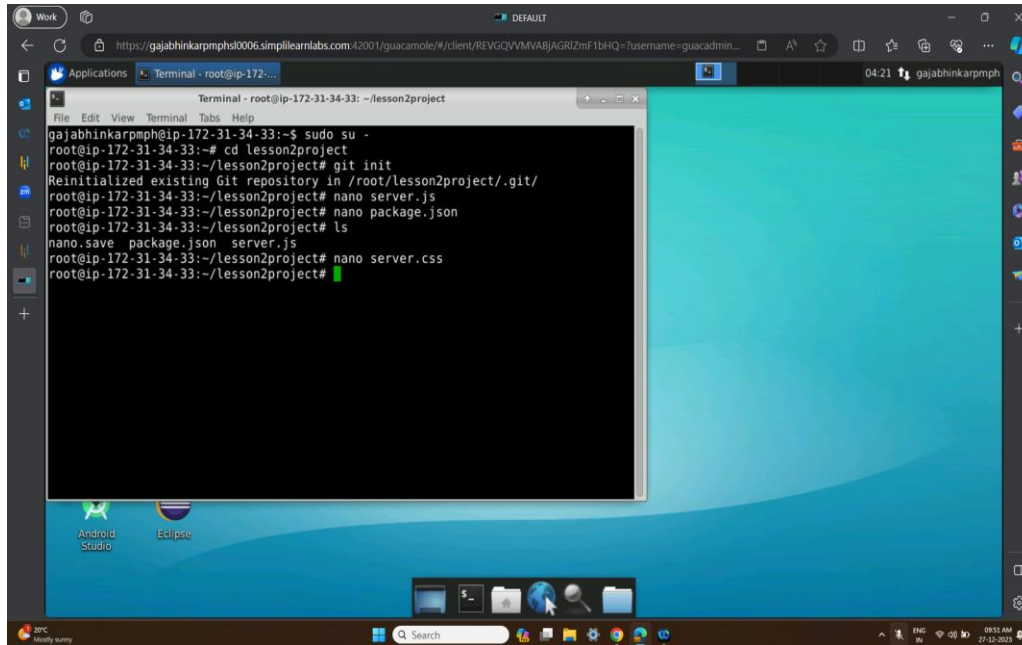


The screenshot shows a terminal window titled "Terminal - root@ip-172-31-34-33: ~/lesson2project" open on a Linux desktop. The desktop background is a blue gradient with icons for "Android Studio" and "Eclipse". The terminal displays the following commands and output:

```
gajabhinkarpmph@ip-172-31-34-33:~$ sudo su -
root@ip-172-31-34-33:~# cd lesson2project
root@ip-172-31-34-33:~/lesson2project# git init
Reinitialized existing Git repository in /root/lesson2project/.git/
root@ip-172-31-34-33:~/lesson2project# nano server.js
root@ip-172-31-34-33:~/lesson2project# nano package.json
root@ip-172-31-34-33:~/lesson2project# ls
nano.save package.json server.js
root@ip-172-31-34-33:~/lesson2project# nano server.css
root@ip-172-31-34-33:~/lesson2project#
```

The terminal window is part of a larger application window titled "Applications" with a sub-tab "Terminal - root@ip-172-31-34-33: ~/lesson2project". The desktop environment includes a taskbar at the bottom with a search bar, application icons, and system status indicators showing the time as 08:55 AM on 27-12-2023.

2.command insert:-


Creating nano server.js, nano package.json and nano server.css files.

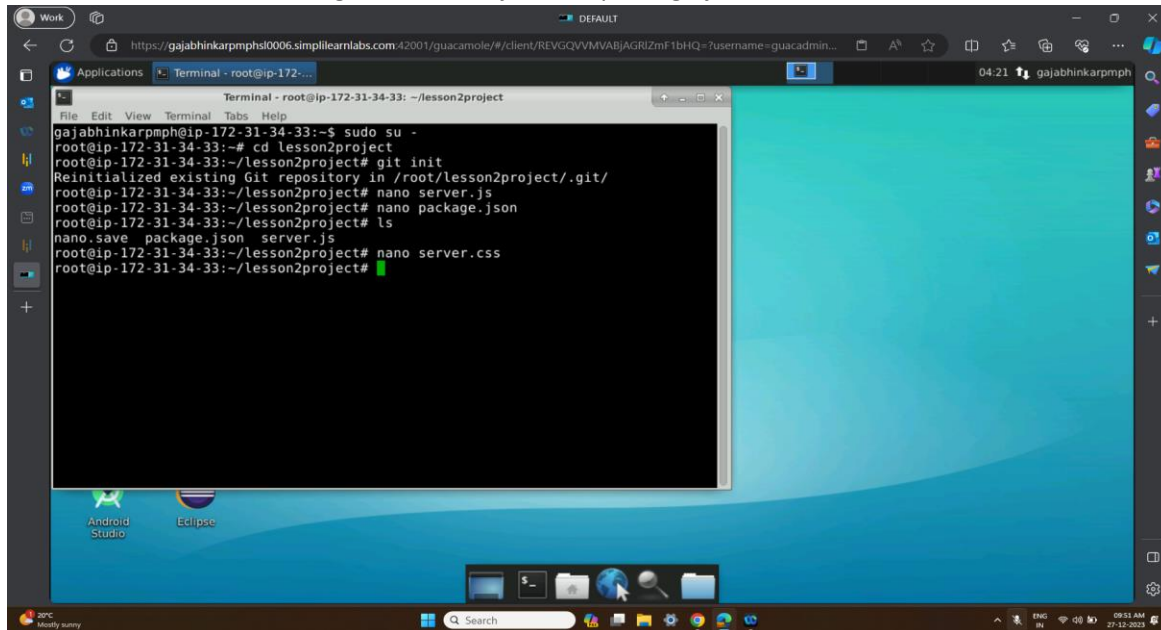

```
gajabhinkarpmph@ip-172-31-34-33:~$ sudo su -
root@ip-172-31-34-33:~# cd lesson2project
root@ip-172-31-34-33:~/lesson2project# git init
Reinitialized existing Git repository in /root/lesson2project/.git/
root@ip-172-31-34-33:~/lesson2project# nano server.js
root@ip-172-31-34-33:~/lesson2project# nano package.json
root@ip-172-31-34-33:~/lesson2project# ls
nano.save package.json server.js
root@ip-172-31-34-33:~/lesson2project# nano server.css
root@ip-172-31-34-33:~/lesson2project#
```

3. Command gitignore:-

Using gitignore command to ignore nano server.css file

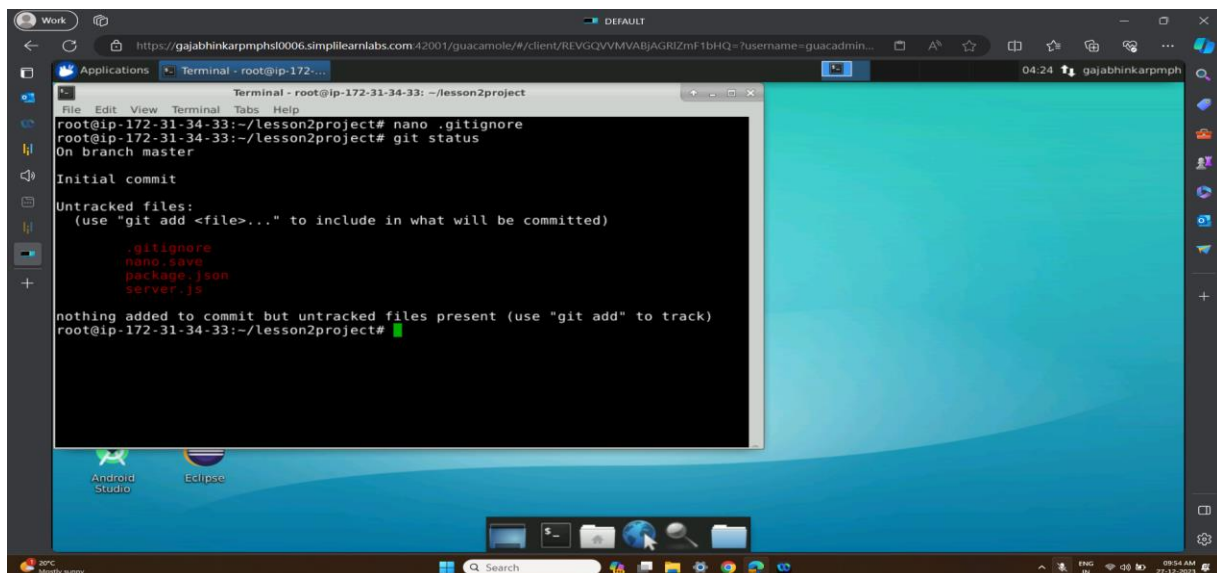

```
root@ip-172-31-34-33:~/lesson2project# nano .gitignore
root@ip-172-31-34-33:~/lesson2project# git status
On branch master


Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be committed)

        .gitignore
        nano.save
        package.json
        server.js

nothing added to commit but untracked files present (use "git add" to track)
root@ip-172-31-34-33:~/lesson2project#
```

4. Git Status: -

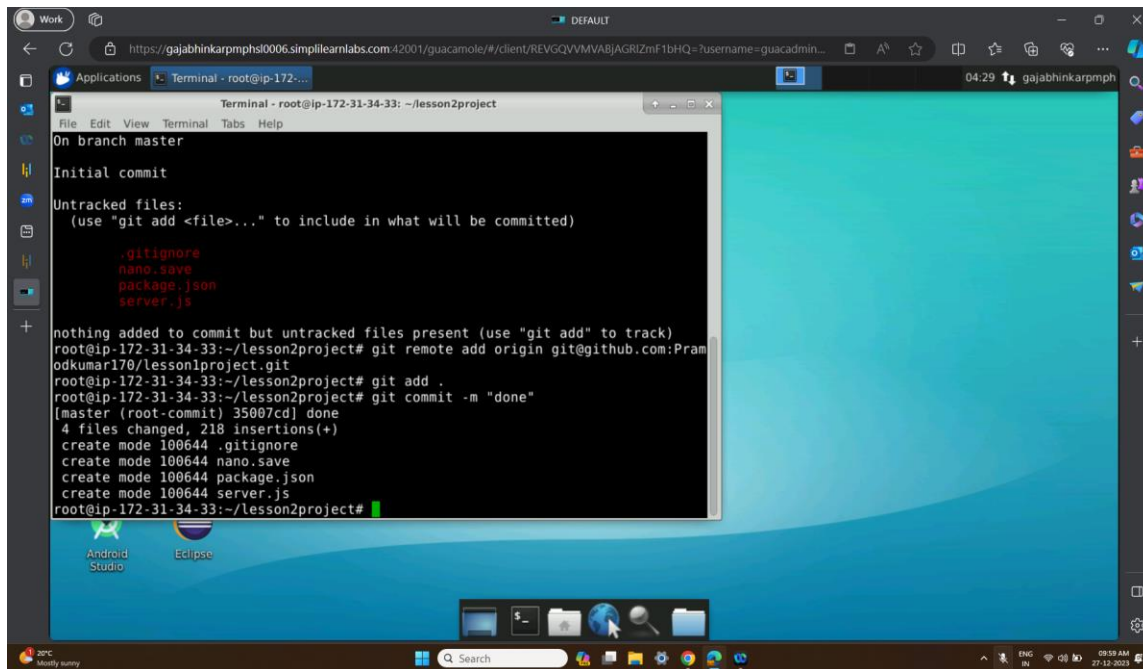


The screenshot shows a terminal window titled "Terminal - root@ip-172-31-34-33: ~/lesson2project". The terminal output is as follows:

```
On branch master
Initial commit
Untracked files:
  (use "git add <file>..." to include in what will be committed)

        .gitignore
        nano.save
        package.json
        server.js

nothing added to commit but untracked files present (use "git add" to track)
root@ip-172-31-34-33:~/lesson2project# git remote add origin git@github.com:Pramodkumar170/lesson1project.git
root@ip-172-31-34-33:~/lesson2project# git add .
root@ip-172-31-34-33:~/lesson2project# git commit -m "done"
[master (root-commit) 35007cd] done
4 files changed, 218 insertions(+)
create mode 100644 .gitignore
create mode 100644 nano.save
create mode 100644 package.json
create mode 100644 server.js
root@ip-172-31-34-33:~/lesson2project#
```

5. Git Add and Commit commands: -

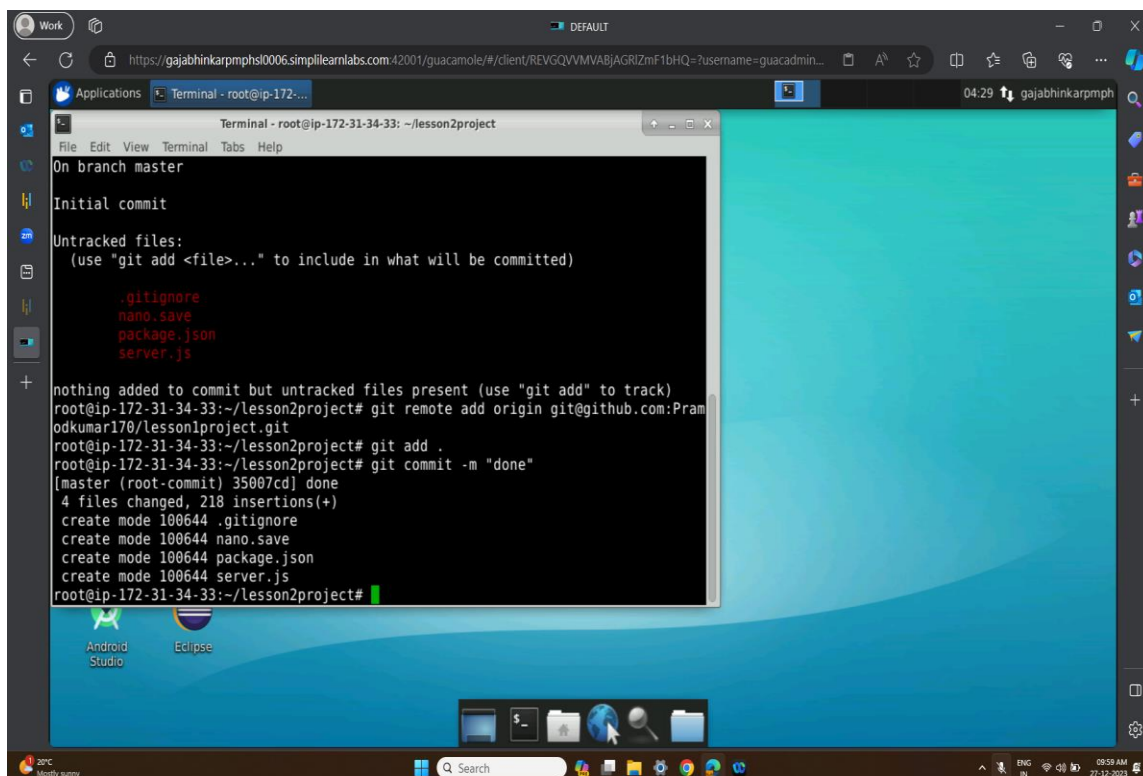

The screenshot shows a terminal window titled "Terminal - root@ip-172-31-34-33: ~/lesson2project". The terminal output is as follows:


```
On branch master
Initial commit
Untracked files:
  (use "git add <file>..." to include in what will be committed)

        .gitignore
        nano.save
        package.json
        server.js

nothing added to commit but untracked files present (use "git add" to track)
root@ip-172-31-34-33:~/lesson2project# git remote add origin git@github.com:Pramodkumar170/lesson1project.git
root@ip-172-31-34-33:~/lesson2project# git add .
root@ip-172-31-34-33:~/lesson2project# git commit -m "done"
[master (root-commit) 35007cd] done
4 files changed, 218 insertions(+)
create mode 100644 .gitignore
create mode 100644 nano.save
create mode 100644 package.json
create mode 100644 server.js
root@ip-172-31-34-33:~/lesson2project#
```

6.Push file Command: -

Using “git push origin master” command to push file repository.

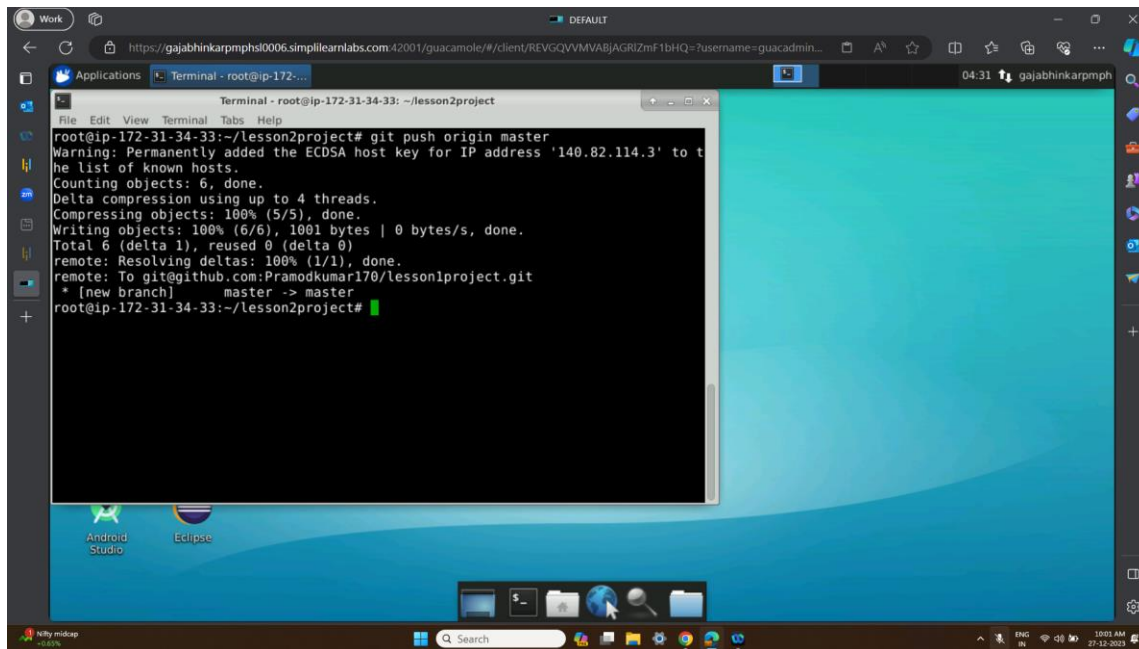

```
root@ip-172-31-34-33: ~/lesson2project
root@ip-172-31-34-33:~/lesson2project# git push origin master
Warning: Permanently added the ECDSA host key for IP address '140.82.114.3' to t
he list of known hosts.
Counting objects: 6, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (5/5), done.
Writing objects: 100% (6/6), 1001 bytes | 0 bytes/s, done.
Total 6 (delta 1), reused 0 (delta 0)
remote: Resolving deltas: 100% (1/1), done.
remote: To git@github.com:Pranodkumar170/lesson1project.git
 * [new branch]      master -> master
root@ip-172-31-34-33:~/lesson2project#
```

7.Created repository: -

