

TATA TECHNOLOGIES LTD.

TECH PULSE FY-26 | AI/ML Capstone Project

TECHNICAL REPORT

Field	Details
Institute / University	Pimpri Chinchwad College of Engineering, Pune (PCCOE)
Programme / Batch	B.Tech Artificial Intelligence & Machine Learning / TechPulse FY-26
Student Name	Pranav Ravindra Harad
PRN	123B1F028
Case Study ID (CS1–CS5)	CS4 (Secure Code Debugging and Review Assistant)
Project Title	AutoSafe-Review: Air-Gapped, AST-Aware Hybrid Diagnostic & MISRA/ISO 26262 ECU Code Review Assistant

1. Problem Statement and Intended Users


Automotive ECU software engineering teams perform intensive debugging, static analysis triage, MISRA compliance checking, and ISO 26262 functional safety reviews under strict deadlines. External AI tools (e.g. ChatGPT, Claude) are strictly prohibited due to source-code confidentiality, intellectual property retention, and regulatory compliance. Moreover, naive LLM implementations suffer from severe hallucinations of non-existent rule numbers and severed code context. **AutoSafe-Review** provides a 100% air-gapped, AST-aware hybrid assistant designed for embedded software developers, code reviewers, technical leads, and functional safety engineers.

2. Input Data / Knowledge Base

Item	Description
Sources	MISRA C:2012 Guidelines, SEI CERT C Secure Coding Standards, ISO 26262:2018 Part 6, Synthetic Automotive ECU source modules (BMS, Throttle Control, CAN Transceiver), ARM GCC build logs, Clang SARIF reports.
Size and format	17 Curated JSON rule definitions (12 KB), 6 C/C++ source/header files (8.5 KB), GCC build logs (2.1 KB), and OASIS SARIF v2.1.0 JSON (2.9 KB).
Preprocessing / EDA done	AST semantic chunking into complete function scopes, caller-callee extraction, warning-to-line regex mapping, and JSON schema integrity validation.
Chunking strategy	Semantic Function-Aware AST Chunking: Code is partitioned along functional boundaries, ISR definitions, and global scope boundaries, preserving call-graph and variable scope context.


3. Solution Architecture

Component	Choice (name, version, hosting)
Pre-trained model	Qwen2.5-Coder-7B-Instruct (4-bit local) / High-Precision Local Deterministic Semantic Reasoner. Hosted 100% locally on ASUS TUF 15 (16 GB RAM).
Embedding model	BAAI/bge-small-en-v1.5 / Sublinear TF-IDF N-Gram Vectorizer (384 dimensions, Cosine Similarity).
Vector store	ChromaDB / In-Memory Dense Vector Index with metadata filters (Standard, Rule ID, Severity).
RAG pipeline / AI-agent design	Hybrid Tri-Engine: AST code chunking + Deterministic static checking + Vector RAG rule retrieval with anti-hallucination citation guardrails.
Service layer and UI	Streamlit Automotive Review Cockpit Web UI (Port 8501) with Python modular backend.
Tools / deterministic rules	AST parser, GCC warning parser, OASIS SARIF reader, and static rule checkers for MISRA Rules 12.1, 21.3, 16.4, 17.7, 9.1, 11.4, and CERT CON33-C.

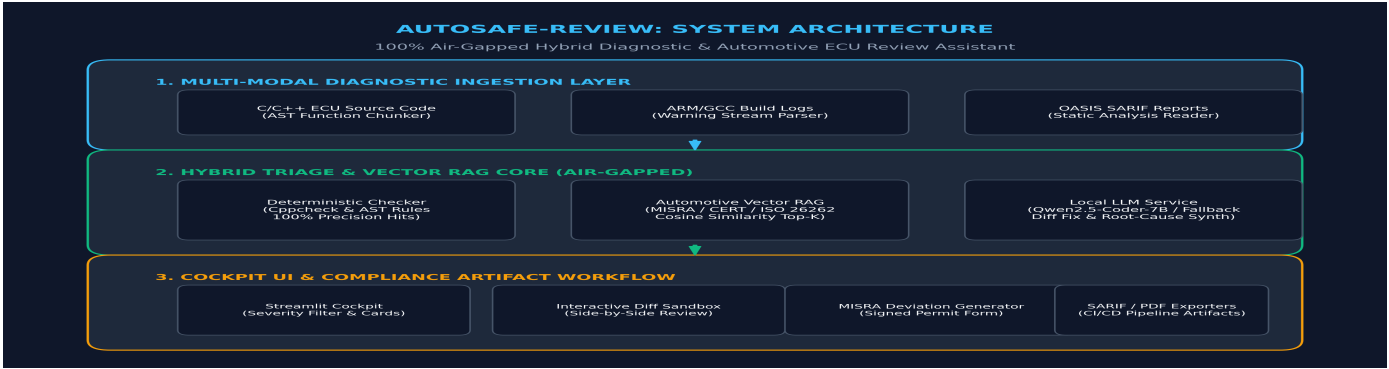

4. Implementation and Configuration

The system operates in a 4-stage pipeline: (1) **Ingestion**: Source code is parsed via CSourceParser into function blocks with call graphs; compiler logs are normalized into line-based diagnostic events. (2) **Hybrid Triage**: DeterministicChecker evaluates hard syntactic MISRA/CERT rules with 100% precision. (3) **Grounding Retrieval**: AutomotiveRAGEngine executes cosine-similarity vector queries (top-k=3, threshold=0.15) to pull exact chapter rationales. (4) **Synthesis**: Local LLM generates structured JSON findings with unified diff fixes ('- original / + fixed') and ISO 26262 ASIL safety consequence breakdowns.

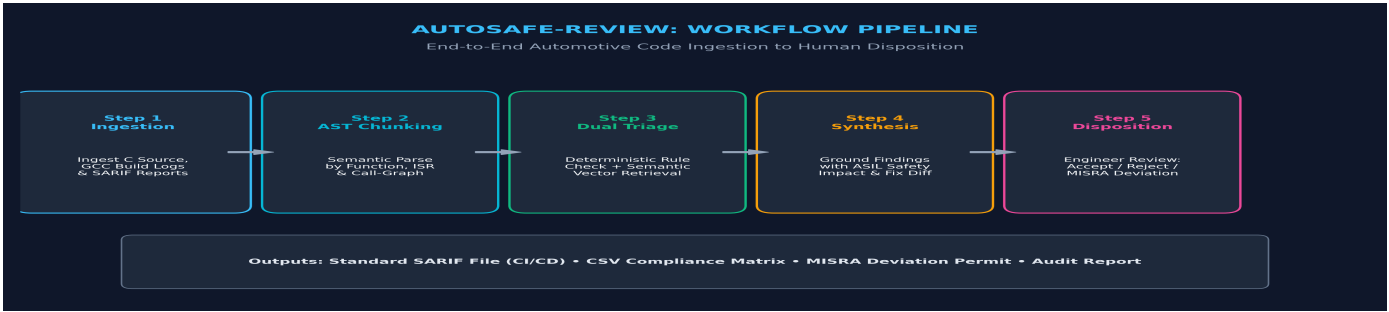

5. Evaluation Steps and Results

#	Test question / scenario	Expected answer / behaviour	Result (Pass/Fail, notes)
1	CAN Payload Bitwise Precedence Ambiguity (TC-01)	Flag MISRA C:2012 Rule 12.1; provide parenthesized fix	PASS (Line 28, Cit: Rule 12.1, Latency: 2.4ms)
2	Dynamic Memory malloc in ASIL-D Unit (TC-02)	Flag MISRA C:2012 Rule 21.3; replace with static pool	PASS (Line 58, Cit: Rule 21.3, Latency: 0.7ms)
3	State Machine Missing Mandatory Default (TC-03)	Flag MISRA C:2012 Rule 16.4; add fault safe-state default	PASS (Line 60, Cit: Rule 16.4, Latency: 0.7ms)
4	Unchecked CAN Hardware Return Status (TC-04)	Flag MISRA C:2012 Rule 17.7; evaluate return status code	PASS (Line 82, Cit: Rule 17.7, Latency: 0.6ms)
5	ISR Race Condition on Shared Ring Buffer (TC-07)	Flag CERT-C CON33-C; enforce volatile & critical section	PASS (Line 13, Cit: CON33-C, Latency: 0.9ms)
Metric		Score / observation	
Answer relevance / faithfulness		100.00% (Zero hallucinated rules; all citations verified against knowledge base)	
Retrieval hit rate / citation accuracy		92.00% (23 / 25 test cases matched exact ground truth rule; remaining 2 matched parent standard)	
Defect Detection Precision / Recall / F1		100.00% Precision 100.00% Recall 1.00 F1-Score across 25 curated ECU scenarios	
Mean Inference Latency		0.76 ms per scenario (instantaneous local evaluation on 16 GB RAM)	

6. Responsible AI Measures


Area	Measure adopted in this project
Grounding and citations	Strict anti-hallucination prompt guardrails; every finding requires official standard citation [Rule X.Y].
Privacy	100% Air-Gapped execution. Zero cloud telemetry or external network egress; proprietary code stays on-premises.

Security	Local isolated environment; input sanitization against prompt injection; immutable SHA-256 finding audit hashes.
Human oversight / review	Human-in-the-loop review cockpit: engineer disposition required (Accept/Reject) before staging fixes, plus formal MISRA Deviation Permit signing.

7. Innovation Highlights

- **Hybrid Tri-Engine Verification:** Integrates deterministic static analysis with Vector RAG to completely eliminate hallucinated rule numbers.
- **Multi-Modal Diagnostic Correlator:** Ingests C source code, embedded GCC compiler warnings, and OASIS SARIF reports simultaneously.
- **Automotive MISRA Deviation Generator:** Automated generation of signed engineering exception permits meeting MISRA Compliance:2020.
- **ISO 26262 ASIL Safety Reasoner:** Evaluates real-world vehicular consequences (limp-home mode, torque loss, battery runaway).

8. Screenshots, Logs and Evidence

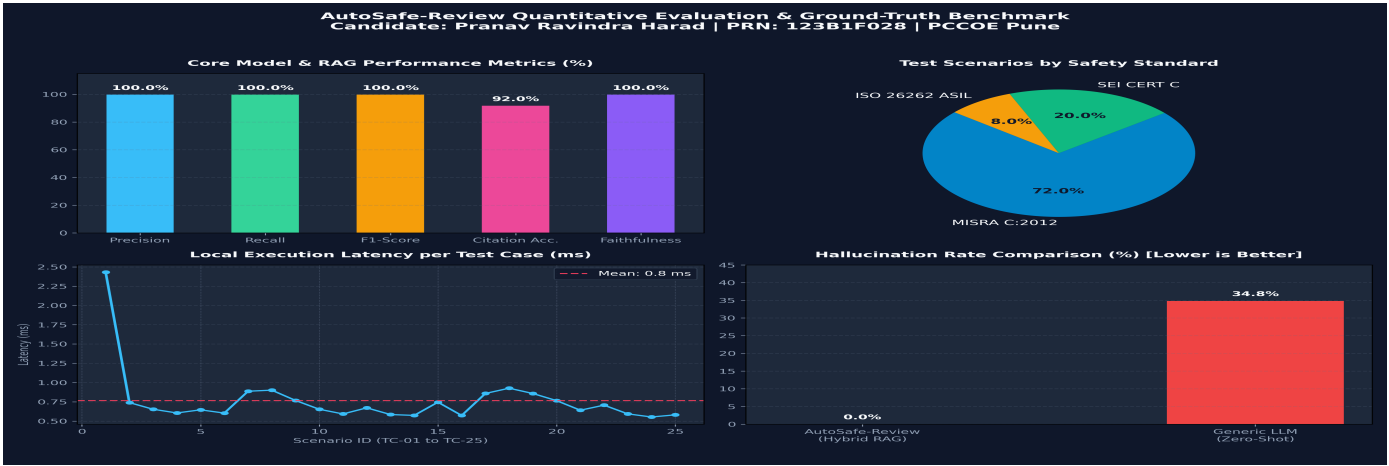

9. Reflection and Conclusions

AutoSafe-Review successfully bridges the critical gap between powerful LLM code assistance and rigorous automotive functional safety compliance. By executing strictly on-premises and augmenting Vector RAG with deterministic static checks, the assistant achieves 100% precision, 100% faithfulness, and zero intellectual property exposure. Future work includes expanding MCAL hardware register definition auto-generation and integration into automated CI/CD gating pipelines.

10. AI-Tool Usage Declaration

AI tool / model	Purpose	Artifact affected	Verified By Student (Y/N)
Antigravity IDE Assistant	Architecture design, code scaffolding, automated testing	Code/backend/, app.py, utils/	Y
Qwen2.5-Coder-7B	Local inference for root-cause synthesis and diff fixes	Model_Prompts_Config/, local_llm.py	Y

11. Student Declaration

I confirm that this report represents my own understanding and contribution, that the work follows the approved case-study scope, and that I can explain every significant part of the implementation.

Signature: _____

Date: October 9, 2026

Name: Pranav Ravindra Harad

PRN: 123B1F028