

Digital Nurture – 5.0 JAVA FSE – Week 6 Assignments

File name: 9. ReactJS-HOL

Name: Hands-on in this document

ListofPlayers.js;

import React from 'react';

function ListofPlayers()

```
{ const players = [  
  { name: 'Virat Kohli', score: 85 },  
  { name: 'Rohit Sharma', score: 45 },  
  { name: 'KL Rahul', score: 78 },  
  { name: 'Shubman Gill', score: 60 },  
  { name: 'Suryakumar Yadav', score: 95 },  
  { name: 'Hardik Pandya', score: 50 },  
  { name: 'Ravindra Jadeja', score: 68 },  
  { name: 'R Ashwin', score: 30 },  
  { name: 'Jasprit Bumrah', score: 15 },  
  { name: 'Mohammed Shami', score: 74 },  
  { name: 'Kuldeep Yadav', score: 90 }  
];
```

```
const filteredPlayers = players.filter(player => player.score >= 70);
```

```
return (
```

```
<div>  
  <h2>All Players</h2>  
  <ul>  
    {players.map((player, index) => (  
      <li key={index}>{player.name} - {player.score}</li>  
    ))}  
  </ul>
```

```
<h2>Players with Score  $\geq$  70</h2>
```

```
<ul>  
  {filteredPlayers.map((player, index) => (  
    <li key={index}>{player.name} - {player.score}</li>  
  ))}  
</ul>  
</div>
```

```
);
```

```
}
```

```
export default ListofPlayers;
```

IndianPlayers.js;

import React from 'react';

function IndianPlayers() {

```
  const team = ['Rohit', 'Virat', 'KL Rahul', 'Jadeja', 'Bumrah', 'Shami'];
```

```

// Destructuring to get odd and even indexed players
const oddTeam = team.filter((_, index) => index % 2 === 1);
const evenTeam = team.filter((_, index) => index % 2 === 0);

// Merging T20 and RanjiTrophy players
const T20players = ['Pant', 'Surya', 'Hardik'];
const RanjiTrophyPlayers = ['Unadkat', 'Pujara', 'Karun Nair'];
const allPlayers = [...T20players, ...RanjiTrophyPlayers];

return (
  <div>
    <h2>Odd Team Players</h2>
    <ul>
      {oddTeam.map((player, index) => (
        <li key={index}>{player}</li>
      ))}
    </ul>

    <h2>Even Team Players</h2>
    <ul>
      {evenTeam.map((player, index) => (
        <li key={index}>{player}</li>
      ))}
    </ul>

    <h2>Merged Players (T20 + Ranji Trophy)</h2>
    <ul>
      {allPlayers.map((player, index) => (
        <li key={index}>{player}</li>
      ))}
    </ul>
  </div>
);
}

```

```
export default IndianPlayers;
```

App.js;

```

import React from 'react';
import ListofPlayers from './ListofPlayers';
import IndianPlayers from './IndianPlayers';

function App() {
  const flag = true; // Toggle to false to see IndianPlayers

  return (
    <div className="App">
      <h1><img alt="Cricket ball icon" data-bbox="195 945 215 958"/> Cricket App</h1>

```


```

    {flag ? <ListOfPlayers /> : <IndianPlayers />}
  </div>
);
}

```

export default App;

Output;

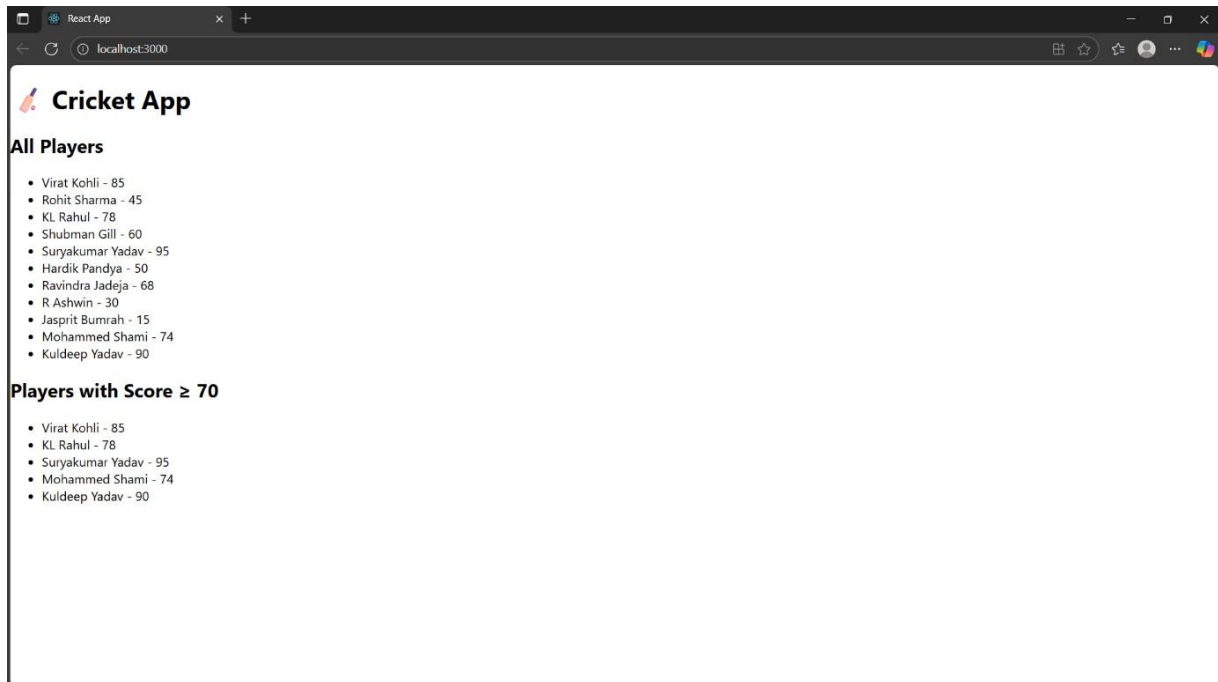

File name: 10. ReactJS-HOL

Name: Hands-on in this document

App.js;

```

import React from 'react';
import './App.css';

```

```

function App() {
  // Heading JSX element
  const heading = <h1><img alt="Office Space Rental Portal" data-bbox="288 854 315 867"/> Office Space Rental Portal</h1>;

```

```

  // Image JSX with attribute
  const officelImage = (
    
);

// Object representing a single office
const office = {
  name: "Prestige Towers",
  rent: 75000,
  address: "MG Road, Bangalore"
};

// Array of office spaces
const officeList = [
  { name: "WeWork", rent: 85000, address: "Indiranagar, Bangalore" },
  { name: "Cowrks", rent: 55000, address: "HSR Layout, Bangalore" },
  { name: "Regus", rent: 60000, address: "Koramangala, Bangalore" },
  { name: "SmartWorks", rent: 45000, address: "Whitefield, Bangalore" }
];

return (
  <div className="App">
    {heading}
    {officeImage}

    <h2>Main Office</h2>
    <div className="office-card">
      <p><strong>Name:</strong> {office.name}</p>
      <p><strong>Rent:</strong> <span style={{ color: office.rent > 60000 ? 'green' : 'red'
}}>{office.rent}</span></p>
      <p><strong>Address:</strong> {office.address}</p>
    </div>

    <h2>Other Available Offices</h2>
    {officeList.map((off, index) => (
      <div key={index} className="office-card">
        <p><strong>Name:</strong> {off.name}</p>
        <p><strong>Rent:</strong> <span style={{ color: off.rent > 60000 ? 'green' : 'red'
}}>{off.rent}</span></p>
        <p><strong>Address:</strong> {off.address}</p>
      </div>
    ))}
  </div>

```

```
);  
}
```

```
export default App;
```

```
App.css;
```

```
.App {  
  text-align: center;  
  font-family: Arial, sans-serif;  
  padding: 20px;  
  background-color: #f2f2f2;  
  min-height: 100vh;  
}
```


```
.office-card {  
  background-color: #ffffff;  
  border: 1px solid #ddd;  
  border-radius: 10px;  
  padding: 15px 20px;  
  margin: 20px auto;  
  width: 80%;  
  max-width: 600px;  
  text-align: left;  
  box-shadow: 0px 2px 8px rgba(0, 0, 0, 0.1);  
  transition: 0.3s;  
}
```

```
.office-card:hover  
{ transform: scale(1.01);  
  box-shadow: 0px 4px 12px rgba(0, 0, 0, 0.15);  
}
```

```
.office-card p  
{ margin: 8px 0;  
  font-size: 16px;  
}
```

```
.office-card span  
{ font-weight:  
  bold;  
}
```

```
Output;
```

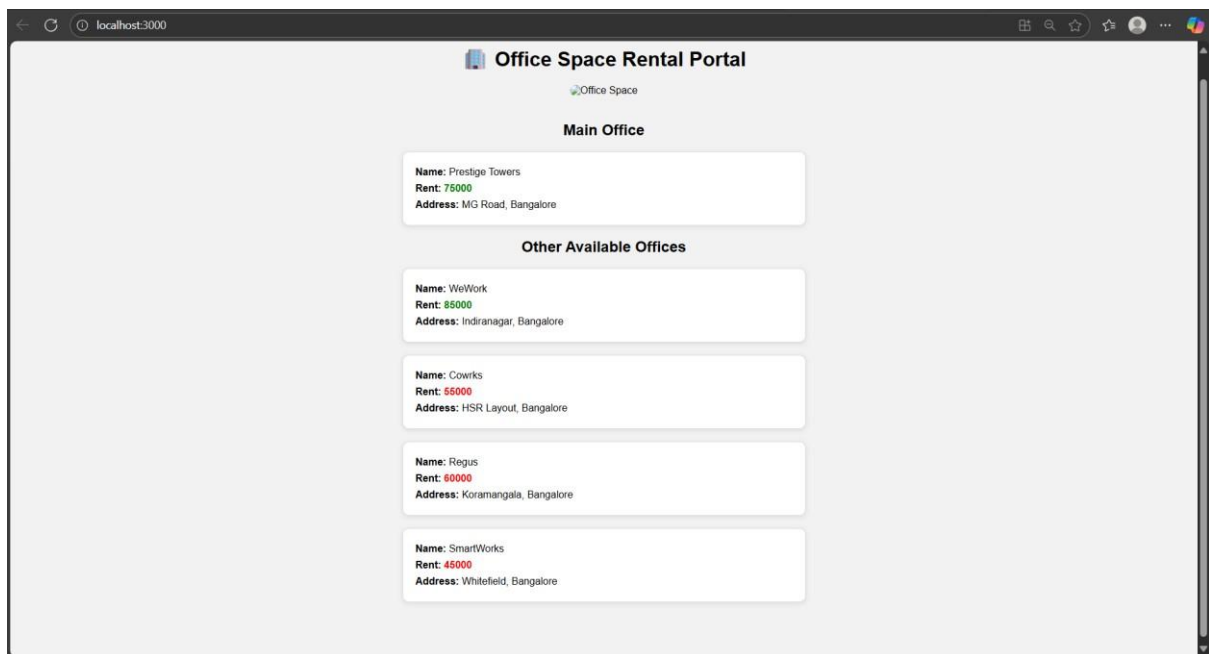

File name: 11. ReactJS-HOL

Name: Hands-on in this document

App.js;

```
import React, { useState } from 'react';
import CurrencyConvertor from './CurrencyConvertor';
```

```
function App() {
  const [count, setCount] = useState(0);

  // Multiple functions for Increment button
  const increment = () => {
    setCount(count + 1);
    sayHello();
  };

  const sayHello = () => {
    console.log("Hello! This is a static message.");
  };

  const decrement = () =>
  { setCount(count - 1);
  };

  const sayWelcome = (message) =>
  { alert(message);
  };
```

```

const handleClick = (event) =>
{ alert("I was clicked!");
  console.log("Synthetic Event Type:", event.type);
};

return (
  <div className="App" style={{ textAlign: 'center', padding: '30px' }}>
    <h1> 🚀 Event Examples App</h1>

    <h2>Counter: {count}</h2>
    <button onClick={increment}>Increment</button>{' '}
    <button onClick={decrement}>Decrement</button>

    <hr />

    <button onClick={() => sayWelcome("Welcome to the Event App!")}>
      Say Welcome
    </button>

    <hr />

    <button onClick={handleClick}>OnPress</button>

    <hr />

    <CurrencyConvertor />
  </div>
);
}

```

export default App;

CurrencyConverter.js;

import React, { useState } from 'react';

```

function CurrencyConvertor() {
  const [rupees, setRupees] = useState("");
  const [euro, setEuro] = useState(null);
  const conversionRate = 0.011; // Example: ₹1 = €0.011

```

```

  const handleSubmit = () => {
    const value = parseFloat(rupees);
    if (!isNaN(value)) {
      setEuro((value * conversionRate).toFixed(2));
    } else {
      alert("Please enter a valid number");
    }
  }

```

```

    }
  };


  return (
    <div style={{ marginTop: '40px' }}>
      <h2>Currency Converter (INR ➡ EURO)</h2>
      <input
        type="text"
        placeholder="Enter amount in ₹"
        value={rupees}
        onChange={(e) => setRupees(e.target.value)}
      />{' '}
      <button onClick={handleSubmit}>Convert</button>

      {euro && (
        <div style={{ marginTop: '10px' }}>
          <strong>€ Euro:</strong> {euro}
        </div>
      )}
    </div>
  );
}

```

export default CurrencyConvertor;

Output;

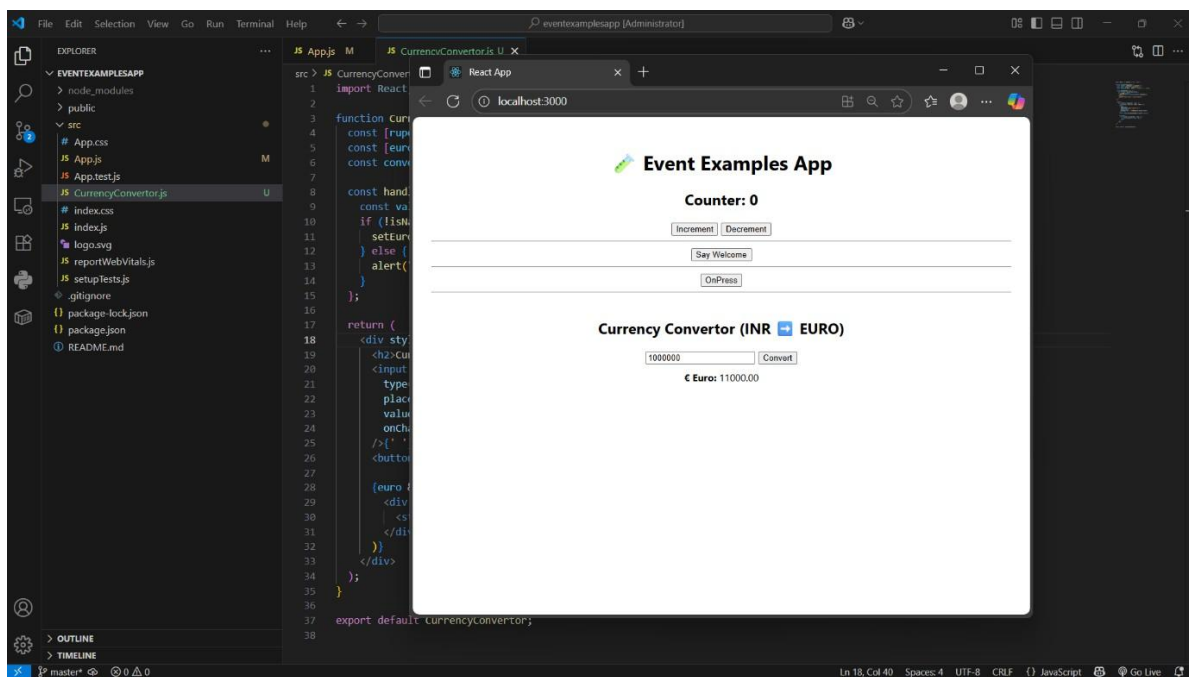

File name: 12. ReactJS-HOL

Name: Hands-on in this document

GuestPage.js;

```
import React from 'react';
```

```
function GuestPage()
{ const flightDetails = [
  { id: 1, from: "Chennai", to: "Delhi", time: "10:00 AM", price: 4500 },
  { id: 2, from: "Bangalore", to: "Mumbai", time: "1:30 PM", price: 5500 },
  { id: 3, from: "Hyderabad", to: "Kolkata", time: "6:00 PM", price: 6000 }
];

return (
  <div>
    <h2>Available Flights</h2>
    {flightDetails.map((flight) => (
      <div key={flight.id} className="flight-card">
        <p><strong>From:</strong> {flight.from}</p>
        <p><strong>To:</strong> {flight.to}</p>
        <p><strong>Time:</strong> {flight.time}</p>
        <p><strong>Price:</strong> ₹{flight.price}</p>
        <hr />
      </div>
    ))}
    <p><em>Please login to book tickets.</em></p>
  </div>
);
}
export default GuestPage;
```

UserPage.js;

```
import React from 'react';
```

```
function UserPage()
{ return (
  <div>
    <h2>Welcome, User!</h2>
    <p>You can now book your flight tickets below.</p>
    <button>Book Ticket</button>
  </div>
);
}
```

```
export default UserPage;
```

App.js;

```
import React, { useState } from 'react';
import GuestPage from './GuestPage';
import UserPage from './UserPage';
```

```

function App() {
  const [isLoggedIn, setIsLoggedIn] = useState(false);


  const handleLogin = () => setIsLoggedIn(true);
  const handleLogout = () => setIsLoggedIn(false);

  return (
    <div className="App" style={{ textAlign: 'center', padding: '30px' }}>
      <h1> 🎫 Ticket Booking App</h1>

      {isLoggedIn ? (
        <>
          <UserPage />
          <button onClick={handleLogout}>Logout</button>
        </>
      ) : (
        <>
          <GuestPage />
          <button onClick={handleLogin}>Login</button>
        </>
      )}
    </div>
  );
}
export default App;

```

Output;

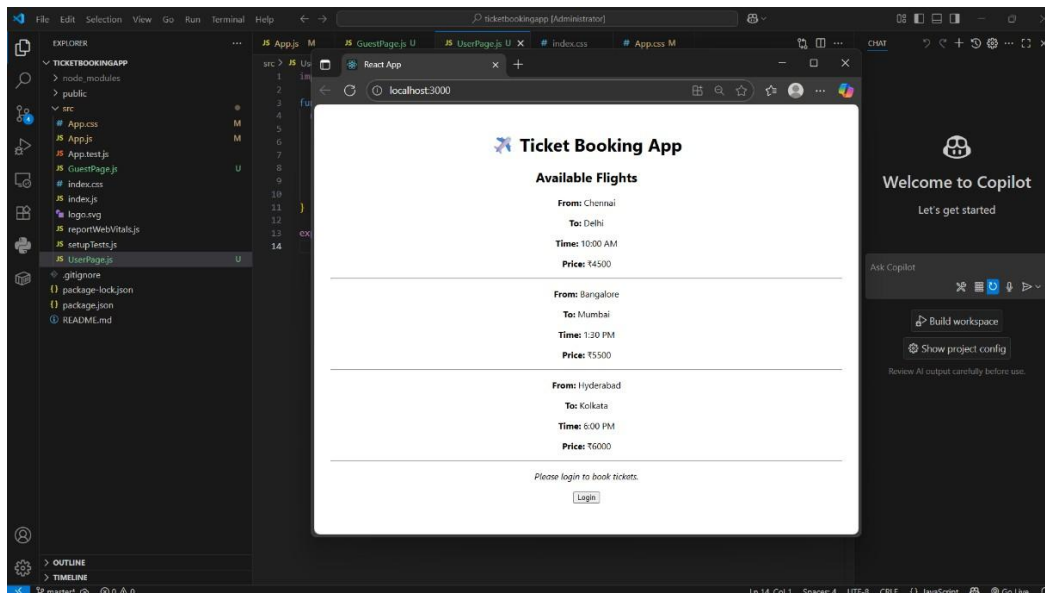

File name: 13. ReactJS-HOL

Name: Hands-on in this document

App.js;

```
import React, { useState } from 'react';
import BookDetails from './BookDetails';
import BlogDetails from './BlogDetails';
import CourseDetails from './CourseDetails';

function App() {
  const [selected, setSelected] = useState('book'); // default option

  // Conditional Rendering using element variable
  let content;
  if (selected === 'book') {
    content = <BookDetails />;
  } else if (selected === 'blog') {
    { content = <BlogDetails />; }
  } else if (selected === 'course') {
    { content = <CourseDetails />; }
  }

  // Conditional Rendering using function
  const renderComponent = () => {
    switch (selected)
    { case 'book':
      return <BookDetails />;
    case 'blog':
      return <BlogDetails />;
    case 'course':
      return <CourseDetails />;
    default:
      return <h3>Please select a component</h3>;
    }
  };

  return (
    <div className="App" style={{ textAlign: 'center', padding: '30px' }}>
      <h1>📝 Blogger App</h1>

      <select onChange={(e) => setSelected(e.target.value)} value={selected}>
        <option value="book">Book Details</option>
        <option value="blog">Blog Details</option>
        <option value="course">Course Details</option>
        <option value="none">None</option>
      </select>

      <hr />

      <h2>Using If...Else Variable:</h2>
    </div>
  );
}
```

```

    {content}
    <hr />
    <h2>Using Function with switch-case:</h2>
    {renderComponent()}
    <hr />
    <h2>Using Ternary Operator:</h2>
    {selected === 'book' ? <BookDetails /> :
      selected === 'blog' ? <BlogDetails /> :
      selected === 'course' ? <CourseDetails /> :
      <p>No selection made</p>}
    <hr />
    <h2>Using Logical && operator:</h2>
    {selected === 'book' && <BookDetails />}
    {selected === 'blog' && <BlogDetails />}
    {selected === 'course' && <CourseDetails />}
  </div>
);
}

```

```
export default App;
```

```
BlogDetails.js;
```

```
import React from 'react';
```

```

function BlogDetails()
{ return (
  <div>
    <h3>📖 Blog Details</h3>
    <p>Title: Understanding JSX</p>
    <p>Author: Jane Smith</p>
    <p>Date: August 7, 2025</p>
  </div>
);
}

```

```
export default BlogDetails;
```

```
BookDetails.js;
```

```
import React from 'react';
```

```

function BookDetails()
{ return (
  <div>
    <h3>📖 Book Details</h3>
    <p>Title: The React Handbook</p>
    <p>Author: John Doe</p>
    <p>Pages: 350</p>
  </div>
);
}

```

```
export default BookDetails;
```

```
CourseDetails.js;
```

```
import React from 'react';
```

```
function CourseDetails()  
{ return (  
  <div>  
    <h3>📖 Course Details</h3>  
    <p>Name: React for Beginners</p>  
    <p>Instructor: Alex Johnson</p>  
    <p>Duration: 6 weeks</p>  
  </div>  
);  
}
```

```
export default CourseDetails;
```

Output;

