CINEPHILE

TEAM MEMBERS:

ROLL NUMBER	NAME
THANIGAIVELAN P	22ALR105
PRANAV RAJA M	22ALR069
SUDHAKARAN S	22ALR096

INTRODUCTION:

In today's digital age, anime enthusiasts seek seamless and immersive platforms to explore, discuss, and manage their anime experiences. This project aims to meet these needs by developing a comprehensive web application tailored specifically for anime fans. Utilizing modern technologies, the frontend is built entirely with JavaScript and React, ensuring a dynamic and responsive user interface that enhances interactivity and user engagement. The backend is powered by a robust RESTful API, facilitating efficient and secure data management.

The application provides extensive details on a wide array of anime, including summaries, character information, episode guides, and user reviews, making it a one-stop destination for all anime-related information. Security measures such as JWT tokens and OAuth protocols safeguard user data and ensure authorized access, enhancing user trust.

Deployment on scalable cloud platforms like AWS or Heroku ensures reliability and performance, allowing the application to handle increased traffic smoothly. Continuous Integration/Continuous Deployment (CI/CD) pipelines enable regular updates and bug fixes with minimal downtime. By leveraging advanced web development practices, this anime project aspires to create a state-of-the-art solution for anime lovers, providing them with a secure, scalable, and user-friendly platform.

Key features:

1. Anime details are fetched in the API.
2. You can find the details about the anime in this web application.
3. Complete information about the individual characters.
4. Top 5 anime are listed the right side
5. Popular, Aring and Upcoming anime are listed.

REQUIREMENTS:

- **Front-End Programming**

    1. **CSS (Cascading Style Sheets):** CSS is used to define the visual appearance and layout of web pages. It allows developers to apply styles, such as colors, fonts, spacing, and positioning, to HTML elements, creating a visually appealing and consistent user interface.

    2. **JavaScript:** JavaScript is a powerful programming language that adds interactivity and dynamic behavior to web pages. It enables developers to manipulate and modify HTML and CSS, handle user interactions, perform calculations, validate forms, and make asynchronous requests to servers.

    3. **React:** React is a popular JavaScript library for building user interfaces. It provides a component-based approach to web development, allowing developers to create reusable UI components that update efficiently based on changes in data. React uses a virtual DOM (Document Object Model) to optimize performance and facilitate the building of complex web applications.

- **Back-End Programming**

    1. **APIs (Application Programming Interfaces)**: Backend developers build APIs that allow communication between the frontend and backend components of a web application. APIs define the protocols and rules for how different software components can interact and exchange data. Commonly used API standards include RESTful APIs and GraphQL.

UI DESIGN:

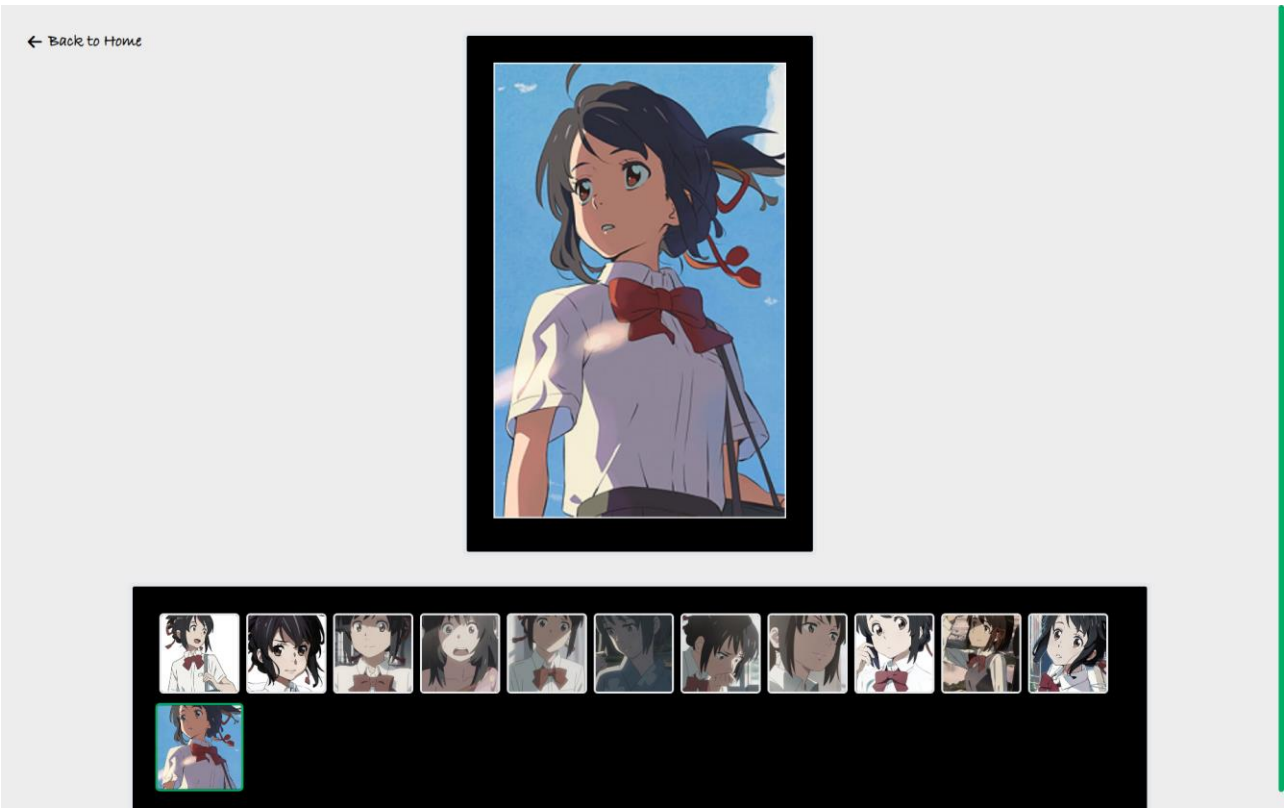

Characters

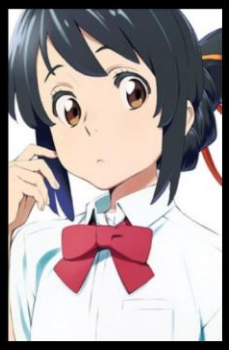

Miyamizu, Mitsuha

Main

Tachibana, Taki

Main

Fujii, Tsukasa

Supporting

localhost:3000/character/141482

Trailer

Characters



Kimi no Na wa.

Aired: Aug 26, 2016

Rating: PG-13 - Teens 13 or older

Rank: 28

Score: 8.84

Scored By: 1911806

Popularity: 11

Status: Finished Airing

Source: Original

Season:

Duration: 1 hr 46 min

Mitsuha Miyamizu, a high school girl, yearns to live the life of a boy in the bustling city of Tokyo—a dream that stands in stark contrast to her present life in the countryside. Meanwhile in the city, Taki Tachibana lives a busy life as a high school student while juggling his part-time job and hopes for a future in architecture. One day, Mitsuha awakens in a room that is not her own and suddenly finds herself living the dream life in Tokyo—but...Read More

Upcoming Anime

Popular | your name | Search | Airing | Upcoming

Top 5 Popular

Fullmetal Alchemist: Brotherhood

Steins;Gate

Upcoming Anime

Popular | Search Anime | Search | Airing | Upcoming

Top 5 Popular

Fullmetal Alchemist: Brotherhood

Steins;Gate

Airing Anime

Popular | Search Anime | Search | Airing | Upcoming

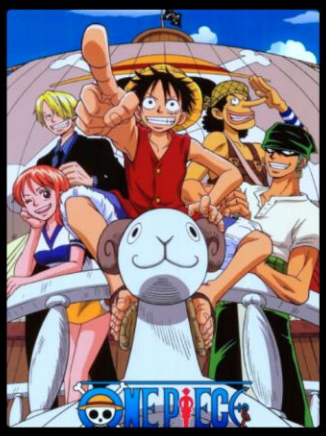

Top 5 Popular

Fullmetal Alchemist: Brotherhood

Steins;Gate

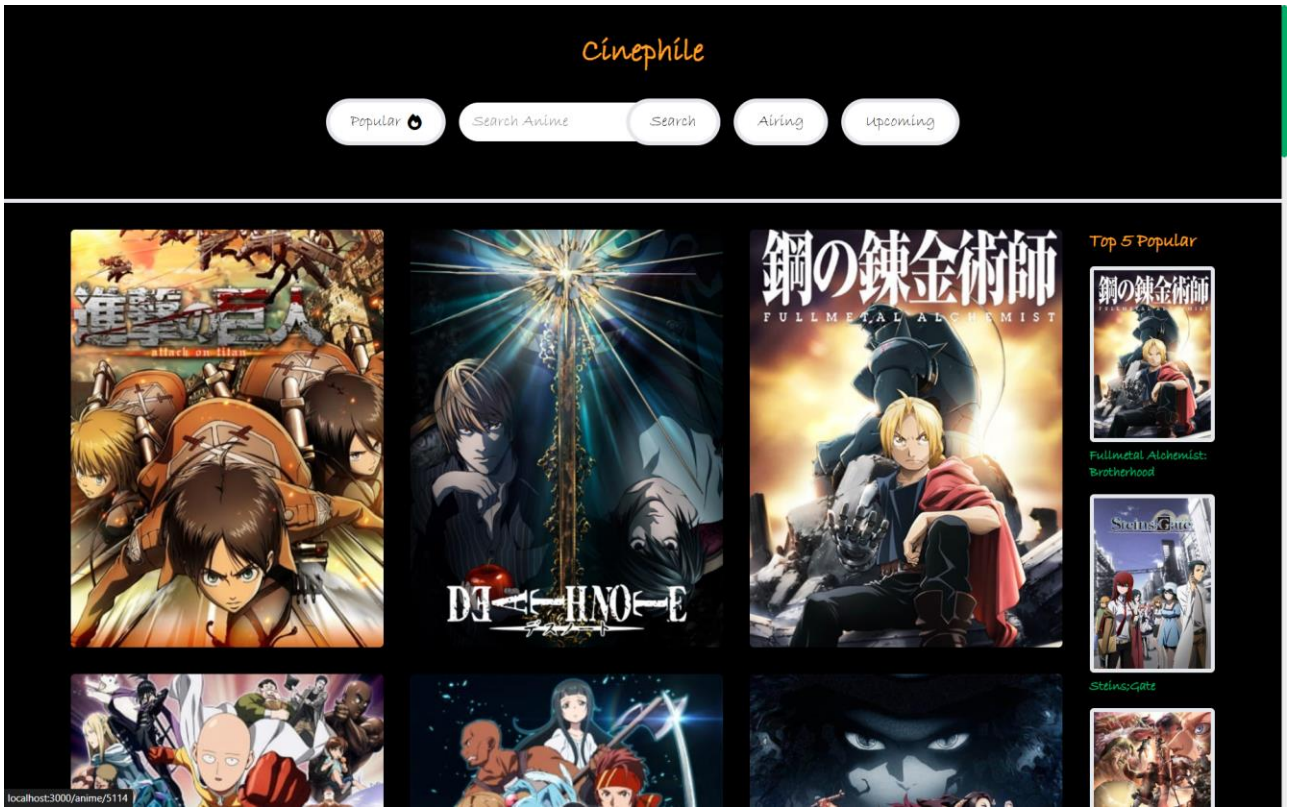
Cinephile
Popular
Search Anime
Search
Airing
Upcoming
Top 5 Popular
Fullmetal Alchemist: Brotherhood
Steins;Gate
localhost:3000/anime/5114

SAMPLE CODING:

Aring.js

```
import React from 'react'
import { Link } from 'react-router-dom'
import { useGlobalContext } from '../context/global'
import styled from 'styled-components'
import Sidebar from './Sidebar'

function Airing({rendered}) {
    const {airingAnime ,isSearch, searchResults} = useGlobalContext()

    const conditionalRender = () => {
        if(!isSearch && rendered === 'airing'){
            return airingAnime?.map((anime) => {
                return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                    <img src={anime.images.jpg.large_image_url} alt="" />
                </Link>
            })
        }else{
            return searchResults?.map((anime) => {
                return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                    <img src={anime.images.jpg.large_image_url} alt="" />
                </Link>
            })
        }
    }

    return (
        <PopularStyled>
            <div className="airing-anime">
                {conditionalRender()}
            </div>
            <Sidebar />
        </PopularStyled>
    )
}

const PopularStyled = styled.div`
    display: flex;
    .airing-anime{
        margin-top: 2rem;
        padding-top: 2rem;
        padding-bottom: 2rem;
        padding-left: 5rem;
```

```
        padding-right: 0;
        width: 100%;
        display: grid;
        grid-template-columns: repeat(auto-fill, minmax(300px, 1fr));
        grid-gap: 2rem;
        background-color: Black;
        border-top: 5px solid #e5e7eb;
        a{
            height: 500px;
            border-radius: 7px;
        }
        a img{
            width: 100%;
            height: 100%;
            object-fit: cover;
            border-radius: 5px;
        }
    }
`;

export default Airing
```

AnimeItems.js

```
import React, { useEffect } from 'react'
import { Link, useParams } from 'react-router-dom'
import styled from 'styled-components'

function AnimeItem() {
    const {id} = useParams()

    //state
    const [anime, setAnime] = React.useState({})
    const [characters, setCharacters] = React.useState([])
    const [showMore, setShowMore] = React.useState(false)

    //destructure anime
    const {
        title, synopsis,
        trailer,duration,aired,
        season, images, rank,
        score,scored_by, popularity,
        status, rating, source } = anime

    //get anime based on id
```

```
    const getAnime = async (anime) => {
        const response = await fetch(`https://api.jikan.moe/v4/anime/${anime}`)
        const data = await response.json()
        setAnime(data.data)
    }

    //get characters
    const getCharacters = async (anime) => {
        const response = await
fetch(`https://api.jikan.moe/v4/anime/${anime}/characters`)
        const data = await response.json()
        setCharacters(data.data)
        console.log(data.data)
    }


    //initial render
    useEffect(() => {
        getAnime(id)
        getCharacters(id)
    }, [])

    return (
        <AnimeItemStyled>
            <h1>{title}</h1>
            <div className="details">
                <div className="detail">
                    <div className="image">
                        <img src={images?.jpg.large_image_url} alt="" />
                    </div>
                    <div className="anime-details">
                        <p><span>Aired:</span><span>{aired?.string}</span></p>
                        <p><span>Rating:</span><span>{rating}</span></p>
                        <p><span>Rank:</span><span>{rank}</span></p>
                        <p><span>Score:</span><span>{score}</span></p>
                        <p><span>Scored By:</span><span>{scored_by}</span></p>
                        <p><span>Popularity:</span><span>{popularity}</span></p>
                        <p><span>Status:</span><span>{status}</span></p>
                        <p><span>Source:</span><span>{source}</span></p>
                        <p><span>Season:</span><span>{season}</span></p>
                        <p><span>Duration:</span><span>{duration}</span></p>
                    </div>
                </div>
                <p className="description">
```

```
                    {showMore ? synopsis : synopsis?.substring(0, 450) + '...'}
                    <button onClick={() => {
                        setShowMore(!showMore)
                    }}>{showMore ? 'Show Less': 'Read More'}</button>
                </p>
            </div>
            <h3 className="title">Trailer</h3>
            <div className="trailer-con">
                {trailer?.embed_url ?
                    <iframe
                        src={trailer?.embed_url}
                        title="Inline Frame Example"
                        width="800"
                        height="450"
                        allow="accelerometer; autoplay; clipboard-write; encrypted-
media; gyroscope; picture-in-picture"
                        allowFullScreen>
                    </iframe> :
                    <h3>Trailer not available</h3>
                }
            </div>
            <h3 className="title">Characters</h3>
            <div className="characters">
                {characters?.map((character, index) => {
                    const {role} = character
                    const {images, name, mal_id} = character.character
                    return <Link to={`/character/${mal_id}`} key={index}>
                        <div className="character">
                            <img src={images?.jpg.image_url} alt="" />
                            <h4>{name}</h4>
                            <p>{role}</p>
                        </div>
                    </Link>
                })}
            </div>
        </AnimeItemStyled >
    )
}

const AnimeItemStyled = styled.div`
    padding: 3rem 18rem;
    background-color: Black;
    h1{
        display: inline-block;
        font-size: 3rem;
```

```
        margin-bottom: 1.5rem;
        cursor: pointer;
        background:linear-gradient( to right, #A855F7, #27AE60);
        -webkit-background-clip: text;
        -webkit-text-fill-color: transparent;
        transition: all .10s ease-in-out;
        &:hover{
            transform: skew(-3deg);
        }
    }
    .title{
        display: inline-block;
        margin: 3rem 0;
        font-size: 2rem;
        cursor: pointer;
        background:linear-gradient( to right, #A855F7 23%, #27AE60);
        -webkit-background-clip: text;
        -webkit-text-fill-color: transparent;
    }

    .description{
        margin-top: 2rem;
        color: White;
        line-height: 1.7rem;
        button{
            background-color: transparent;
            border: none;
            outline: none;
            cursor: pointer;
            font-size: 1.2rem;
            color: #27AE60;
            font-weight: 600;
        }
    }

    .trailer-con{
        display: flex;
        justify-content: center;
        align-items: center;
        iframe{
            outline: none;
            padding: 1.5rem;
            border-radius: 10px;
            background-color: #FFFFFF;
```

```
        }
    }

    .details{
        background-color: Black;
        border-radius: 20px;
        padding: 2rem;
        border: 5px solid #e5e7eb;
        .detail{
            display: grid;
            grid-template-columns: repeat(2, 1fr);
            img{
                border-radius: 7px;
            }
        }
        .anime-details{
            display: flex;
            flex-direction: column;
            justify-content: space-between;
            p{
                display: flex;
                gap: 1rem;
            }
            p span:first-child{
                font-weight: 600;
                color: White;
            }
        }
    }

    .characters{
        display: grid;
        grid-template-columns: repeat(auto-fill, minmax(200px, 1fr));
        grid-gap: 2rem;
        background-color: Black;
        padding: 2rem;
        .character{
            padding: .4rem .6rem;
            border-radius: 7px;
            background-color: Black;
            transition: all .10s ease-in-out;
            img{
                width: 100%;
            }
```

```
            h4{
                padding: .5rem 0;
                color: White;
            }
            p{
                color: #27AE60;
            }
            &:hover{
                transform: translateY(-5px);
            }
        }
    }
`;

export default AnimeItem
```

Gallery.js

```
import React from 'react'
import { Link, useParams } from 'react-router-dom';
import styled from 'styled-components'
import { useGlobalContext } from '../context/global';

function Gallery() {
    const {getAnimePictures, pictures} = useGlobalContext()
    const {id} = useParams();

    //state
    const [index, setIndex] = React.useState(0);

    const handleImageClick = (i) => {
        setIndex(i)
    }


    React.useEffect(() => {
        getAnimePictures(id)
    }, [id])

    return (
        <GalleryStyled>
            <div className="back">
                <Link to="/">
                    <i className="fas fa-arrow-left"></i>
                    Back to Home
                </Link>
```

```
            </div>
            <div className="big-image">
                <img src={pictures[index]?.jpg.image_url} alt="" />
            </div>
            <div className="small-images">
                {pictures?.map((picture, i) => {
                    return <div className="image-con" onClick={()=>{
                        handleImageClick(i)
                    }} key={i}>
                        <img
                            src={picture?.jpg.image_url}
                            style={{
                                border: i === index ? "3px solid #27AE60" : "3px
solid #e5e7eb",
                                filter: i === index ? 'grayscale(0)' :
'grayscale(60%)',
                                transform: i === index ? 'scale(1.1)' : 'scale(1)',
                                transition: 'all .3s ease-in-out'
                            }}
                            alt=""
                        />
                    </div>
                })}
            </div>
        </GalleryStyled>
    )
}

const GalleryStyled = styled.div`
    background-color: #EDEDED;
    min-height: 100vh;
    display: flex;
    flex-direction: column;
    align-items: center;
    .back{
        position: absolute;
        top: 2rem;
        left: 2rem;
        a{
            font-weight: 600;
            text-decoration: none;
            color: Black;
            display: flex;
            align-items: center;
            gap: .5rem;
```

```
        }
    }
    .big-image{
        display: inline-block;
        padding: 2rem;
        margin: 2rem 0;
        background-color: Black;
        border-radius: 7px;
        border: 5px solid #e5e7eb;
        position: relative;
        img{
            width: 350px;
        }
    }

    .small-images{
        display: flex;
        flex-wrap: wrap;
        gap: .5rem;
        width: 80%;
        padding: 2rem;
        border-radius: 7px;
        background-color: Black;
        border: 5px solid #e5e7eb;
        img{
            width: 6rem;
            height: 6rem;
            object-fit: cover;
            cursor: pointer;
            border-radius: 5px;
            border: 3px solid #e5e7eb;
        }
    }
`;

export default Gallery
```

Homepage.js

```
import React from 'react'
import { useGlobalContext } from '../context/global'
import Popular from './Popular'
import styled from 'styled-components'
import Upcoming from './Upcoming'
import Airing from './Airing'
```

```
function Homepage() {

    const {handleSubmit,
        search,
        searchAnime,
        handleChange ,
        getUpcomingAnime,
        getAiringAnime,
        getPopularAnime,
    } = useGlobalContext()

    const [rendered, setRendered] = React.useState('popular')

    const switchComponent = () => {
        switch(rendered){
            case 'popular':
                return <Popular rendered={rendered} />
            case 'airing':
                return <Airing rendered={rendered} />
            case 'upcoming':
                return <Upcoming rendered={rendered} />
            default:
                return <Popular rendered={rendered} />
        }
    }

    return (
        <HomepageStyled>
            <header>
                <div className="logo">
                    <h1>
                        {rendered === 'popular' ? 'Cinephile' :
                        rendered === 'airing' ? 'Airing Anime' : 'Upcoming Anime'}
                    </h1>
                </div>
                <div className="search-container">
                    <div className="filter-btn popular-filter">
                        <button onClick={() => {
                            setRendered('popular')
                        }}>Popular<i className="fas fa-fire"></i></button>
                    </div>
                    <form action="" className="search-form"
onSubmit={handleSubmit}>
                        <div className="input-control">
```

```
                            <input type="text" placeholder="Search Anime"
value={search} onChange={handleChange} />
                            <button type="submit">Search</button>
                        </div>
                    </form>
                    <div className="filter-btn airing-filter">
                        <button onClick={() => {
                            setRendered('airing')
                            getAiringAnime()
                        }}>Airing</button>
                    </div>
                    <div className="filter-btn upcoming-filter">
                        <button onClick={() => {
                            setRendered('upcoming')
                            getUpcomingAnime()
                        }}>Upcoming</button>
                    </div>
                </div>
            </header>
            {switchComponent()}
        </HomepageStyled>
    )
}

const HomepageStyled = styled.div`
    background-color: #000;
    font-family: 'Bradley Hand ITC', cursive;
    header{
        padding: 2rem 5rem;
        width: 60%;
        margin: 0 auto;
        transition: all .10s ease-in-out;
        @media screen and (max-width:1530px){
            width: 95%;
        }
        .logo{
            display: flex;
            align-items: center;
            justify-content: center;
            margin-bottom: 2rem;
        }
        .search-container{
            display: flex;
            align-items: center;
            justify-content: center;
```

```
            gap: 1rem;
            button{
                display: flex;
                align-items: center;
                gap: .5rem;
                padding: .7rem 1.5rem;
                outline: none;
                border-radius: 30px;
                font-size: 1.2rem;
                background-color: #fff;
                cursor: pointer;
                transition: all .410s ease-in-out;
                font-family: inherit;
                border: 5px solid #e5e7eb;
            }
            form{
                position: relative;
                width: 100%;
                .input-control{
                    position: relative;
                    transition: all .10s ease-in-out;
                }
                .input-control input{
                    width: 100%;
                    padding:.7rem 1rem;
                    border: none;
                    outline: none;
                    border-radius: 30px;
                    font-size: 1.2rem;
                    background-color: #fff;
                    transition: all .10s ease-in-out;
                }
                .input-control button{
                    position: absolute;
                    right: 0;
                    top: 50%;
                    transform: translateY(-50%);
                }
            }
        }
    }
`

export default Homepage
```

Popular.js

```
import React from 'react'
import { Link } from 'react-router-dom'
import { useGlobalContext } from '../context/global'
import styled from 'styled-components'
import Sidebar from './Sidebar'

function Popular({rendered}) {
    const {popularAnime,isSearch, searchResults} = useGlobalContext()

    const conditionalRender = () => {
        if(!isSearch && rendered === 'popular'){
            return popularAnime?.map((anime) => {
                return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                    <img src={anime.images.jpg.large_image_url} alt="" />
                </Link>
            })
        }else{
            return searchResults?.map((anime) => {
                return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                    <img src={anime.images.jpg.large_image_url} alt="" />
                </Link>
            })
        }
    }

    return (
        <PopularStyled>
            <div className="popular-anime">
                {conditionalRender()}
            </div>
            <Sidebar />
        </PopularStyled>
    )
}

const PopularStyled = styled.div`
    display: flex;
    .popular-anime{
        margin-top: 2rem;
        padding-top: 2rem;
        padding-bottom: 2rem;
        padding-left: 5rem;
```

```
        padding-right: 0;
        width: 100%;
        display: grid;
        grid-template-columns: repeat(auto-fill, minmax(300px, 1fr));
        grid-gap: 2rem;
        background-color: Black;
        border-top: 5px solid #e5e7eb;
        a{
            height: 500px;
            border-radius: 7px;
        }
        a img{
            width: 100%;
            height: 100%;
            object-fit: cover;
            border-radius: 5px;
        }
    }
`;

export default Popular
```

Sidebar.js

```
import React from 'react'
import { Link } from 'react-router-dom';
import styled from 'styled-components'
import { useGlobalContext } from '../context/global';


function Sidebar() {
    const {popularAnime} = useGlobalContext()

    const sorted = popularAnime?.sort((a,b) => {
        return b.score - a.score
    })

    return (
        <SidebarStyled>
            <h3>Top 5 Popular</h3>
            <div className="anime">
                {sorted?.slice(0,5).map((anime) => {
                    return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                        <img src={anime.images.jpg.large_image_url} alt="" />
                        <h5>
                            {anime.title}
```

```
                        </h5>
                    </Link>
                })}
            </div>
        </SidebarStyled>
    )
}

const SidebarStyled = styled.div`
    margin-top: 2rem;
    background-color: Black;
    border-top: 5px solid #e5e7eb;
    padding-right: 5rem;
    padding-left: 2rem;
    padding-top: 2rem;
    .anime{
        display: flex;
        flex-direction: column;
        width: 150px;
        img{
            width: 100%;
            border-radius: 5px;
            border: 5px solid #e5e7eb;
        }
        a{
            margin-top: 1rem;
            display: flex;
            flex-direction: column;
            gap: .4rem;
            color: #27AE60;
            h4{
                font-size: 1.1rem;
            }
        }
    }
`;

export default Sidebar
```

Upcoming.js

```
import React from 'react'
import { Link } from 'react-router-dom'
import { useGlobalContext } from '../context/global'
import styled from 'styled-components'
import Sidebar from './Sidebar'
```

```
function Upcoming({rendered}) {
    const {upcomingAnime ,isSearch, searchResults} = useGlobalContext()

    const conditionalRender = () => {
        if(!isSearch && rendered === 'upcoming'){
            return upcomingAnime?.map((anime) => {
                return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                    <img src={anime.images.jpg.large_image_url} alt="" />
                </Link>
            })
        }else{
            return searchResults?.map((anime) => {
                return <Link to={`/anime/${anime.mal_id}`} key={anime.mal_id}>
                    <img src={anime.images.jpg.large_image_url} alt="" />
                </Link>
            })
        }
    }

    return (
        <PopularStyled>
            <div className="upcoming-anime">
                {conditionalRender()}
            </div>
            <Sidebar />
        </PopularStyled>
    )
}

const PopularStyled = styled.div`
    display: flex;
    .upcoming-anime{
        margin-top: 2rem;
        padding-top: 2rem;
        padding-bottom: 2rem;
        padding-left: 5rem;
        padding-right: 0;
        width: 100%;
        display: grid;
        grid-template-columns: repeat(auto-fill, minmax(300px, 1fr));
        grid-gap: 2rem;
        background-color: Black;
        a{
```

```
            height: 500px;
            border-radius: 7px;
            border: 5px solid #e5e7eb;
        }
        a img{
            width: 100%;
            height: 100%;
            object-fit: cover;
        }
    }
`;

export default Upcoming
```

Global.js

```
import React, {createContext, useContext, useReducer} from "react";

const GlobalContext = createContext();

const baseUrl = "https://api.jikan.moe/v4";

//actions
const LOADING = "LOADING";
const SEARCH = "SEARCH";
const GET_POPULAR_ANIME = "GET_POPULAR_ANIME";
const GET_UPCOMING_ANIME = "GET_UPCOMING_ANIME";
const GET_AIRING_ANIME = "GET_AIRING_ANIME";
const GET_PICTURES = "GET_PICTURES";

//reducer
const reducer = (state, action) => {
    switch(action.type){
        case LOADING:
            return {...state, loading: true}
        case GET_POPULAR_ANIME:
            return {...state, popularAnime: action.payload, loading: false}
        case SEARCH:
            return {...state, searchResults: action.payload, loading: false}
        case GET_UPCOMING_ANIME:
            return {...state, upcomingAnime: action.payload, loading: false}
        case GET_AIRING_ANIME:
            return {...state, airingAnime: action.payload, loading: false}
        case GET_PICTURES:
            return {...state, pictures: action.payload, loading: false}
        default:
```

```
            return state;
    }
}


export const GlobalContextProvider = ({children}) => {
    //intial state
    const intialState = {
        popularAnime: [],
        upcomingAnime: [],
        airingAnime: [],
        pictures: [],
        isSearch: false,
        searchResults: [],
        loading: false,
    }

    const [state, dispatch] = useReducer(reducer, intialState);
    const [search, setSearch] = React.useState('');


    //handle change
    const handleChange = (e) => {
        setSearch(e.target.value);
        if(e.target.value === ''){
            state.isSearch = false;
        }
    }


    //handle submit
    const handleSubmit = (e) => {
        e.preventDefault();
        if(search){
            searchAnime(search);
            state.isSearch = true;
        }else{
            state.isSearch = false;
            alert('Please enter a search term')
        }
    }

    //fetch popular anime
    const getPopularAnime = async () => {
```

```
        dispatch({type: LOADING})
        const response = await fetch(`${baseUrl}/top/anime?filter=bypopularity`);
        const data = await response.json();
        dispatch({type: GET_POPULAR_ANIME, payload: data.data})
    }

    //fetch upcoming anime
    const getUpcomingAnime = async () => {
        dispatch({type: LOADING})
        const response = await fetch(`${baseUrl}/top/anime?filter=upcoming`);
        const data = await response.json();
        dispatch({type: GET_UPCOMING_ANIME, payload: data.data})
    }


    //fetch airing anime
    const getAiringAnime = async () => {
        dispatch({type: LOADING})
        const response = await fetch(`${baseUrl}/top/anime?filter=airing`);
        const data = await response.json();
        dispatch({type: GET_AIRING_ANIME, payload: data.data})
    }

    //search anime
    const searchAnime = async (anime) => {
        dispatch({type: LOADING})
        const response = await
fetch(`https://api.jikan.moe/v4/anime?q=${anime}&order_by=popularity&sort=asc&sfw`)
;
        const data = await response.json();
        dispatch({type: SEARCH, payload: data.data})
    }

    //get anime pictures
    const getAnimePictures = async (id) => {
        dispatch({type: LOADING})
        const response = await
fetch(`https://api.jikan.moe/v4/characters/${id}/pictures`);
        const data = await response.json();
        dispatch({type: GET_PICTURES, payload: data.data})
    }

    //initial render
    React.useEffect(() => {
```

```
        getPopularAnime();
    }, [])

    return(
        <GlobalContext.Provider value={{
            ...state,
            handleChange,
            handleSubmit,
            searchAnime,
            search,
            getPopularAnime,
            getUpcomingAnime,
            getAiringAnime,
            getAnimePictures
        }}>
            {children}
        </GlobalContext.Provider>
    )
}

export const useGlobalContext = () => {
    return useContext(GlobalContext);
}
```

App.js

```
import { BrowserRouter, Routes, Route } from "react-router-dom";
import AnimeItem from "./Components/AnimeItem";
import Gallery from "./Components/Gallery";
import Homepage from "./Components/Homepage";

function App() {

  return (
    <BrowserRouter>
      <Routes>
        <Route path="/" element={<Homepage />} />
        <Route path="/anime/:id" element={<AnimeItem />} />
        <Route path="/character/:id" element={<Gallery />} />
      </Routes>
    </BrowserRouter>
  );
}

export default App;
```

Globalstyls.js

```
import { createGlobalStyle } from 'styled-components';

const GlobalStyle = createGlobalStyle`
    @import
url('https://fonts.googleapis.com/css2?family=Inter:wght@400;500;600;700;800&displa
y=swap');
    *{
        margin: 0;
        padding: 0;
        box-sizing: border-box;
        list-style: none;
        text-decoration: none;
        font-family: 'Bradley Hand ITC', cursive;
    }

    body{
        background-color: black;
        color: orange;
        font-size: 1.2rem;
        &::-webkit-scrollbar{
            width: 7px;
        }
        &::-webkit-scrollbar-thumb{
            background-color: #27AE60;
            border-radius: 10px;
        }
        &::-webkit-scrollbar-track{
            background-color: #EDEDED;
        }
    }
`;

export default GlobalStyle;
```

Index.js

```
import React from 'react';
import ReactDOM from 'react-dom/client';
import App from './App';
import { GlobalContextProvider } from './context/global';
import GlobalStyle from './Gloabalstyle';

const root = ReactDOM.createRoot(document.getElementById('root'));
```

```
root.render(
  <React.StrictMode>
    <GlobalStyle />
    <GlobalContextProvider>
      <App />
    </GlobalContextProvider>
  </React.StrictMode>
);
```

CONCLUSION:

In conclusion, this cinephile project successfully integrated modern technologies to develop a robust and user-friendly web application. The frontend, fully built with JavaScript and React, provided a dynamic and responsive interface, enhancing the user experience with interactive features and seamless navigation. The backend, constructed entirely using a RESTful API, ensured secure and efficient data management and processing.

A major accomplishment was the effective implementation of this API, facilitating seamless communication between the client and server and ensuring consistent and accurate data exchange.

Deployment on cloud platforms such as GIT ensured the application's scalability and reliability, allowing it to handle increased traffic smoothly. Continuous Integration/Continuous Deployment (CI/CD) pipelines further enabled regular updates and bug fixes with minimal downtime. This project exemplified the cohesive integration of modern technologies and best practices, resulting in a high-quality, scalable, and secure web application tailored for cinephiles.