VIDEO ANNOTATION PORTFOLIO

Structured signal, frame by frame.

Sample annotation work across six video task types, in the output formats labeling pipelines actually expect: persistent track IDs, timecoded segments, shot boundaries, and per-frame flags. Built by Pranav, a BCA (AI & ML) student.

SAMPLE · OBJECT TRACKING



TASK · TRACK | 1 object · persistent ID · 1920×1080 source

Object Tracking

Tracking the same object across consecutive frames, keeping one consistent ID as its position and size change — the annotation format behind autonomous-driving and surveillance datasets.




View per-frame JSON output ▸

```
[
  {"frame": 0, "timestamp": "00:00.00", "track_id": "car_01", "bbox": [120, 410, 260, 150]},
  {"frame": 30, "timestamp": "00:01.00", "track_id": "car_01", "bbox": [360, 405, 265, 155]},
  {"frame": 60, "timestamp": "00:02.00", "track_id": "car_01", "bbox": [610, 400, 270, 160]},
  {"frame": 90, "timestamp": "00:03.00", "track_id": "car_01", "bbox": [860, 395, 275, 165]}
]
```


TASK · SEG | 4 actions · 14-second clip · start/end timecodes

Temporal Action Segmentation

Marking the start and end timecode of each distinct action in a clip — the format behind activity-recognition and workplace-safety datasets.

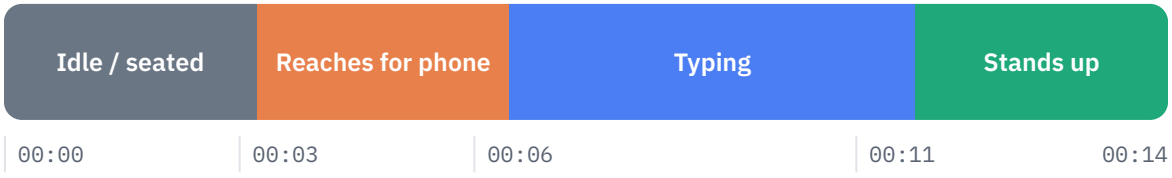


View JSON output ▸


```
[
  {"label": "Idle / seated", "start": "00:00", "end": "00:03"},
  {"label": "Reaches for phone", "start": "00:03", "end": "00:06"},
  {"label": "Typing", "start": "00:06", "end": "00:11"},
  {"label": "Stands up", "start": "00:11", "end": "00:14"}
]
```


TASK · CLS | 4 categories · whole-clip label · confidence-ranked


Video Classification

Sorting an entire clip into a fixed content category — the first pass before any frame-level work happens.

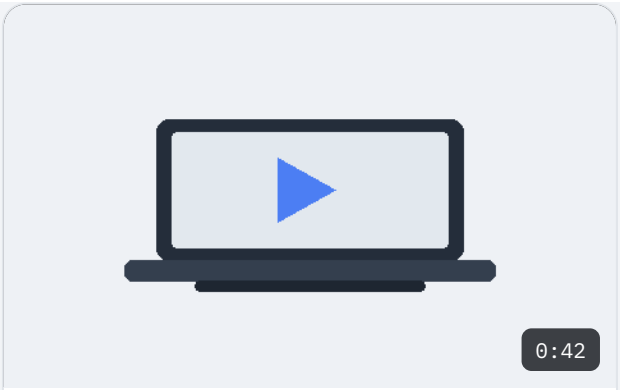

Screen recording with voiceover, walking through a step-by-step software setup.

Tutorial / How-To confidence 0.96

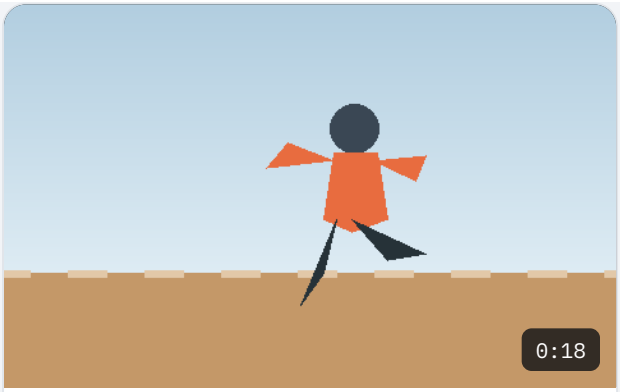

Handheld footage of a 400m sprint finish at a track meet.

Sports Highlight confidence 0.98



Studio shot of a single product rotating with on-screen spec callouts.

Product Review confidence 0.93




Static camera, coffee shop setting, casual to-camera narration.

Vlog / Lifestyle confidence 0.95

TASK · SHOT | 25-second clip · 4 cuts detected · 5 shots

Shot Boundary Detection

Detecting hard cuts and scene changes so a long recording can be split, indexed, and searched shot by shot.

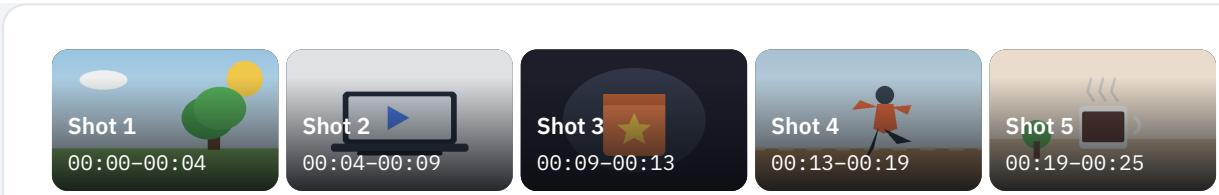

TASK · CAP | 4 timestamped lines · English + Hindi

Timestamped Captioning

Writing short, timecoded descriptions of on-screen action — used for accessibility audio-description, search indexing, and training video-language models.

00:00	A person walks into frame from the left and sits down at a desk.
00:04	They pick up a smartphone and check the screen.
00:08	वे लैपटॉप पर टाइप करना शुरू करते हैं। ve laptop par type karna shuru karte hain — "They begin typing on the laptop."
00:14	They close the laptop and stand up to leave.

TASK · FLAG | 5 checks · per-segment safety & quality review

Frame-Level Content & Quality Flagging

Reviewing a clip segment by segment for content-safety and technical-quality signals before it's used for training or publishing.

00:00–00:14	Face visible on screen	clear
00:00–00:14	Safe for all audiences	clear
00:06–00:07	Motion blur detected	flag for review
00:00–00:14	On-screen text / overlay	none detected
00:11–00:14	Low-light / underexposed	flag for review

Formats & conventions covered

- Persistent track IDs (MOT-style)
- Timecoded JSON segments
- Shot-boundary indexing
- Whole-clip classification
- Accessibility captioning
- Hindi captioning

Companion piece to the text/image data-annotation portfolio — same underlying rigor, applied to video. Comfortable working in whatever schema a project already uses (MOT, COCO-video, custom JSON, or a client's own spec).