


Hands on 1

Spring Data JPA - Quick Example

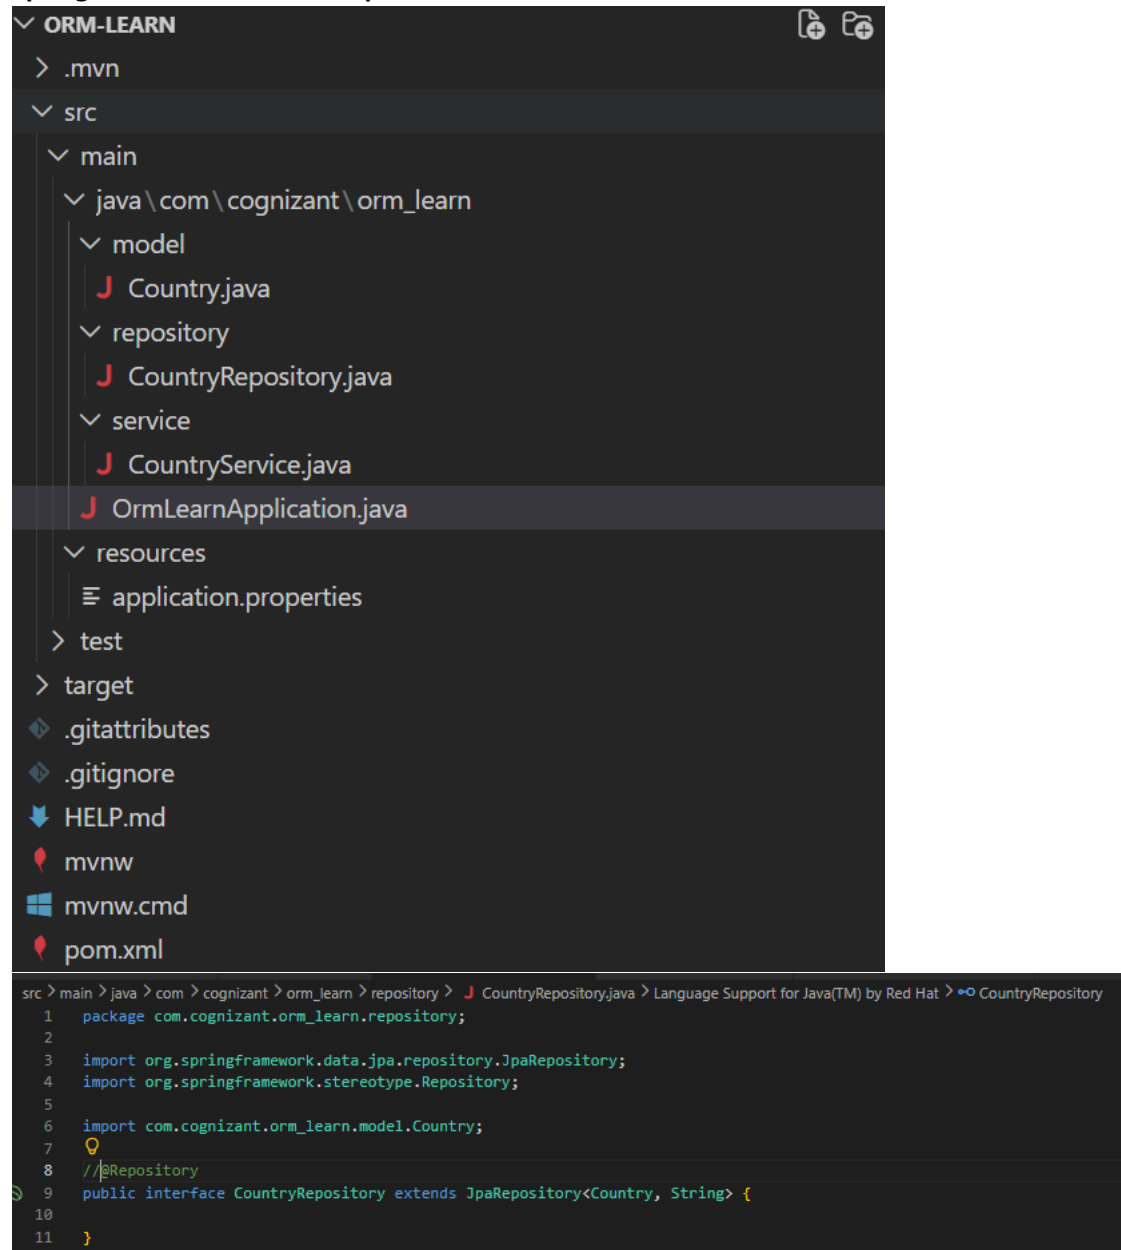

The screenshot shows an IDE with a project named "ORM-LEARN". The project structure is as follows:

- src
 - main
 - java\com\cognizant\orm_learn
 - model
 - Country.java
 - repository
 - CountryRepository.java
 - service
 - CountryService.java
 - OrmLearnApplication.java
 - resources
 - application.properties
 - test
 - target
 - .gitattributes
 - .gitignore
 - HELP.md
 - mvnw
 - mvnw.cmd
 - pom.xml

The code editor shows the content of `CountryRepository.java`:

```
src > main > java > com > cognizant > orm_learn > repository > CountryRepository.java > Language Support for Java(TM) by Red Hat > CountryRepository
1 package com.cognizant.orm_learn.repository;
2
3 import org.springframework.data.jpa.repository.JpaRepository;
4 import org.springframework.stereotype.Repository;
5
6 import com.cognizant.orm_learn.model.Country;
7
8 // @Repository
9 public interface CountryRepository extends JpaRepository<Country, String> {
10
11 }
```

```
src > main > java > com > cognizant > orm_learn > service > J countryService.java > ...
1 package com.cognizant.orm_learn.service;
2
3 import java.util.List;
4
5 import org.springframework.beans.factory.annotation.Autowired;
6 import org.springframework.stereotype.Service;
7
8 import com.cognizant.orm_learn.model.Country;
9 import com.cognizant.orm_learn.repository.CountryRepository;
10
11 import jakarta.transaction.Transactional;
12
13 @Service
14 public class CountryService {
15
16     // @Autowired
17     private CountryRepository countryRepository;
18
19     @Transactional
20     public List<Country> getAllCountries() {
21         return countryRepository.findAll();
22     }
23 }
```

```
src > main > java > com > cognizant > orm_learn > J OrmLearnApplication.java > Language Support for Java(TM) by Red Hat > OrmLearnApplication > main(String[])
1 package com.cognizant.orm_learn;
2
3 import java.util.List;
4
5 import org.slf4j.Logger;
6 import org.slf4j.LoggerFactory;
7
8 import org.springframework.boot.SpringApplication;
9 import org.springframework.boot.autoconfigure.SpringBootApplication;
10 import org.springframework.context.ApplicationContext;
11
12 import com.cognizant.orm_learn.model.Country;
13 import com.cognizant.orm_learn.service.CountryService;
14
15 @SpringBootApplication
16 public class OrmLearnApplication {
17
18     private static final Logger LOGGER =
19         LoggerFactory.getLogger(OrmLearnApplication.class);
20
21     private static CountryService countryService;
22
23     Run | Debug
24     public static void main(String[] args) {
25
26         ApplicationContext context =
27             SpringApplication.run(OrmLearnApplication.class, args);
28
29         countryService = context.getBean(CountryService.class);
30
31         LOGGER.info("Inside main");
32
33         testGetAllCountries();
34
35     private static void testGetAllCountries() {
36
37         LOGGER.info("Start");
38
39         List<Country> countries =
40             countryService.getAllCountries();
41
42         LOGGER.debug("countries={}", countries);
43
44         LOGGER.info("End");
45     }
46 }
```

... 51 common frames omitted

```
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 9.991 s
[INFO] Finished at: 2026-07-03T12:06:28+05:30
[INFO] -----
```