

Configure IP address to routers in packet tracer. Explore the following messages ping, responses, des na on unreachable ,request med out, reply.

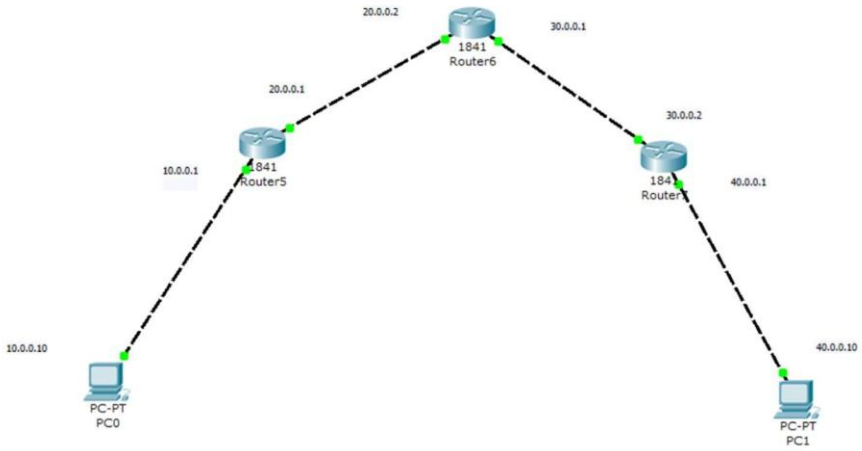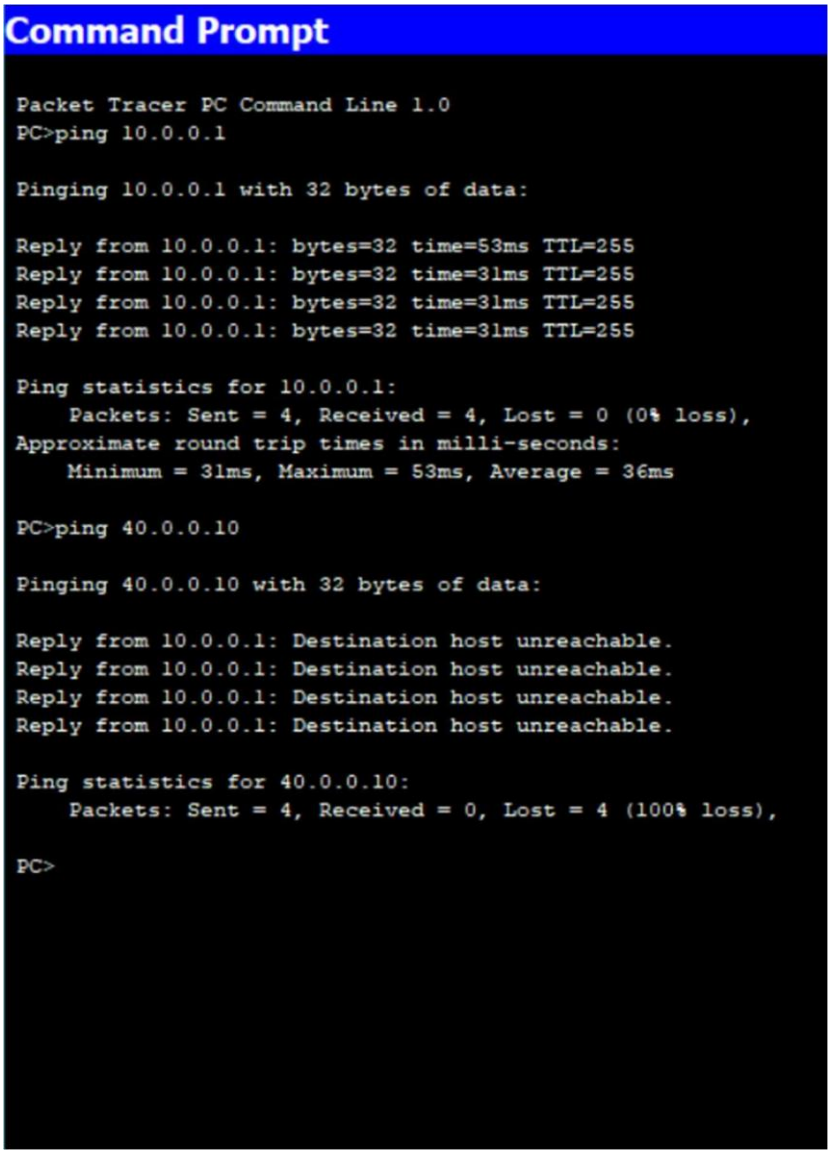


Output:


Command Prompt
Packet Tracer PC Command Line 1.0
PC>ping 10.0.0.1
Pinging 10.0.0.1 with 32 bytes of data:
Reply from 10.0.0.1: bytes=32 time=53ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Reply from 10.0.0.1: bytes=32 time=31ms TTL=255
Ping statistics for 10.0.0.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 31ms, Maximum = 53ms, Average = 36ms
PC>ping 40.0.0.10
Pinging 40.0.0.10 with 32 bytes of data:
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
PC>

2) Configure IP address to routers in packet tracer. Explore the following messages: ping responses, destination unreachable, request timed out, reply

topology

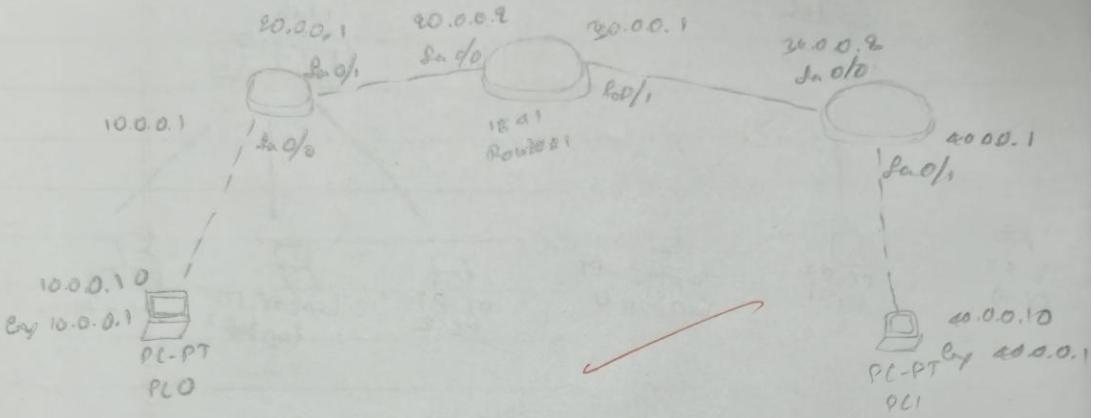

output

PC> ping 10.0.0.1

pinging 10.0.0.1 with 32 bytes of data:

Request timed out.

Request timed out.

PC> ping 40.0.0.10

pinging 40.0.0.10 with 32 bytes of data

Reply from 10.0.0.1 : Destination host unreachable

PC> ping 10.0.0.1

Reply from 10.0.0.1 : bytes=32 time=24ms TTL=250

28/9/24