
ASSIGNMENT 2
112_Prasad Swami_AC

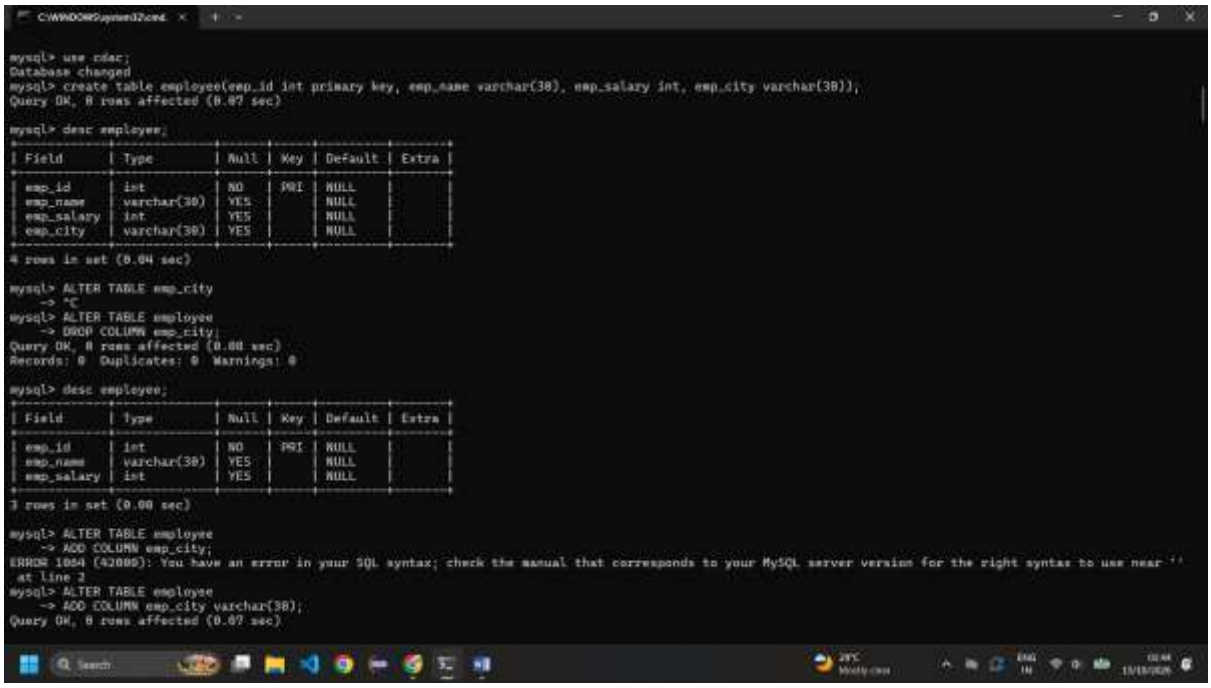


```
mysql> use cdac;
Database changed
mysql> create table employee(emp_id int primary key, emp_name varchar(30), emp_salary int, emp_city varchar(30));
Query OK, 0 rows affected (0.07 sec)

mysql> desc employee;
+------------+-------------+------+-----+---------+-------+
| Field      | Type        | Null | Key | Default | Extra |
+------------+-------------+------+-----+---------+-------+
| emp_id     | int         | NO   | PRI | NULL    |       |
| emp_name   | varchar(30) | YES  |     | NULL    |       |
| emp_salary | int         | YES  |     | NULL    |       |
| emp_city   | varchar(30) | YES  |     | NULL    |       |
+------------+-------------+------+-----+---------+-------+
4 rows in set (0.04 sec)

mysql> ALTER TABLE emp_city
    -> ^C
mysql> ALTER TABLE employee
    -> DROP COLUMN emp_city;
Query OK, 0 rows affected (0.08 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> desc employee;
+------------+-------------+------+-----+---------+-------+
| Field      | Type        | Null | Key | Default | Extra |
+------------+-------------+------+-----+---------+-------+
| emp_id     | int         | NO   | PRI | NULL    |       |
| emp_name   | varchar(30) | YES  |     | NULL    |       |
| emp_salary | int         | YES  |     | NULL    |       |
+------------+-------------+------+-----+---------+-------+
3 rows in set (0.00 sec)

mysql> ALTER TABLE employee
    -> ADD COLUMN emp_city;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near ''
 at line 2
mysql> ALTER TABLE employee
    -> ADD COLUMN emp_city varchar(30);
Query OK, 0 rows affected (0.07 sec)
```

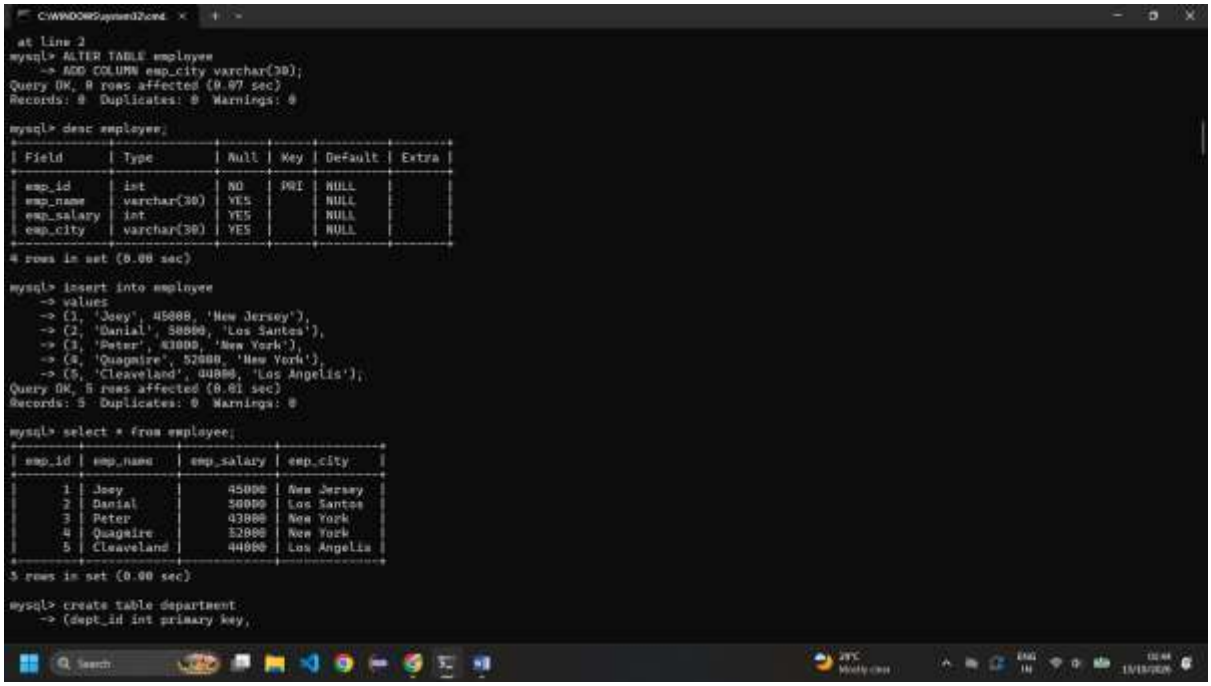


```
 at line 2
mysql> ALTER TABLE employee
    -> ADD COLUMN emp_city varchar(30);
Query OK, 0 rows affected (0.07 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> desc employee;
+------------+-------------+------+-----+---------+-------+
| Field      | Type        | Null | Key | Default | Extra |
+------------+-------------+------+-----+---------+-------+
| emp_id     | int         | NO   | PRI | NULL    |       |
| emp_name   | varchar(30) | YES  |     | NULL    |       |
| emp_salary | int         | YES  |     | NULL    |       |
| emp_city   | varchar(30) | YES  |     | NULL    |       |
+------------+-------------+------+-----+---------+-------+
4 rows in set (0.00 sec)

mysql> insert into employee
    -> values
    -> (1, 'Joey', 45000, 'New Jersey'),
    -> (2, 'Danial', 50000, 'Los Santos'),
    -> (3, 'Peter', 43000, 'New York'),
    -> (4, 'Quagmire', 52000, 'New York'),
    -> (5, 'Cleaveland', 44000, 'Los Angelis');
Query OK, 5 rows affected (0.01 sec)
Records: 5  Duplicates: 0  Warnings: 0

mysql> select * from employee;
+--------+-----------+------------+-------------+
| emp_id | emp_name  | emp_salary | emp_city    |
+--------+-----------+------------+-------------+
|      1 | Joey      |      45000 | New Jersey  |
|      2 | Danial    |      50000 | Los Santos  |
|      3 | Peter     |      43000 | New York    |
|      4 | Quagmire  |      52000 | New York    |
|      5 | Cleaveland|      44000 | Los Angelis |
+--------+-----------+------------+-------------+
5 rows in set (0.00 sec)

mysql> create table department
    -> (dept_id int primary key,
```

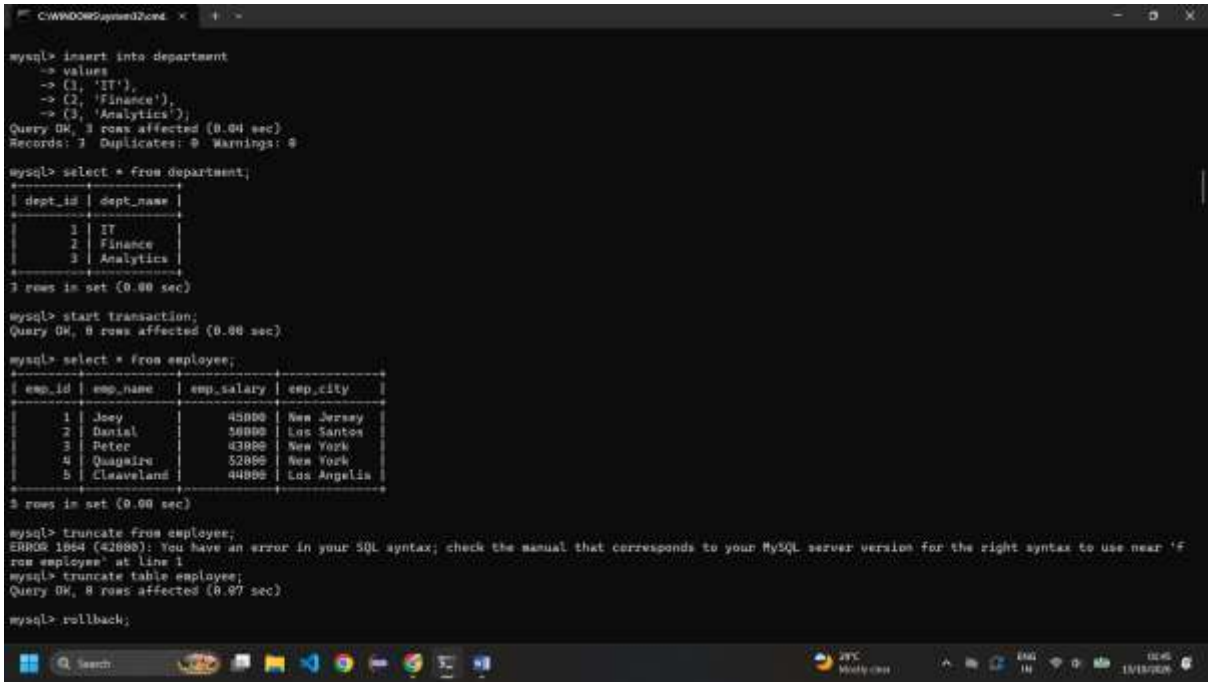

```
mysql> insert into department
    -> values
    -> (1, 'IT'),
    -> (2, 'Finance'),
    -> (3, 'Analytics');
Query OK, 3 rows affected (0.04 sec)
Records: 3  Duplicates: 0  Warnings: 0


mysql> select * from department;
+---------+-----------+
| dept_id | dept_name |
+---------+-----------+
|       1 | IT        |
|       2 | Finance   |
|       3 | Analytics |
+---------+-----------+
3 rows in set (0.00 sec)

mysql> start transaction;
Query OK, 0 rows affected (0.00 sec)

mysql> select * from employee;
+--------+-----------+------------+-------------+
| emp_id | emp_name  | emp_salary | emp_city    |
+--------+-----------+------------+-------------+
|      1 | Joey      |      45000 | New Jersey  |
|      2 | Danial    |      50000 | Los Santos  |
|      3 | Peter     |      43000 | New York    |
|      4 | Quagmire  |      52000 | New York    |
|      5 | Cleaveland|      44000 | Los Angelis |
+--------+-----------+------------+-------------+
5 rows in set (0.00 sec)

mysql> truncate from employee;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'f
rom employee' at line 1
mysql> truncate table employee;
Query OK, 0 rows affected (0.07 sec)

mysql> rollback;
```

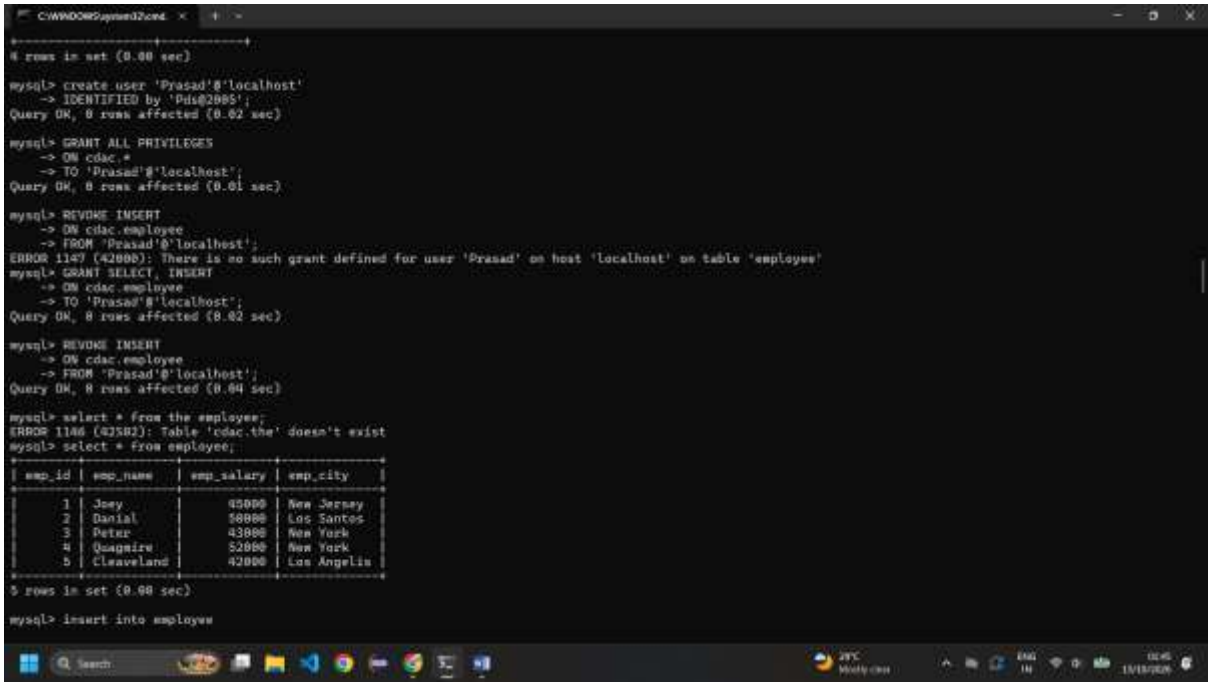

```
+--------------------+-----------+
4 rows in set (0.00 sec)

mysql> create user 'Prasad'@'localhost'
    -> IDENTIFIED by 'Pds@2005';
Query OK, 0 rows affected (0.02 sec)


mysql> GRANT ALL PRIVILEGES
    -> ON cdac.*
    -> TO 'Prasad'@'localhost';
Query OK, 0 rows affected (0.01 sec)

mysql> REVOKE INSERT
    -> ON cdac.employee
    -> FROM 'Prasad'@'localhost';
ERROR 1147 (42000): There is no such grant defined for user 'Prasad' on host 'localhost' on table 'employee'
mysql> GRANT SELECT, INSERT
    -> ON cdac.employee
    -> TO 'Prasad'@'localhost';
Query OK, 0 rows affected (0.02 sec)

mysql> REVOKE INSERT
    -> ON cdac.employee
    -> FROM 'Prasad'@'localhost';
Query OK, 0 rows affected (0.04 sec)

mysql> select * from the employee;
ERROR 1146 (42S02): Table 'cdac.the' doesn't exist
mysql> select * from employee;
+--------+-----------+------------+-------------+
| emp_id | emp_name  | emp_salary | emp_city    |
+--------+-----------+------------+-------------+
|      1 | Joey      |      45000 | New Jersey  |
|      2 | Danial    |      50000 | Los Santos  |
|      3 | Peter     |      43000 | New York    |
|      4 | Quagmire  |      52000 | New York    |
|      5 | Cleaveland|      42000 | Los Angelis |
+--------+-----------+------------+-------------+
5 rows in set (0.00 sec)

mysql> insert into employee
```

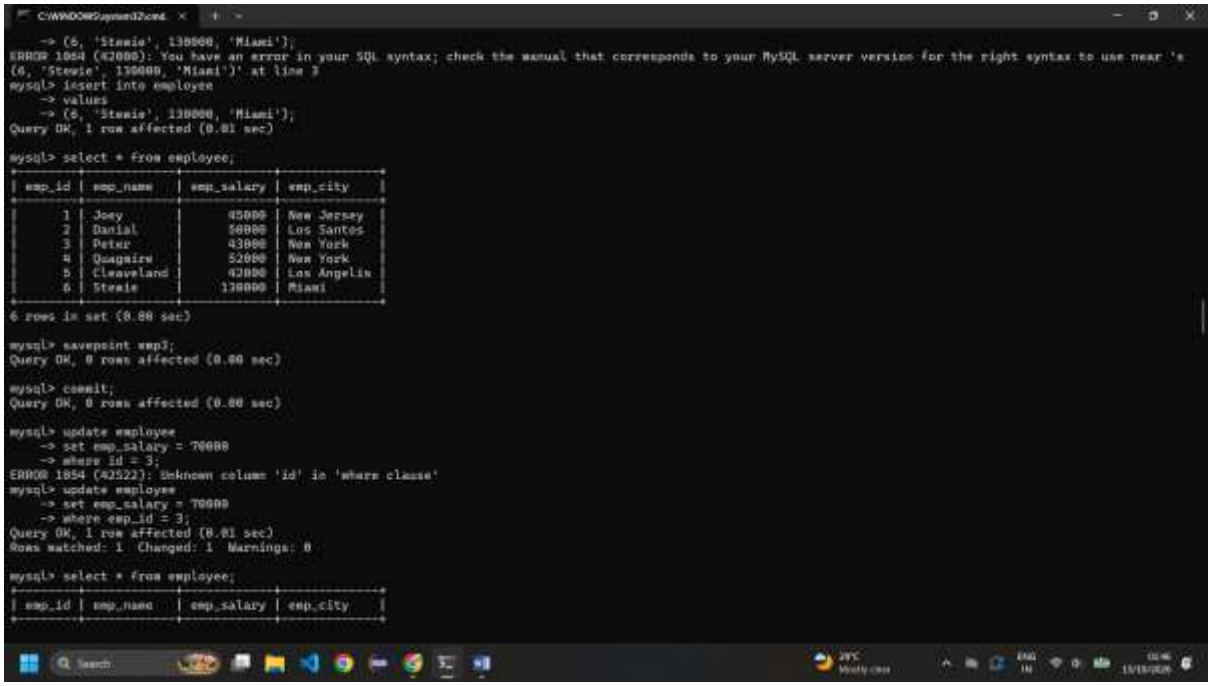

```
    -> (6, 'Stewie', 130000, 'Miami');
ERROR 1054 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 's
(6, 'Stewie', 130000, 'Miami')' at line 3
mysql> insert into employee
    -> values
    -> (6, 'Stewie', 130000, 'Miami');
Query OK, 1 row affected (0.01 sec)


mysql> select * from employee;
+--------+-----------+------------+-----------+
| emp_id | emp_name  | emp_salary | emp_city  |
+--------+-----------+------------+-----------+
|      1 | Joey      |      45000 | New Jersey |
|      2 | Danial    |      50000 | Los Santos |
|      3 | Peter     |      43000 | New York  |
|      4 | Quagmire  |      52000 | New York  |
|      5 | Cleaveland |     42000 | Los Angelis |
|      6 | Stewie    |     130000 | Miami     |
+--------+-----------+------------+-----------+
6 rows in set (0.00 sec)

mysql> savepoint emp3;
Query OK, 0 rows affected (0.00 sec)

mysql> commit;
Query OK, 0 rows affected (0.00 sec)

mysql> update employee
    -> set emp_salary = 70000
    -> where id = 3;
ERROR 1054 (42S22): Unknown column 'id' in 'where clause'
mysql> update employee
    -> set emp_salary = 70000
    -> where emp_id = 3;
Query OK, 1 row affected (0.01 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> select * from employee;
+--------+-----------+------------+-----------+
| emp_id | emp_name  | emp_salary | emp_city  |
+--------+-----------+------------+-----------+
```

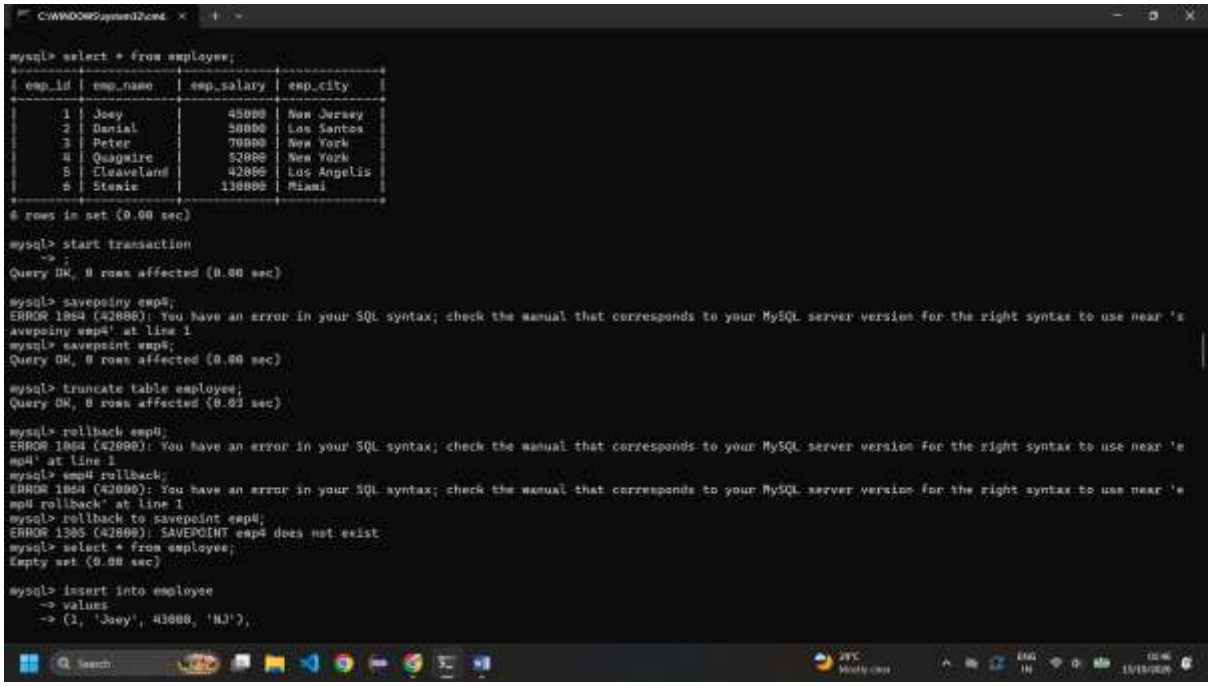

```
mysql> select * from employee;
+--------+-----------+------------+-----------+
| emp_id | emp_name  | emp_salary | emp_city  |
+--------+-----------+------------+-----------+
|      1 | Joey      |      45000 | New Jersey |
|      2 | Danial    |      50000 | Los Santos |
|      3 | Peter     |      70000 | New York  |
|      4 | Quagmire  |      52000 | New York  |
|      5 | Cleaveland |     42000 | Los Angelis |
|      6 | Stewie    |     130000 | Miami     |
+--------+-----------+------------+-----------+
6 rows in set (0.00 sec)


mysql> start transaction
    -> ;
Query OK, 0 rows affected (0.00 sec)

mysql> savepoiny emp4;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 's
avepoiny emp4' at line 1
mysql> savepoint emp4;
Query OK, 0 rows affected (0.00 sec)

mysql> truncate table employee;
Query OK, 0 rows affected (0.03 sec)

mysql> rollback emp4;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'e
mp4' at line 1
mysql> emp4 rollback;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'e
mp4 rollback' at line 1
mysql> rollback to savepoint emp4;
ERROR 1305 (42000): SAVEPOINT emp4 does not exist
mysql> select * from employee;
Empty set (0.00 sec)

mysql> insert into employee
    -> values
    -> (1, 'Joey', 43000, 'NJ'),
```

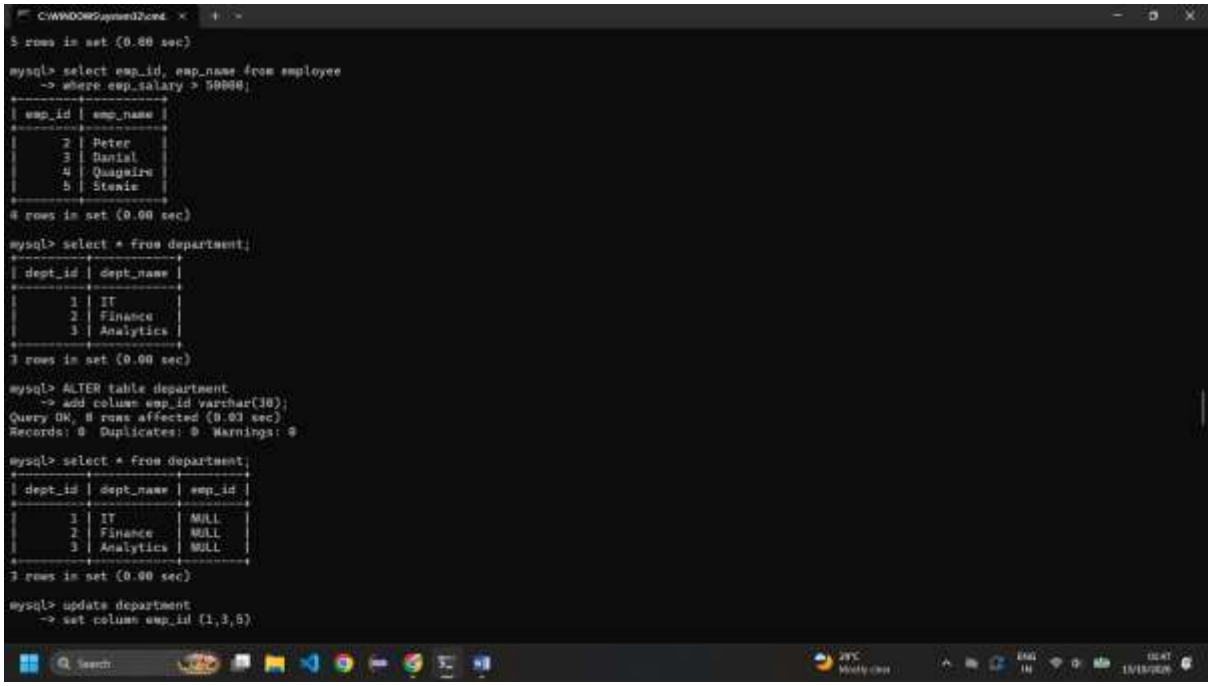

```
5 rows in set (0.00 sec)


mysql> select emp_id, emp_name from employee
    -> where emp_salary > 50000;
+--------+----------+
| emp_id | emp_name |
+--------+----------+
|      2 | Peter    |
|      3 | Danial   |
|      4 | Quagmire |
|      5 | Stewie   |
+--------+----------+
4 rows in set (0.00 sec)

mysql> select * from department;
+---------+-----------+
| dept_id | dept_name |
+---------+-----------+
|       1 | IT        |
|       2 | Finance   |
|       3 | Analytics |
+---------+-----------+
3 rows in set (0.00 sec)

mysql> ALTER table department
    -> add column emp_id varchar(30);
Query OK, 0 rows affected (0.03 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> select * from department;
+---------+-----------+--------+
| dept_id | dept_name | emp_id |
+---------+-----------+--------+
|       1 | IT        | NULL   |
|       2 | Finance   | NULL   |
|       3 | Analytics | NULL   |
+---------+-----------+--------+
3 rows in set (0.00 sec)


mysql> update department
    -> set column emp_id (1,3,5)
```

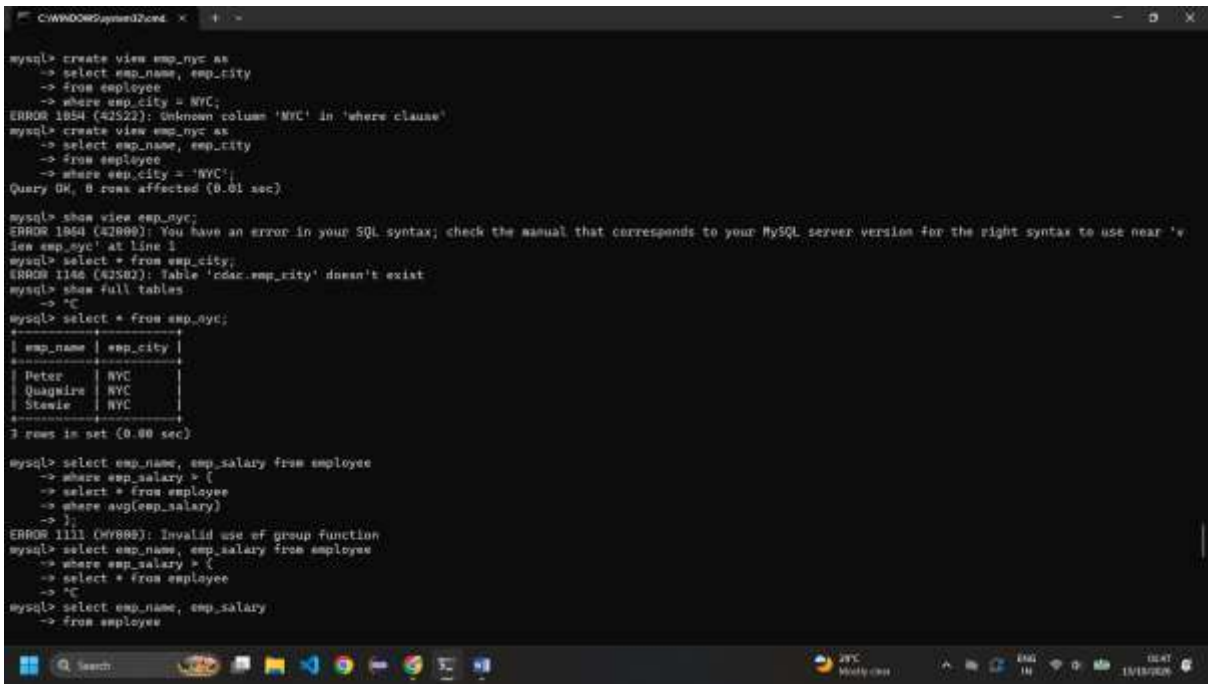

```
mysql> create view emp_nyc as
    -> select emp_name, emp_city
    -> from employee
    -> where emp_city = NYC;
ERROR 1054 (42S22): Unknown column 'NYC' in 'where clause'
mysql> create view emp_nyc as
    -> select emp_name, emp_city
    -> from employee
    -> where emp_city = 'NYC';
Query OK, 0 rows affected (0.01 sec)

mysql> show view emp_nyc;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'v
iew emp_nyc' at line 1
mysql> select * from emp_city;
ERROR 1146 (42S02): Table 'cdac.emp_city' doesn't exist
mysql> show full tables
    -> ^C
mysql> select * from emp_nyc;
+----------+----------+
| emp_name | emp_city |
+----------+----------+
| Peter    | NYC      |
| Quagmire | NYC      |
| Stewie   | NYC      |
+----------+----------+
3 rows in set (0.00 sec)

mysql> select emp_name, emp_salary from employee
    -> where emp_salary > (
    -> select * from employee
    -> where avg(emp_salary)
    -> );
ERROR 1111 (HY000): Invalid use of group function
mysql> select emp_name, emp_salary from employee
    -> where emp_salary > (
    -> select * from employee
    -> ^C
mysql> select emp_name, emp_salary
    -> from employee
```

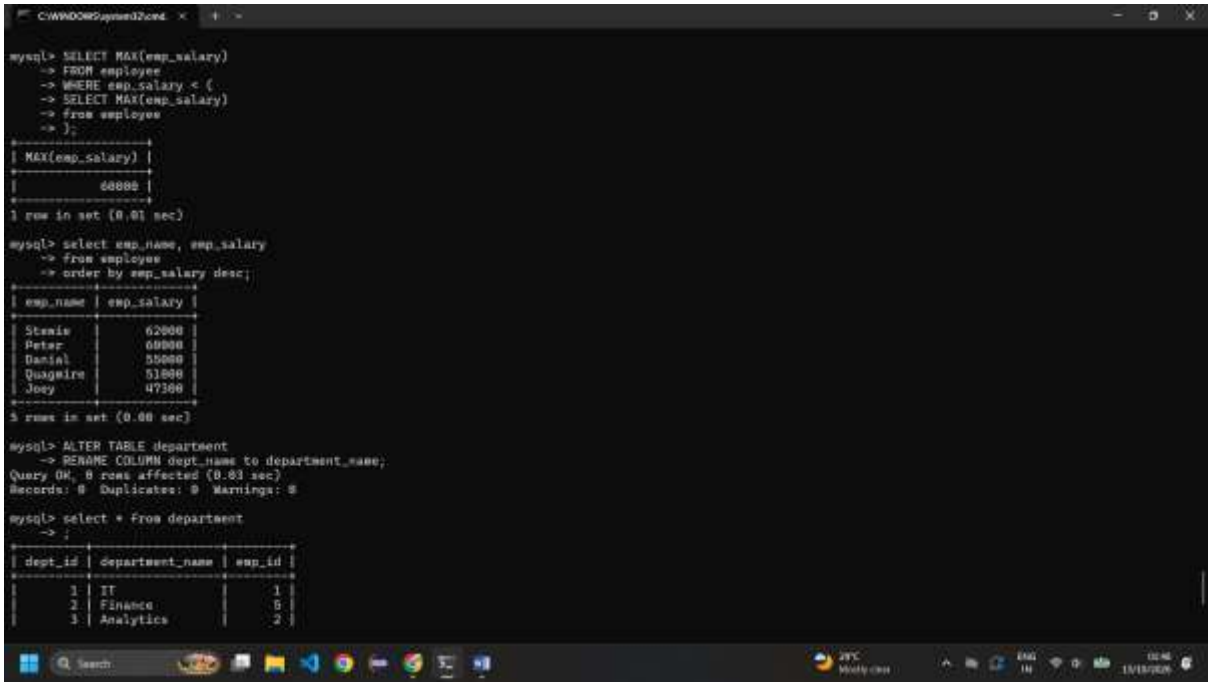
C:\WINDOWS\system32\cmd.exe
mysql> SELECT MAX(emp_salary)
-> FROM employee
-> WHERE emp_salary < (
-> SELECT MAX(emp_salary)
-> from employee
->);
+------------------+
| MAX(emp_salary) |
+------------------+
| 60000 |
+------------------+
1 row in set (0.01 sec)
mysql> select emp_name, emp_salary
-> from employee
-> order by emp_salary desc;
+----------+------------+
| emp_name | emp_salary |
+----------+------------+
Stevie	62000
Peter	60000
Danial	55000
Quagmire	51000
Joey	47300
+----------+------------+
5 rows in set (0.00 sec)
mysql> ALTER TABLE department
-> RENAME COLUMN dept_name to department_name;
Query OK, 0 rows affected (0.03 sec)
Records: 0 Duplicates: 0 Warnings: 0
mysql> select * from department
-> ;
+---------+-----------------+--------+
| dept_id | department_name | emp_id |
+---------+-----------------+--------+
1	IT	1
2	Finance	5
3	Analytics	2