Maven – (Project Build Tool)

WebDriverManager – 4.4.1

Selenium java – 4.2.0

Common.io - 2.4

Maven having some folder structure

Maven Folder Structure:

1. src/main/java
2. src/main/resources
3. src/test/java
4. src/test/resources
5. JRE System library
6. Maven Dependencies
7. src
8. target
9. pom.xml –(Project Object Model)

Junit - framework tool which is under TDD framework

All methods should be public

Junit – 5.3.0

Selenium java – 4.2.0

Common.io - 2.4

@beforeclass – public & static

@before

@test

@after

@afterclass – public & static

@ignore

Suite level execution possible

@Runwith(Suite.class)

@Suiteclasses({ })

We can verify business logic

assertTrue()

assertEquals()

Data Driven

poi-ooxml - 3.8

Workbook w = new HSSFWorkbook – xls /XSSFWorkbook() – xlsx

Sheet s =w. getSheet(" sheet ")

Row r = s.getRow(1)

getPhysicalNumberOfRows

Cell c = r.getCell(2)

getPhysicalNumberOfCells

TestNG (advance version of Junit)

Testing – 6.14.3
Jcommander – 1.27
commons-io - 2.4

1.Automatically it's generate HTML report

2.run multiple time particular test case

2.parallel test/metho/class execution possible

4.we can pass data from parameters

5.Dataprovider - pass bulk of data

6.rerun the failure test case

7.we can grouping the testcases <include

8.we can verify the business logic

9.cross browsers testing is possible

Annotations

- @beforesuite
- @befortest
- @beforeclass
- @before
- @test - priority / invocationCount / enabled = false /groups
- @after
- @afterclass
- @aftertest
- @aftersuite
- @dataprovider(name="curry")
- @parameters

Failed test case

With help of Listeners tag in TestNG.xml

Implements IAnatationTramsformer and Iretryanalizer in sperate class

Iretryanalizer - give test case run count

IAnatationTramsformer -get & set RetryAnalaizer

Grouping - <Include / exclude Tag

```
<groups>
<run>
<Include / exclude Tag  name="   "/>
</run>
</groups>
```

Cucumber

- It's an BDD FrameWork,which will execute in Simple English
- Non technical person also can understand tha cucumber

@Runwith

@CucumberOptions

Features - fut file location

Glue - step definition class loc

dryRun - generate missed snippet

Plugin - generate report (Junit:*xml path*, Json:*json path*,HTML:*report folder path*Pretty ,rerun)

Monochrome - print understand language in console

Snippets - can modify camel and underscore model

Tags - for Grouping purpose

Hooks class (---- import from Cucumber-----)

@after

@before

JVM reporting

© ----- configuration (file path reference, message)

.addClassification (“Window” ,”11”)

© -------ReportBuilder (json list format, configuration)

.generateReports()

Properties file :

File f = new File(*Properties file path*)

Property – c

Load(FileinputSteram(f))

getProperties(username)

Rerun (separate class)

@Runwith

@CucumberOptions(features=@path of failure file ,glue=step.package)

Cucumber Structure
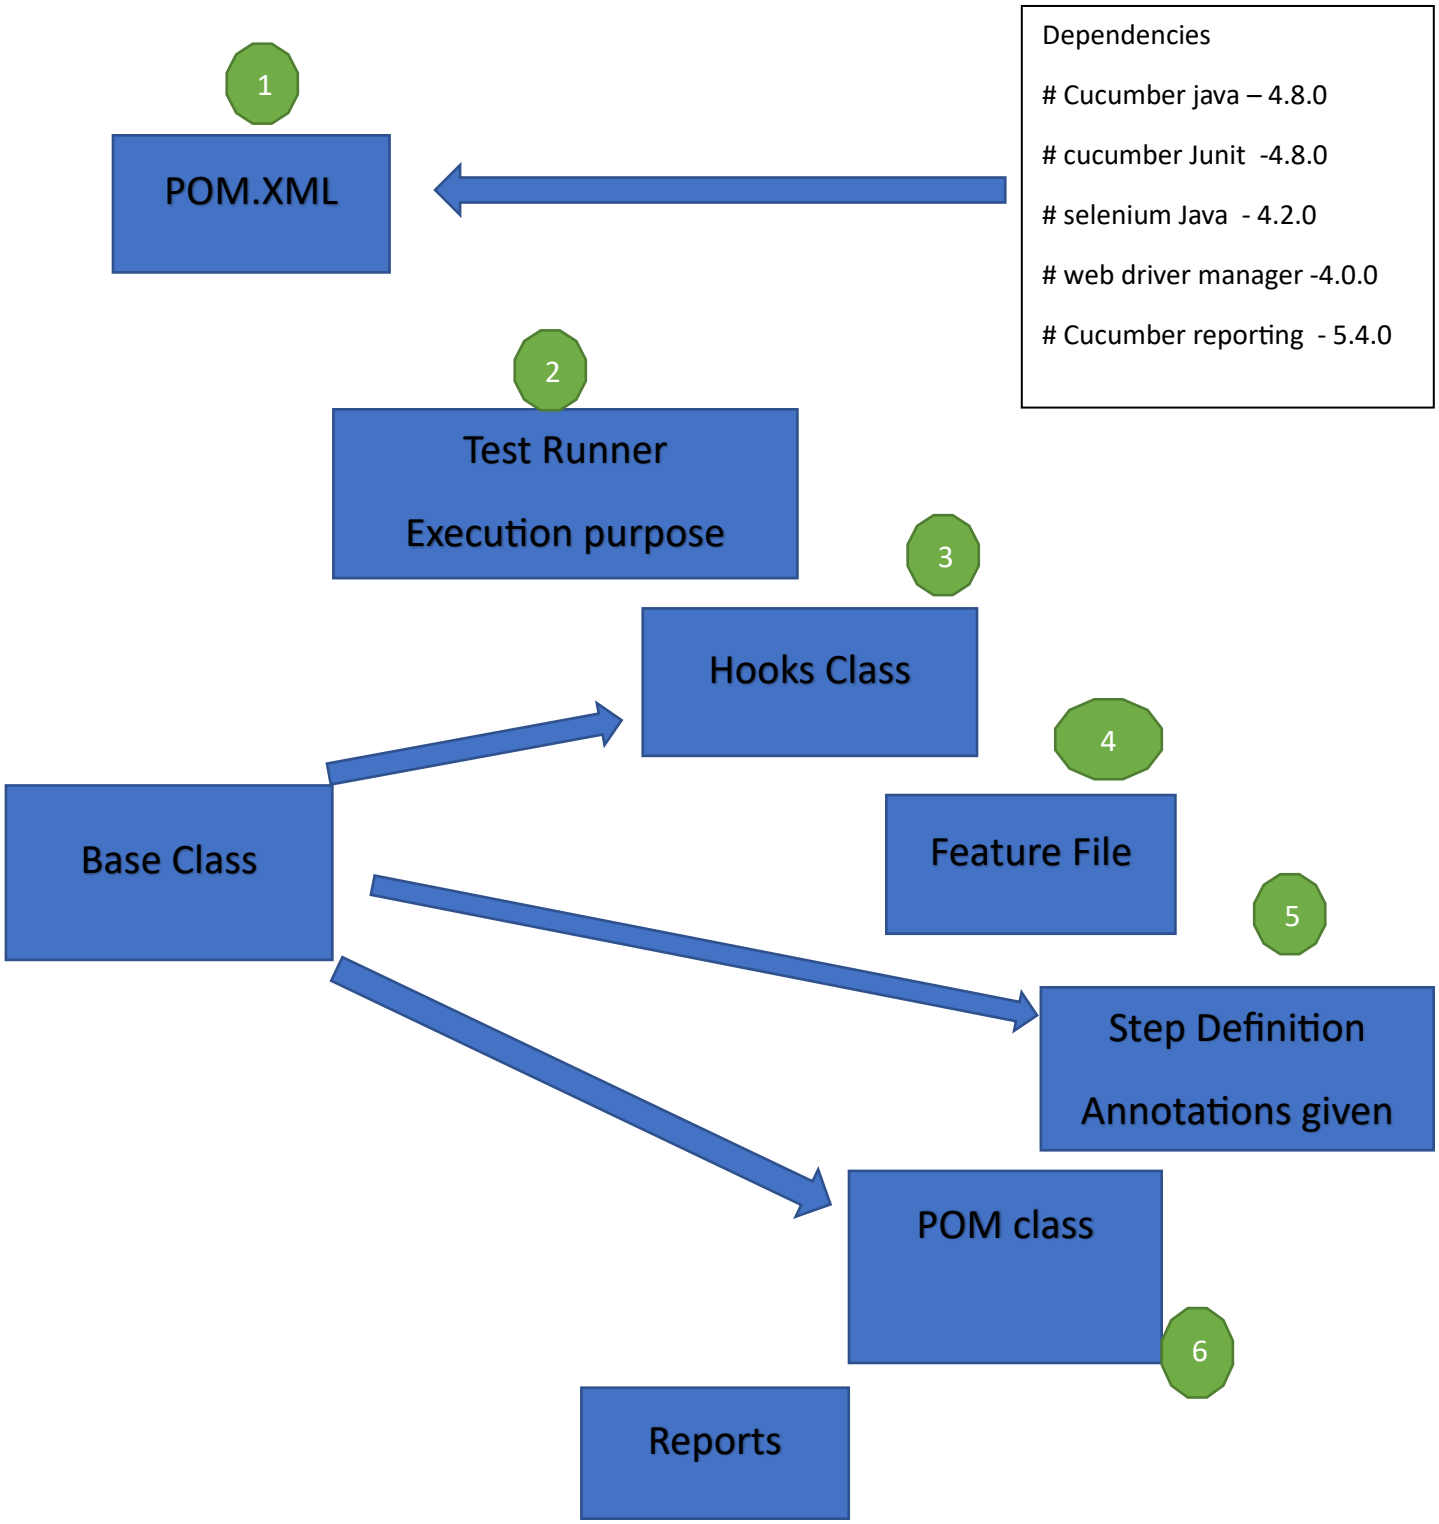
In my project we are using maven as a Software Build Tool.