

Name: Prashanth Raghavendra Rao

Task: Jenkins 1

Date: 12/07/2025

Task Description:

1. Launch jenkins and explore creating projects and users.
2. Create a simple script file and push it to repo. Create a project in Jenkins connected to your GitHub repository. When a commit is made to your repo, automatically build must get triggered from Jenkins and the output must be shared to me via email.

The screenshot displays the AWS Management Console interface for launching an EC2 instance. The 'Launch an instance' page is active, showing the 'Name and tags' section with the name 'jenkins-prash'. The 'Application and OS Images (Amazon Machine Image)' section is expanded, showing a search bar and a grid of OS options including Ubuntu, Windows, Red Hat, SUSE Linux, and Debian. The 'Ubuntu Server 24.04 LTS (HVM), SSD Volume Type' AMI is selected. The 'Instance type' section shows 't2.micro' selected. The 'Summary' panel on the right shows 'Number of instances: 1', 'Software Image (AMI): Canonical, Ubuntu, 24.04, amd64...', 'Virtual server type (instance type): t2.micro', 'Firewall (security group): New security group', and 'Storage (volumes): 1 volume(s) - 8 GB'. A 'Free tier' notification is also visible.

aws

Search

[Option+S]

Asia Pacific (Mumbai)

Prashanth @ 2553-9188-9675

EC2 > Instances > Launch an instance

Subnet

No preference (Default subnet in any availability zone)

Auto-assign public IP

Enable

Additional charges apply when outside of free tier allowance

Firewall (security groups)

A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

Create security group

Select existing security group

We'll create a new security group called 'launch-wizard-1' with the following rules:

☒ Allow SSH traffic from

Helps you connect to your instance

Anywhere

0.0.0.0/0

☐ Allow HTTPS traffic from the internet

To set up an endpoint, for example when creating a web server

☐ Allow HTTP traffic from the internet

To set up an endpoint, for example when creating a web server

Rules with source of 0.0.0.0/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Configure storage

Advanced

1x 8 GiB gp3 Root volume, 3000 IOPS, Not encrypted

Free tier eligible customers can get up to 30 GiB of EBS General Purpose (SSD) or Magnetic storage

Add new volume

The selected AMI contains instance store volumes, however the instance does not allow any instance store volumes. None of the instance store volumes from the AMI will be accessible from the instance

Click refresh to view backup information

The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

0 x File systems

Advanced details

Summary

Number of instances

1

Software Image (AMI)

Canonical, Ubuntu, 24.04, amd64...read more

ami-09f876c7a332390

Virtual server type (instance type)

t2.micro

Firewall (security group)

New security group

Storage (volumes)

1 volume(s) - 8 GiB

Free tier: In your first year of opening an AWS account, you get 750 hours per month of t2.micro instance usage (or t3.micro where t2.micro isn't available) when used with free tier AMIs, 750 hours per month of public IPv4 address usage, 30 GiB of EBS storage, 2 million I/Os, 1 GiB of snapshots, and 100 GiB of bandwidth to the Internet.

Cancel

Launch instance

Preview code

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws

Search

[Option+S]

Asia Pacific (Mumbai)

Prashanth @ 2553-9188-9675

EC2 > Security Groups > sg-02e4849ea5756f088 - launch-wizard-1 > Edit inbound rules

Edit inbound rules

Inbound rules control the incoming traffic that's allowed to reach the instance.

Inbound rules

Security group rule ID

sg-0c3d59ec8ff6afa

Type

SSH

Protocol

TCP

Port range

22

Source

Custom

Description - optional

0.0.0.0/0

Delete

-

HTTP

TCP

80

Anywhere...

0.0.0.0/0

Delete

-

Custom TCP

TCP

8080

Anywhere...

0.0.0.0/0

Delete

Add rule

Rules with source of 0.0.0.0/0 or :::0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Cancel

Preview changes

Save rules

EC2

Dashboard

EC2 Global View

Events

Instances

Instances Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

Images

AMIs

AMI Catalog

Elastic Block Store

Volumes

Snapshots

Lifecycle Manager

Network & Security

Security Groups

Elastic IPs

Placement Groups

Key Pairs

Network Interfaces

Load Balancing

Load Balancers

Target Groups

Trust Stores

Auto Scaling

Auto Scaling Groups

Settings

Instance summary for i-06accd1b76b6b285e (jenkins-prash)

Updated less than a minute ago

Instance ID

i-06accd1b76b6b285e

IPv6 address

–

Hostname type

IP name: ip-172-31-9-177.ap-south-1.compute.internal

Answer private resource DNS name

IPv4 (A)

Auto-assigned IP address

3.109.58.221 [Public IP]

IAM Role

–

IMDSv2

Required

Operator

–

Public IPv4 address

3.109.58.221 [open address]

Instance state

Running

Private IP DNS name (IPv4 only)

ip-172-31-9-177.ap-south-1.compute.internal

Instance type

t2.micro

VPC ID

vpc-032038c199af20b71

Subnet ID

subnet-0f24967078b8af115

Instance ARN

arn:aws:ec2:ap-south-1:235391889675:instance/i-06accd1b76b6b285e

Private IPv4 addresses

172.31.9.177

Public DNS

ec2-3-109-58-221.ap-south-1.compute.amazonaws.com [open address]

Elastic IP addresses

–

AWS Compute Optimizer finding

Opt-in to AWS Compute Optimizer for recommendations. | Learn more

Auto Scaling Group name

–

Managed

false

Details

Status and alarms

Monitoring

Security

Networking

Storage

Tags

▼ Security details

IAM Role

–

Owner ID

235391889675

Launch time

Sun Jul 13 2025 22:41:06 GMT+05:30 (India Standard Time)

Security groups

sg-02e4849ea5756f088 [launch-wizard-1]

▼ Inbound rules

Filter rules

Name	Security group rule ID	Port range	Protocol	Source	Security groups	Description
–	sg-0670a2021e286d19a	80	TCP	0.0.0.0/0	launch-wizard-1	–
–	sg-0cc3d59ec8f6c6afa	22	TCP	0.0.0.0/0	launch-wizard-1	–
–	sg-0d511d34795f22bce	8080	TCP	0.0.0.0/0	launch-wizard-1	–

▼ Outbound rules

Filter rules

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

```
Setting up ubuntu-mono (24.04-ubuntu1) ...
Processing triggers for man-db (2.12.0-4build2) ...
Processing triggers for libc-bin (2.39-0ubuntu8.4) ...
Processing triggers for ca-certificates-java (20240118) ...
done.
Setting up openjdk-17-jdk-headless:amd64 (17.0.15+6-us1-0ubuntu124.04) ...
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jar to provide /usr/bin/jar (jar) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jarsigner to provide /usr/bin/jarsigner (jarsigner) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/javac to provide /usr/bin/javac (javac) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/javadoc to provide /usr/bin/javadoc (javadoc) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/javap to provide /usr/bin/javap (javap) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jcmd to provide /usr/bin/jcmd (jcmd) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jdb to provide /usr/bin/jdb (jdb) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jdeprscan to provide /usr/bin/jdeprscan (jdeprscan) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jdeps to provide /usr/bin/jdeps (jdeps) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jfr to provide /usr/bin/jfr (jfr) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jimage to provide /usr/bin/jimage (jimage) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jinfo to provide /usr/bin/jinfo (jinfo) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jlink to provide /usr/bin/jlink (jlink) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jmap to provide /usr/bin/jmap (jmap) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jmod to provide /usr/bin/jmod (jmod) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jps to provide /usr/bin/jps (jps) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jrunscript to provide /usr/bin/jrunscript (jrunscript) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jshell to provide /usr/bin/jshell (jshell) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jstack to provide /usr/bin/jstack (jstack) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jstat to provide /usr/bin/jstat (jstat) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jstatd to provide /usr/bin/jstatd (jstatd) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/serialver to provide /usr/bin/serialver (serialver) in auto mode
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/shadw to provide /usr/bin/shadw (shadw) in auto mode
Setting up openjdk-17-jre:amd64 (17.0.15+6-us1-0ubuntu124.04) ...
Setting up openjdk-17-jdk:amd64 (17.0.15+6-us1-0ubuntu124.04) ...
update-alternatives: using /usr/lib/jvm/java-17-openjdk-amd64/bin/jconsole to provide /usr/bin/jconsole (jconsole) in auto mode
Processing triggers for libgdk-pixbuf-2.0-0:amd64 (2.42.10+dfsg-3ubuntu1.1) ...
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-9-177:~$ java -version
openjdk version "17.0.15" 2025-04-15
openJDK Runtime Environment (build 17.0.15+6-Ubuntu-0ubuntu124.04)
openJDK 64-bit Server VM (build 17.0.15+6-Ubuntu-0ubuntu124.04, mixed mode, sharing)
ubuntu@ip-172-31-9-177:~$ curl -fsSL https://pkg.jenkins.io/debian/jenkins.io-2023.key | sudo tee \
  /usr/share/keyrings/jenkins-keyring.asc > /dev/null
ubuntu@ip-172-31-9-177:~$ echo 'deb [signed-by=/usr/share/keyrings/jenkins-keyring.asc] \
  https://pkg.jenkins.io/debian binary/' | sudo tee \
  /etc/apt/sources.list.d/jenkins.list > /dev/null
ubuntu@ip-172-31-9-177:~$
```

i-06accd1b76b6b285e (jenkins-prash)

Public IP: 3.109.58.221 Private IP: 172.31.9.177

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

```
Scanning linux images...
Pending kernel upgrade!
Running kernel version:
  6.8.0-1029-aws
Diagnostics:
  The currently running kernel version is not the expected kernel version 6.8.0-1031-aws.

Restarting the system to load the new kernel will not be handled automatically, so you should consider rebooting.

Restarting services...

Service restarts being deferred:
systemctl restart getty@tty1.service
systemctl restart networkd-dispatcher.service
systemctl restart serial-getty@ttyS0.service
systemctl restart systemd-logind.service
systemctl restart unattended-upgrades.service

No containers need to be restarted.

Near sessions running outdated binaries:
ubuntu @ session #1: sshd[1006]
ubuntu @ user manager service: systemd[1385]
ubuntu@ip-172-31-4-104:~$ sudo systemctl start jenkins
ubuntu@ip-172-31-4-104:~$ sudo systemctl enable jenkins
Failed to enable unit: Unit file jenkins.service does not exist.
ubuntu@ip-172-31-4-104:~$ sudo systemctl start jenkins
ubuntu@ip-172-31-4-104:~$ sudo systemctl enable jenkins
Synchronizing state of jenkins.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable jenkins
ubuntu@ip-172-31-4-104:~$ sudo systemctl status jenkins
Unit jenkins.service could not be found.
ubuntu@ip-172-31-4-104:~$ sudo systemctl status jenkins
jenkins.service - Jenkins Continuous Integration Server
   Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: enabled)
   Active: active (running) since Sun 2025-07-13 19:14:55 UTC; 1min 21s ago
   Main PID: 14701 (java)
   Tasks: 38 (limit: 1124)
   Memory: 298.4M (peak: 325.3M)
   CPU: 18.066s
   CGroup: /system.slice/jenkins.service
           └─14701 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080

Jul 13 19:14:46 ip-172-31-4-104 jenkins[14701]: 64f16466020486a93b4e1a7d09f3b3
Jul 13 19:14:46 ip-172-31-4-104 jenkins[14701]: This may also be found at: /var/lib/jenkins/secrets/initialAdminPassword
Jul 13 19:14:46 ip-172-31-4-104 jenkins[14701]: *****
Jul 13 19:14:46 ip-172-31-4-104 jenkins[14701]: *****
Jul 13 19:14:46 ip-172-31-4-104 jenkins[14701]: *****
Jul 13 19:14:55 ip-172-31-4-104 jenkins[14701]: 2025-07-13 19:14:55.508+0000 [id=30] INFO Jenkins.InitReactorRunner$1#onAttained: Completed initialization
Jul 13 19:14:55 ip-172-31-4-104 jenkins[14701]: 2025-07-13 19:14:55.543+0000 [id=23] INFO Hudson.lifecycle.Lifecycle#onReady: Jenkins is fully up and running
Jul 13 19:14:55 ip-172-31-4-104 systemd[1]: Started jenkins.service - Jenkins Continuous Integration Server.
Jul 13 19:14:57 ip-172-31-4-104 jenkins[14701]: 2025-07-13 19:14:57.196+0000 [id=47] INFO h.m.DownloadService$Downloadable#load: Obtained the updated data file for hudson.tasks.Maven.MavenInstaller
Jul 13 19:14:57 ip-172-31-4-104 jenkins[14701]: 2025-07-13 19:14:57.199+0000 [id=47] INFO Hudson.util.Retrier#start: Performed the action check updates server successfully at the attempt #1
ubuntu@ip-172-31-4-104:~$
```

i-013915430561fa42c (jenkins-prash) ✕
PublicIP: 13.201.102.98 PrivateIP: 172.31.4.104

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Getting Started

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:

`/var/lib/jenkins/secrets/initialAdminPassword`

Please copy the password from either location and paste it below.

Administrator password

Continue

Getting Started

Create First Admin User

Username

Prashanth

Password

.....

Confirm password

.....

Full name

Prashanth R

E-mail address

Jenkins 2.518

Skip and continue as admin

Save and Continue

 Jenkins

+ New Item

 Build History

Build Queue

No builds in the queue.

Build Executor Status

0/2

REST API

Jenkins 2.518

Welcome to Jenkins!

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Start building your software project

Create a job

Set up a distributed build

Set up an agent

Configure a cloud

Learn more about distributed builds

Add description

 Jenkins

Manage Jenkins / Plugins

Search

Settings

User

Plugins

Search GitHub

Updates

Available plugins

Installed plugins

Advanced settings

Download progress

Name ↓	Health	Enabled	
GitHub API Plugin 1.321-488.v9b_c0da_9533f8 This plugin provides GitHub API for other plugins. Report an issue with this plugin	99	☒	☐
GitHub Branch Source Plugin 1824.v046257273408 Multibranch projects and organization folders from GitHub. Maintained by CloudBees, Inc. Report an issue with this plugin	99	☒	☐
GitHub Integration Plugin 0.7.2 GitHub Integration Plugin for Jenkins	87	☒	☐
GitHub Organization Folder Plugin 1.6 The functionality that was provided by this plugin has been moved to the GitHub Branch Source plugin . You can safely delete this plugin once there are no plugins that depend on this plugin installed. Report an issue with this plugin This plugin is deprecated. In general, this means that it is either obsolete, no longer being developed, or may no longer work. Learn more.	56	☒	☐
GitHub plugin 1.43.0 This plugin integrates GitHub to Jenkins. Report an issue with this plugin Pipeline: GitHub Groovy Libraries 85.v203688e77777e	99	☒	☐

 Jenkins

New Item

Search

Settings

User

New Item

Enter an item name

Prash-Auto-Build

Select an item type

 **Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

 **Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suitable for building pipelines (formerly known as workflows) and/or organizing complex activities that do not easily fit in free-style job type.

 **Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

 **Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

 **Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCM repository.

OK

 Jenkins

Prash-Auto-Build / Configuration



Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

Advanced

Source Code Management

Connect and manage your code repository to automatically pull the latest code for your builds.

☐ None

☒ Git ?

Repositories ?

Repository URL ?

https://github.com/Prash099/Jenkins

Credentials ?

- none -

+ Add

Advanced

Add Repository

SaveApply

 Jenkins

Prash-Auto-Build / Configuration



Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

☐ Delete workspace before build starts

☐ Use secret text(s) or file(s) ?

☐ Add timestamps to the Console Output

☐ Inspect build log for published build scans

☐ Terminate a build if it's stuck

☐ With Ant ?

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

Execute shell ?

Command

See the list of available environment variables

#!/bin/bash
chmod +x build.sh
./build.sh

Advanced

Add build step

SaveApply

Prash099 / Jenkins

Type to search

Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

General

Access

Collaborators

Moderation options

Code and automation

Branches

Tags

Rules

Actions

Models

Webhooks

Copilot

Environments

Codespaces

Pages

Security

Advanced Security

Deploy keys

Secrets and variables

Webhooks / Add webhook

We'll send a POST request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, x-www-form-urlencoded, etc). More information can be found in [our developer documentation](#).

Payload URL *
http://13.201.102.98:8080/github-webhook/

Content type *
application/json

Secret

SSL verification
By default, we verify SSL certificates when delivering payloads.
☒ Enable SSL verification ☐ Disable (not recommended)

Which events would you like to trigger this webhook?
☒ Just the push event.
☐ Send me everything.
☐ Let me select individual events.

Jenkins / Manage Jenkins / System

Search

Settings

Profile

E-mail Notification

SMTP server
smtp.gmail.com

Default user e-mail suffix

Advanced Edited

☒ Use SMTP Authentication
User Name
prashanttech099@gmail.com
Password
.....

☒ Use SSL
☐ Use TLS

SMTP Port
465

Reply-To Address
prashanttech099@gmail.com

Charset
UTF-8

Save Apply

Jenkins

Manage Jenkins

System

triggg0/0

prasnantmtectnusa@gmail.com

Reply To List ?

Emergency reroute ?

Allowed Domains ?

Excluded Recipients ?

Default Subject ?

\$PROJECT_NAME - Build # \$BUILD_NUMBER - \$BUILD_STATUS!

Maximum Attachment Size ?

-1

Default Content ?

Build URL: \$(BUILD_URL)
Console Output: \$(BUILD_LOG)

Default Pre-send Script ?

Save

Apply

Jenkins

Manage Jenkins

System

Default Triggers ^

Default Triggers ?

☐ Aborted

☐ Always

☐ Before Build

☐ Failure - 1st

☐ Failure - 2nd

☒ Failure - Any

☐ Failure - Still

☐ Failure - X

☐ Failure -> Unstable (Test Failures)

☐ Fixed

☐ Not Built

☐ Script - After Build

☐ Script - Before Build

☐ Status Changed

☒ Success

☐ Test Improvement

☐ Test Regression

☐ Unstable (Test Failures)

☐ Unstable (Test Failures) - 1st

☐ Unstable (Test Failures) - Still

☐ Unstable (Test Failures)/Failure -> Success

Content Token Reference ?

E-mail Notification

Save

Apply

Prash099 / Jenkins

Q

Type ↵ to search

+

<>

Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

main

Jenkins / build.sh

Go to file

t

...

Prash099

Create build.sh

60daf67 · 19 minutes ago

History

Code

Blame

1 lines (1 loc) · 42 Bytes

Code 55% faster with GitHub Copilot

Download raw file

Raw

1

echo 'echo Hello from Prashanth Jenkins!'

Prash099 / Jenkins

Q

Type ↵ to search

+

<>

Code

Issues

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Jenkins /

build.sh

in main

Cancel changes

Commit changes...

Edit

Preview

Code 55% faster with GitHub Copilot

Spaces

2

No wrap

1

echo 'echo Hello from Prashanth R Jenkins!'

2

Use **Control + Shift + m** to toggle the **tab** key moving focus. Alternatively, use **esc** then **tab** to move to the next interactive element on the page.



Jenkins

Prash-Auto-Build

Search

Settings

Profile

Status

Changes

Workspace

Build Now

Configure

Delete Project

GitHub Hook Log

Rename

Prash-Auto-Build

Permalinks

Add description

Builds

Filter

Today

#3 7:39 PM

REST API

Jenkins 2.518



Jenkins

Prash-Auto-Build / #5

Search

Settings

Profile

Status

Changes

Console Output

Edit Build Information

Delete build #5

Timings

Git Build Data

Previous Build

#5 (Jul 13, 2025, 7:45:17 PM)

Add description

Keep this build forever

Started by user [Prashanth R](#)

This run spent:

- 5 ms waiting;
- 3.8 sec build duration;
- 3.8 sec total from scheduled to completion.

git

Revision: 69a2624c6eb17e75a3c17bde58953e9e9858098e

Repository: <https://github.com/Prash099/Jenkins>

refs/remotes/origin/main



No changes.

Started 8.9 sec ago

Took 3.8 sec

REST API

Jenkins 2.518

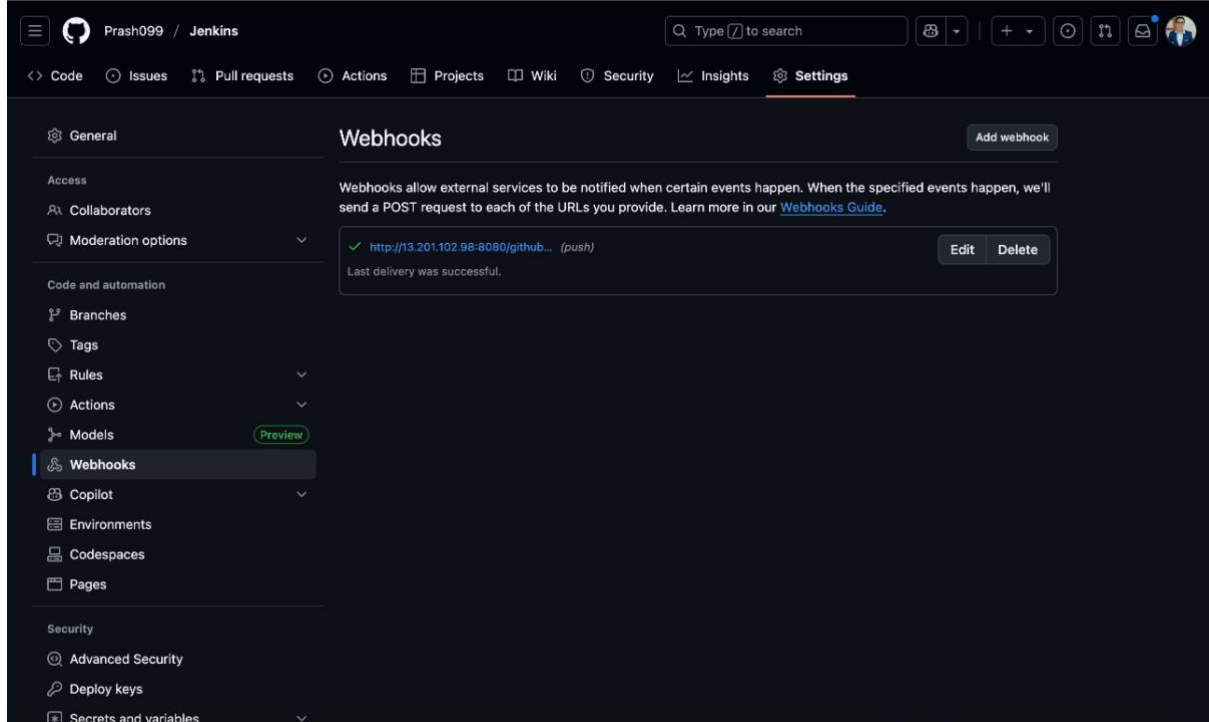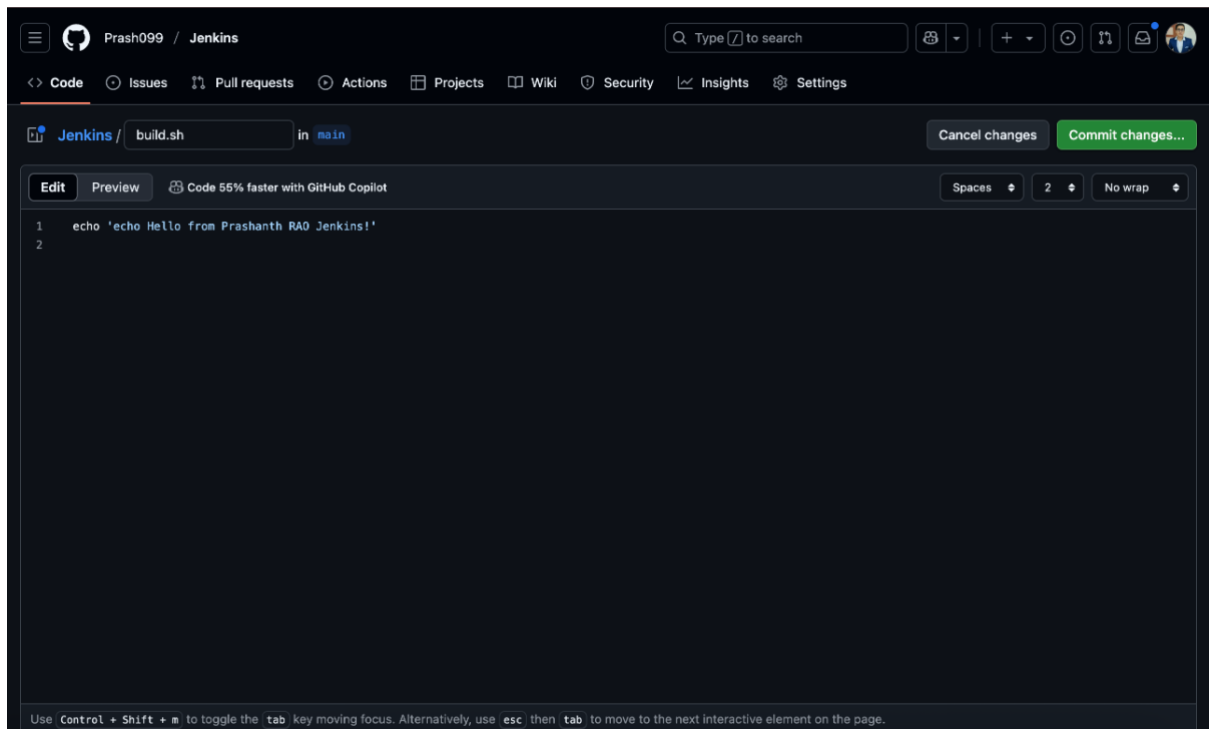



Jenkins

Prash-Auto-Build / #6

Search

Builds

Users

Status

Changes

Console Output

Edit Build Information

Delete build '#6'

Polling Log

Timings

Git Build Data

Previous Build

✓ #6 (Jul 13, 2025, 7:46:01 PM)

Add description

Keep this build forever

Started by GitHub push by Prash099

Started 7.3 sec ago
Took 0.99 sec

This run spent:

- 6.3 sec waiting;
- 0.99 sec build duration;
- 7.3 sec total from scheduled to completion.

git

Revision: d1e60b5fe72e91af8e88c3ebc60d728430c67722
Repository: <https://github.com/Prash099/Jenkins>
refs/remotes/origin/main

Changes

1. Update build.sh (details / githubweb)

REST API

Jenkins 2.518



Jenkins

Prash-Auto-Build / #6 / Console Output

Search

Builds

Users

Status

Changes

Console Output

Edit Build Information

Delete build '#6'

Polling Log

Timings

Git Build Data

Previous Build

✓ Console Output

Download

Copy

View as plain text

Started by GitHub push by Prash099

Running as SYSTEM

Building in workspace /var/lib/jenkins/workspace/Prash-Auto-Build

The recommended git tool is: NONE

using credential Git

> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/Prash-Auto-Build/.git # timeout=10

Fetching changes from the remote Git repository

> git config remote.origin.url <https://github.com/Prash099/Jenkins> # timeout=10

Fetching upstream changes from <https://github.com/Prash099/Jenkins>

> git --version # timeout=10

> git --version # 'git version 2.43.0'

using GIT_ASKPASS to set credentials GitHub PAT

> git fetch --tags --force --progress -- <https://github.com/Prash099/Jenkins> +refs/heads/*:refs/remotes/origin/* # timeout=10

> git rev-parse refs/remotes/origin/main^{commit} # timeout=10

Checking out Revision d1e60b5fe72e91af8e88c3ebc60d728430c67722 (refs/remotes/origin/main)

> git config core.sparsecheckout # timeout=10

> git checkout -f d1e60b5fe72e91af8e88c3ebc60d728430c67722 # timeout=10

Commit message: "Update build.sh"

> git rev-list --no-walk 69a2624c6eb17e75a3c17bde58953e969858098e # timeout=10

Prash-Auto-Build: Prashanth RAO Jenkins! 69a2624c6eb17e75a3c17bde58953e969858098e

echo Hello from Prashanth RAO Jenkins!

Finished: SUCCESS

REST API

Jenkins 2.518

Test email #3 » Inbox x



address not configured yet <prashanthtech099@gmail.com>
to me ▾

This is test email #3 sent from Jenkins

01:31 (0 minutes ago) ☆ 😊 ↶ ⋮



↶ Reply ↷ Forward 😊