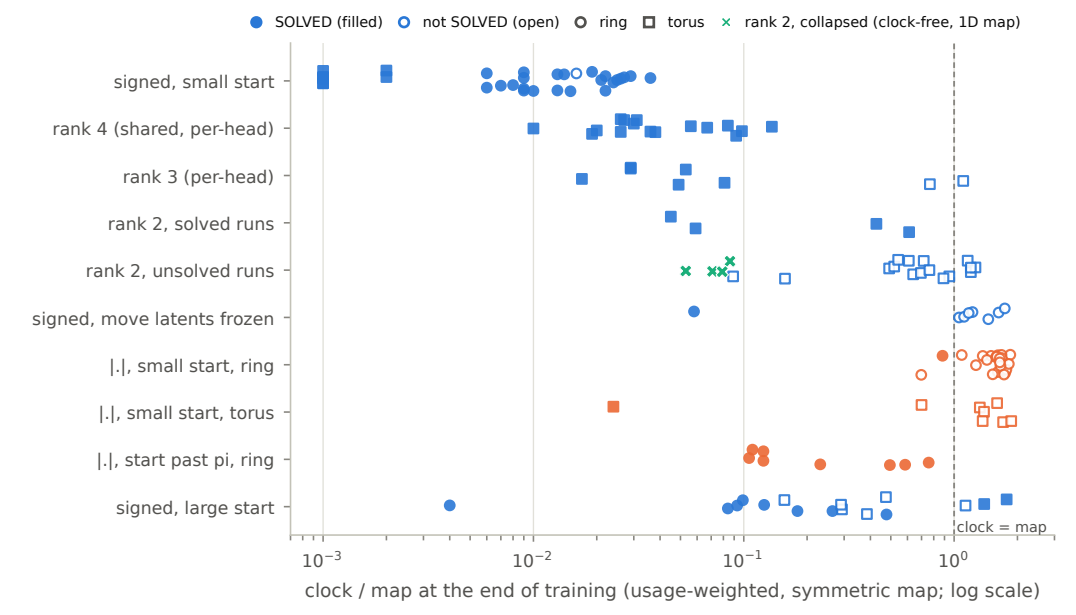
SOLVED (filled)
not SOLVED (open)
ring
torus
rank 2, collapsed (clock-free, 1D map)
signed, small start
rank 4 (shared, per-head)
rank 3 (per-head)
rank 2, solved runs
rank 2, unsolved runs
signed, move latents frozen
|.|, small start, ring
|.|, small start, torus
|.|, start past pi, ring
signed, large start
clock = map
10^{-3}
10^{-2}
10^{-1}
10^{0}
clock / map at the end of training (usage-weighted, symmetric map; log scale)