Process Synchronization

Chapter 5: Process Synchronization

- Background
- The Critical-Section Problem
- Peterson's Solution
- Synchronization Hardware
- Mutex Locks
- Semaphores
- Classic Problems of Synchronization
- Monitors

Objectives

- To present the concept of process synchronization.
- To introduce the critical-section problem, whose solutions can be used to ensure the consistency of shared data
- To present both software and hardware solutions of the critical-section problem
- To examine several classical processsynchronization problems
- To explore several tools that are used to solve process synchronization problems

Background

- Processes can execute concurrently
 - May be interrupted at any time, partially completing execution
- Concurrent access to shared data may result in data inconsistency
- Maintaining data consistency requires mechanisms to ensure the orderly execution of cooperating processes
- Illustration of the problem:
 Suppose that we wanted to provide a solution to the consumer-producer problem that fills all the buffers. We can do so by having an integer counter that keeps track of the number of full buffers. Initially, counter is set to 0.
- It is incremented by the producer after it produces a new buffer and is decremented by the consumer after it consumes a buffer.

Producer

Race Condition

```
• counter++ could be implemented as
        register1 = counter
        register1 = register1 + 1
        counter = register1
• counter -- could be implemented as
         register2 = counter
        register2 = register2 - 1
        counter = register2
• Consider this execution interleaving with "count = 5" initially:
       S0: producer execute register1 = counter
                                                        {register1 = 5}
       S1: producer execute register1 = register1 + 1
                                                       {register1 = 6}
       S2: consumer execute register2 = counter
                                                       {register2 = 5}
      S3: consumer execute register2 = register2 - 1
                                                       {register2 = 4}
       S4: producer execute counter = register1
                                                        {counter = 6 }
       S5: consumer execute counter = register2
                                                       {counter = 4}
```

Consumer

Critical Section Problem

- Consider system of n processes $\{p_0, p_1, ..., p_{n-1}\}$
- Each process has critical section segment of code
 - Process may be changing common variables, updating table, writing file, etc
 - When one process in critical section, no other may be in its critical section
- Critical section problem is to design protocol to solve this
- Each process must ask permission to enter critical section in entry section, may follow critical section with exit section, then remainder section

Critical Section

General structure of process P_i

```
do {
     entry section
          critical section
          exit section
          remainder section
} while (true);
```

Algorithm for Process Pi

```
do {
    while (turn == j);
        critical section
    turn = j;
        remainder section
} while (true);
```

Solution to Critical-Section Problem

- Mutual Exclusion If process P_i is executing in its critical section, then no other processes can be executing in their critical sections
- 2. **Progress** If no process is executing in its critical section and there exist some processes that wish to enter their critical section, then the selection of the processes that will enter the critical section next cannot be postponed indefinitely
- 3. **Bounded Waiting** A bound must exist on the number of times that other processes are allowed to enter their critical sections after a process has made a request to enter its critical section and before that request is granted
 - Assume that each process executes at a nonzero speed
 - No assumption concerning **relative speed** of the **n** processes

Critical-Section Handling in OS

Two approaches depending on if kernel is preemptive or non-preemptive

- Preemptive allows preemption of process when running in kernel mode
- Non-preemptive runs until exits kernel mode, blocks, or voluntarily yields CPU
 - Essentially free of race conditions in kernel mode

Peterson's Solution

- Good algorithmic description of solving the problem
- Two process solution
- Assume that the load and store machine-language instructions are atomic; that is, cannot be interrupted
- The two processes share two variables:
 - int turn;
 Boolean flag[2]
- The variable turn indicates whose turn it is to enter the critical section
- The flag array is used to indicate if a process is ready to enter the critical section. flag[i] = frue implies that process Pi is ready!

Peterson's Solution (Cont.)

- Provable that the three CS requirement are met:
 - 1. Mutual exclusion is preserved

```
P<sub>i</sub> enters CS only if:
     either flag[j] = false or
turn = i
```

- 2. Progress requirement is satisfied
- 3. Bounded-waiting requirement is met

Algorithm for Process Pi

Synchronization Hardware

- Many systems provide hardware support for implementing the critical section code.
- All solutions below based on idea of locking
 - Protecting critical regions via locks
- Uniprocessors could disable interrupts
 - Currently running code would execute without preemption
 - Generally too inefficient on multiprocessor systems
 - Operating systems using this not broadly scalable
- Modern machines provide special atomic hardware instructions
 - Atomic = non-interruptible
 - Either test memory word and set value
 - Or swap contents of two memory words

Problem Using Locks

```
do {
   acquire lock
      critical section
   release lock
      remainder section
} while (TRUE);
```

Solution using test_and_set()

- Shared Boolean variable lock, initialized to FALSE
- Solution:

test_and_set Instruction

Definition:

```
boolean test_and_set (boolean *target)
{
   boolean rv = *target;
   *target = TRUE;
   return rv:
}
```

- 1. Executed atomically
- 2. Returns the original value of passed parameter
- 3. Set the new value of passed parameter to "TRUE".

compare_and_swap Instruction

Definition:

```
int compare _and_swap(int *value, int expected, int new_value) {
   int temp = *value;

   if (*value == expected)
        *value = new_value;
   return temp;
}
```

- Executed atomically
- Returns the original value of passed parameter "value"
- Set the variable "value" the value of the passed parameter "new value" but only if "value" =="expected". That is, the swap takes place only under this condition.

Solution using compare_and_swap

- Shared integer "lock" initialized to 0;
- Solution:

```
do {
   while (compare_and_swap(&lock, 0, 1) != 0)
   ; /* do nothing */
   /* critical section */
lock = 0;
   /* remainder section */
} while (true);
```

Mutex Locks

- Previous solutions are complicated and generally inaccessible to application programmers
- OS designers build software tools to solve critical section problem
- Simplest is mutex lock
- Protect a critical section by first acquire() a lock then release() the lock
 - Boolean variable indicating if lock is available or not
- Calls to acquire() and release() must be atomic
 - Usually implemented via hardware atomic instructions
- But this solution requires busy waiting
 - ☐ This lock therefore called a spinlock

Bounded-waiting Mutual Exclusion with test_and_set do { waiting[i] = true; key = true; while (waiting[i] && key) key = test_and_set(&lock); waiting[i] = false; /* critical section */ j = (i + 1) % n; while ((j != i) && !waiting[j]) j = (j + 1) % n; if (j == i) lock = false; else waiting[j] = false; /* remainder section */ } while (true);

acquire() and release()

```
acquire() {
   while (!available)
       ; /* busy wait */
   available = false;
}
release() {
   available = true;
}
do {
   acquire lock
      critical section
   release lock
   remainder section
} while (true);
```

Semaphore

```
Synchronization tool that provides more sophisticated ways (than Mutex locks) for process to synchronize their activities.

Semaphore S - integer variable

Can only be accessed via two indivisible (atomic) operations

wait() and signal()

Originally called P() and V()

Definition of the Wait() operation

wait(S) {

while (S <= 0)

; // busy wait

S--;
}

Definition of the Signal() operation

signal(S) {

S++;
}
```

Semaphore Implementation

- Must guarantee that no two processes can execute the wait() and signal() on the same semaphore at the same time
- Thus, the implementation becomes the critical section problem where the wait and signal code are placed in the critical section
 - Could now have **busy waiting** in critical section implementation
 - · But implementation code is short
 - · Little busy waiting if critical section rarely occupied
- Note that applications may spend lots of time in critical sections and therefore this is not a good solution

Semaphore Usage

```
Counting semaphore – integer value can range over an unrestricted domain

Binary semaphore – integer value can range only between 0 and 1

Same as a mutex lock

Can solve various synchronization problems

Consider P<sub>1</sub> and P<sub>2</sub> that require S<sub>1</sub> to happen before S<sub>2</sub>

Create a semaphore "synch" initialized to 0

P1:

S<sub>1</sub>;

signal (synch);

P2:

wait (synch);

S<sub>2</sub>;

Can implement a counting semaphore S as a binary semaphore
```

Semaphore Implementation with no Busy waiting

- · With each semaphore there is an associated waiting queue
- Each entry in a waiting queue has two data items:
 - value (of type integer)
 - pointer to next record in the list
- Two operations:
 - block place the process invoking the operation on the appropriate waiting queue
 - wakeup remove one of processes in the waiting queue and place it in the ready queue
- typedef struct{
 int value;
 struct process *list;
 } semaphore;

Implementation with no Busy waiting (Cont.)

```
wait(semaphore *S) {
   S->value--;
   if (S->value < 0) {
      add this process to S->list;
      block();
   }
}
signal(semaphore *S) {
   S->value++;
   if (S->value <= 0) {
      remove a process P from S->list;
      wakeup(P);
   }
}
```

Classical Problems of Synchronization

- Classical problems used to test newlyproposed synchronization schemes
 - Bounded-Buffer Problem
 - Readers and Writers Problem
 - Dining-Philosophers Problem

Deadlock and Starvation

- **Deadlock** two or more processes are waiting indefinitely for an event that can be caused by only one of the waiting processes
- Let \boldsymbol{s} and \boldsymbol{Q} be two semaphores initialized to 1

Starvation – indefinite blocking

A process may never be removed from the semaphore queue in which it is suspended

Priority Inversion – Scheduling problem when lower-priority process holds a lock needed by higher-priority process

Solved via priority-inheritance protocol

Bounded-Buffer Problem

- *n* buffers, each can hold one item
- Semaphore **mutex** initialized to the value 1
- Semaphore **full** initialized to the value 0
- Semaphore **empty** initialized to the value n

Bounded Buffer Problem (Cont.)

Readers-Writers Problem

- A data set is shared among a number of concurrent processes
 - Readers only read the data set; they do *not* perform any updates
 - Writers can both read and write
- Problem allow multiple readers to read at the same time
 - Only one single writer can access the shared data at the same time
- Several variations of how readers and writers are considered – all involve some form of priorities
- Shared Data
 - Data set
 - Semaphore rw_mutex initialized to 1
 - Semaphore mutex initialized to 1

Bounded Buffer Problem (Cont.)

Readers-Writers Problem (Cont.)

• The structure of a writer process

```
do {
          wait(rw_mutex);
          ...
          /* writing is performed */
          ...
          signal(rw_mutex);
} while (true);
```

Readers-Writers Problem (Cont.)

The structure of a reader process

```
do {
    wait(mutex);
    read_count++;
    if (read_count == 1)
    wait(rw_mutex);
    signal(mutex);
    ...
    /* reading is performed */
    ...
    wait(mutex);
    read_count--;
    if (read_count == 0)
    signal(rw_mutex);
    signal(mutex);
} while (true);
```

Dining-Philosophers Problem



- Philosophers spend their lives alternating thinking and eating
- Don't interact with their neighbors, occasionally try to pick up 2 chopsticks (one at a time) to eat from bowl
 - Need both to eat, then release both when done
- In the case of 5 philosophers
 - Shared data
 - Bowl of rice (data set)
 - Semaphore chopstick [5] initialized to 1

Readers-Writers Problem Variations

- First variation no reader kept waiting unless writer has permission to use shared object
- Second variation once writer is ready, it performs the write ASAP
- Both may have starvation leading to even more variations
- Problem is solved on some systems by kernel providing reader-writer locks

Dining-Philosophers Problem Algorithm

Dining-Philosophers Problem Algorithm (Cont.)

Deadlock handling

- Allow at most 4 philosophers to be sitting simultaneously at the table.
- Allow a philosopher to pick up the forks only if both are available (picking must be done in a critical section.
- Use an asymmetric solution -- an odd-numbered philosopher picks up first the left chopstick and then the right chopstick. Even-numbered philosopher picks up first the right chopstick and then the left chopstick.


Problems with Semaphores

- Incorrect use of semaphore operations:
 - signal (mutex) wait (mutex)
 - wait (mutex) ... wait (mutex)
 - Omitting of wait (mutex) or signal (mutex) (or both)
- Deadlock and starvation are possible.

Monitors

- A high-level abstraction that provides a convenient and effective mechanism for process synchronization
- Abstract data type, internal variables only accessible by code within the procedure Only one process may be active within the monitor at a time
- But not powerful enough to model some synchronization schemes

```
monitor monitor-name
 // shared variable declarations
 procedure P1 (...) { .... }
 procedure Pn (...) {.....}
    Initialization code (...) { ... }
}
```

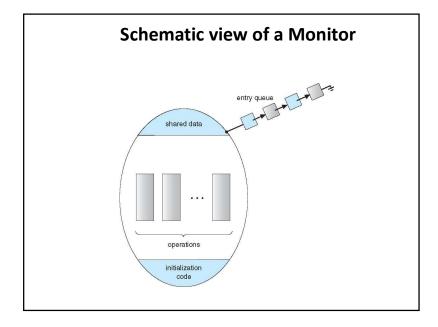


Condition Variables

- condition x, y;
- Two operations are allowed on a condition variable:
 - x.wait() a process that invokes the operation is suspended until x.signal()
 - x.signal() resumes one of processes (if any) that invoked x.wait()
 - If no x.wait() on the variable, then it has no effect on the variable

Condition Variables Choices

- If process P invokes x.signal(), and process Q is suspended in x.wait(), what should happen next?
 - Both Q and P cannot execute in paralel. If Q is resumed, then P must wait
- Options include
 - Signal and wait P waits until Q either leaves the monitor or it waits for another condition
 - Signal and continue Q waits until P either leaves the monitor or it waits for another condition
 - Both have pros and cons language implementer can decide
 - Monitors implemented in Concurrent Pascal compromise
 - P executing signal immediately leaves the monitor, Q is resumed
 - Implemented in other languages including Mesa, C#, Java

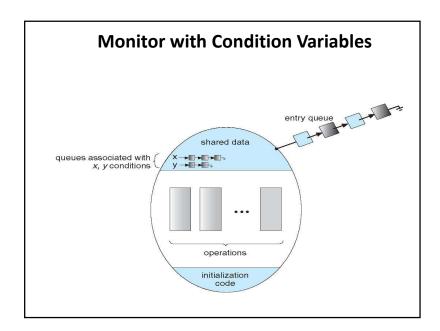

Monitor Solution to Dining Philosophers

Solution to Dining Philosophers (Cont.)

```
void test (int i) {
    if ((state[(i + 4) % 5] != EATING) &&
        (state[i] == HUNGRY) &&
        (state[(i + 1) % 5] != EATING) ) {
            state[i] = EATING ;
        self[i].signal () ;
    }
}

initialization_code() {
    for (int i = 0; i < 5; i++)
        state[i] = THINKING;
}</pre>
```

Monitor Implementation Using Semaphores

```
Variables
```

Solution to Dining Philosophers (Cont.)

 Each philosopher i invokes the operations pickup() and putdown() in the following sequence:

```
DiningPhilosophers.pickup(i);
```

DiningPhilosophers.putdown(i);

• No deadlock, but starvation is possible

Monitor Implementation – Condition Variables

```
For each condition variable x, we have:
```

```
semaphore x_sem; // (initially =
0)
    int x_count = 0;
The operation v wait can be implemented as
```

The operation x.wait can be implemented as:

```
x_count++;
if (next_count > 0)
    signal(next);
else
    signal(mutex);
wait(x_sem);
x count--;
```

Monitor Implementation (Cont.)

• The operation **x.signal** can be implemented as:

```
if (x_count > 0) {
  next_count++;
  signal(x_sem);
  wait(next);
  next_count--;
}
```

Single Resource allocation

Allocate a single resource among competing processes using priority numbers that specify the maximum time a process plans to use the resource

```
R.acquire(t);
...
access the resurce;
...
R.release;
```

Where R is an instance of type ResourceAllocator

Resuming Processes within a Monitor

- If several processes queued on condition x, and x.signal() executed, which should be resumed?
- FCFS frequently not adequate
- conditional-wait construct of the form x.wait(c)
 - Where c is **priority number**
 - Process with lowest number (highest priority) is scheduled next

A Monitor to Allocate Single Resource

```
monitor ResourceAllocator
{
  boolean busy;
  condition x; a
  void acquire(int time) {
      if (busy)
            x.wait(time);
      busy = TRUE;
  }
  void release() {
      busy = FALSE;
      x.signal();
  }
initialization code() {
  busy = FALSE;
  }
}
```