

PIZZA RESTAURANT

SQL PROJECT

PIZZA SALES






*Retrieve the total number of
orders placed.*

```
SELECT count(order_id) as total_order_placed from orders;
```

Result Grid			Filter Rows:
	total_order_placed		
▶	21350		

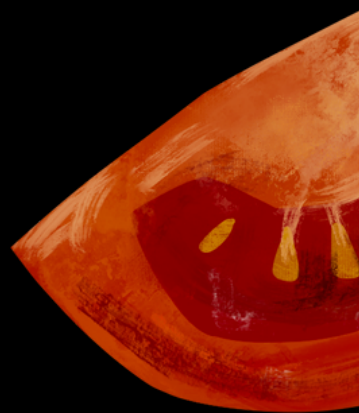




Calculate the total revenue generated from pizza sales.

```
use pizzahut;  
  
select round(sum(o.quantity*od.price),2) as total_sales  
from pizzahut.order_details as o  
inner join pizzahut.pizzas as od  
on o.pizza_id = od.pizza_id;
```

Result Grid



	total_sales
	104024.45

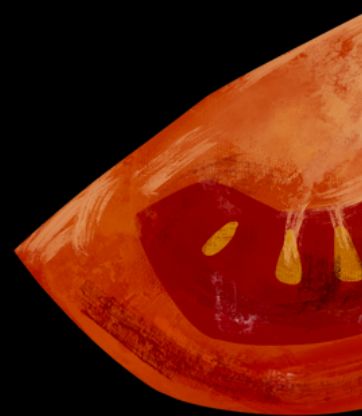



Identify the highest price pizza.

```
SELECT
    pizza_id, price
FROM
    pizzas
WHERE
    price = (SELECT
                MAX(price)
            FROM
                pizzas);
```




Result Grid			Filter Rows:
	pizza_id	price	
▶	the_greek_xxl	35.95	



Identify the most common pizza size ordered.

```
SELECT
  pizzas.size,
  COUNT(order_details.order_details_id) AS order_count
FROM
  pizzas
  JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC
LIMIT 1
```

Result Grid			Filter Rows:
	size	order_count	
▶	L	2371	

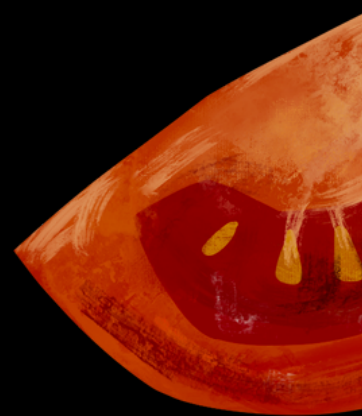



List the top 5 most ordered pizza types along with their quantities.

```
use pizzahut;  
SELECT  
    p.name, SUM(od.quantity) AS total_quantity  
FROM  
    pizza_types p  
    JOIN  
    pizzas pz ON p.pizza_type_id = pz.pizza_type_id  
    JOIN  
    order_details od ON pz.pizza_id = od.pizza_id  
GROUP BY p.name order by total_quantity desc limit 5
```



Result Grid			Filter Rows:
	name	total_quantity	
▶	The Pepperoni Pizza	350	
	The Barbecue Chicken Pizza	323	
	The California Chicken Pizza	305	
	The Hawaiian Pizza	284	
	The Classic Deluxe Pizza	279	





Join the necessary tables to find the total quantity of each pizza ordered.

```
select p.category,sum(od.quantity) as quantity
from pizza_types p
join pizzas pz
on p.pizza_type_id = pz.pizza_type_id
join order_details od on pz.pizza_id = od.pizza_id
group by p.category order by quantity desc
```



Result Grid			Filter Rows:
	category	quantity	
▶	Classic	1873	
	Supreme	1569	
	Veggie	1508	
	Chicken	1365	





Determine the distribution of orders by hour of the day.

```
use pizzahut;  
  
SELECT  
    HOUR(order_time), COUNT(order_id)  
FROM  
    orders  
GROUP BY HOUR(order_time)
```



Result Grid			Filter Rows:
	HOUR(order_time)	COUNT(order_id)	
▶	11	1231	
	12	2520	
	13	2455	
	14	1472	
	15	1468	
	16	1920	
	17	2336	






Join relevant tables to find the category wise distribution of pizza.

```
select category, count(name) from pizza_types  
group by category
```

Result Grid			Filter Rows:
	category	count(name)	
▶	Chicken	6	
	Classic	8	
	Supreme	9	
	Veggie	9	

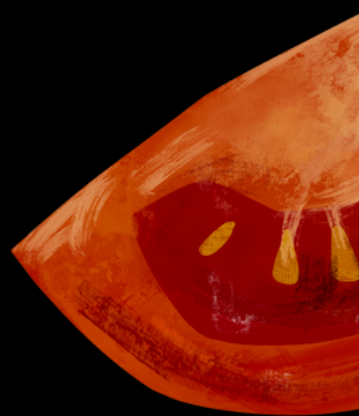



*Group the orders by date and
calculate the average number of
pizzas ordered per day.*

```
use pizzahut;  
select round(avg(x),0) as avg_pizza_ordered_per_day from  
(select o.order_date, sum(od.quantity) as x  
from order_details od  
join orders o  
on o.order_id = od.order_id  
group by o.order_date) as order_quantity
```



Result Grid			 Filter Rows:
	avg_pizza_ordered_per_day		
▶	137		





Determine the top 3 most ordered pizza types based on revenue.

```
use pizzahut;  
select pt.name, sum(od.quantity*p.price) as revenue  
from pizza_types pt  
join pizzas p  
on p.pizza_type_id = pt.pizza_type_id  
join order_details od  
on od.pizza_id = p.pizza_id  
group by pt.name  
order by revenue desc limit 3
```



Result Grid			Filter Rows:
	name	revenue	
▶	The Barbecue Chicken Pizza	5762.25	
	The California Chicken Pizza	5240.75	
	The Thai Chicken Pizza	5072.5	





Calculate the percentage contribution of each pizza type to total revenue.

```
SELECT
    pizza_types.category,
    (SUM(order_details.quantity * pizzas.price) /
     (SELECT ROUND(SUM(order_details.quantity * pizzas.price), 2) AS total_sales
      FROM order_details
      JOIN pizzas ON pizzas.pizza_id = order_details.pizza_id)) * 100 AS percentage_contribution
FROM pizza_types
JOIN pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
JOIN order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY percentage_contribution DESC
LIMIT 0, 1000;
```



Result Grid			Filter Rows:
	category	percentage_contribution	
▶	Classic	26.526071514917888	
	Supreme	26.032437566360638	
	Veggie	24.20104119752623	
	Chicken	23.240449721195354	





*Determine the top 3 most ordered pizza types
based on revenue for each pizza category.*

```
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity)*pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn<=3;
```



Result Grid			Filter Rows:
	name	revenue	
▶	The Barbecue Chicken Pizza	5762.25	
	The California Chicken Pizza	5240.75	
	The Thai Chicken Pizza	5072.5	

