ShoppyGlobe E-Commerce API Documentation

Node.js | Express.js | MongoDB | JWT

API Endpoints

Method	Endpoint	Auth	Description
POST	/api/register	No	Register a new user
POST	/api/login	No	Login and get JWT token
GET	/api/products	No	Fetch all products
GET	/api/products/:id	No	Fetch single product by ID
POST	/api/cart	Yes	Add product to cart
PUT	/api/cart/:productId	Yes	Update cart item quantity
DELETE	/api/cart/:productId	Yes	Remove item from cart

1. POST /api/register — Register User

Method: POST	**URL:** http://localhost:3000/api/register
Status: 201 Created	**Auth:** Not Required

Request Body: `{ "name": "Jane Doe", "email": "jane@gmail.com", "password": "123456" }`

Response: `{ "message": "user registered successfully", "user": { "id": "69acc3a...", "email": "jane@gmail.com" } }`

Thunder Client Screenshot:

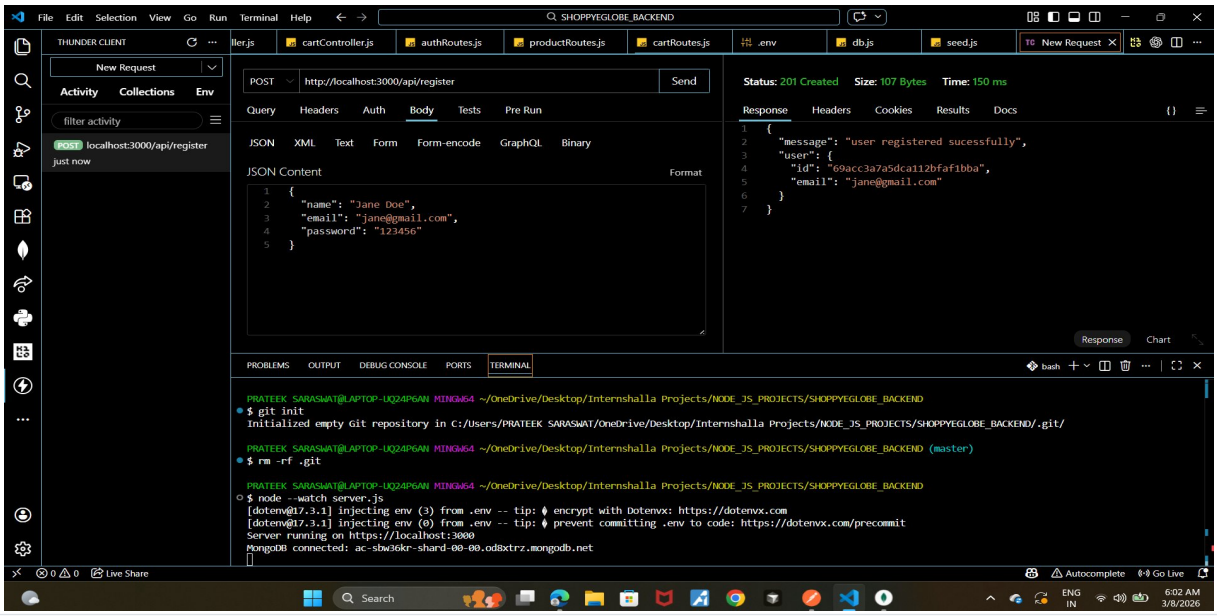

2. POST /api/login — Login User

Method: POST	**URL:** http://localhost:3000/api/login
Status: 200 OK	**Auth:** Not Required

Request Body: `{ "email": "jane@gmail.com", "password": "123456" }`

Response: `{ "message": "Login successful", "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6...", "user": { "id": "...", "name": "Jane Doe" } }`

Thunder Client Screenshot:

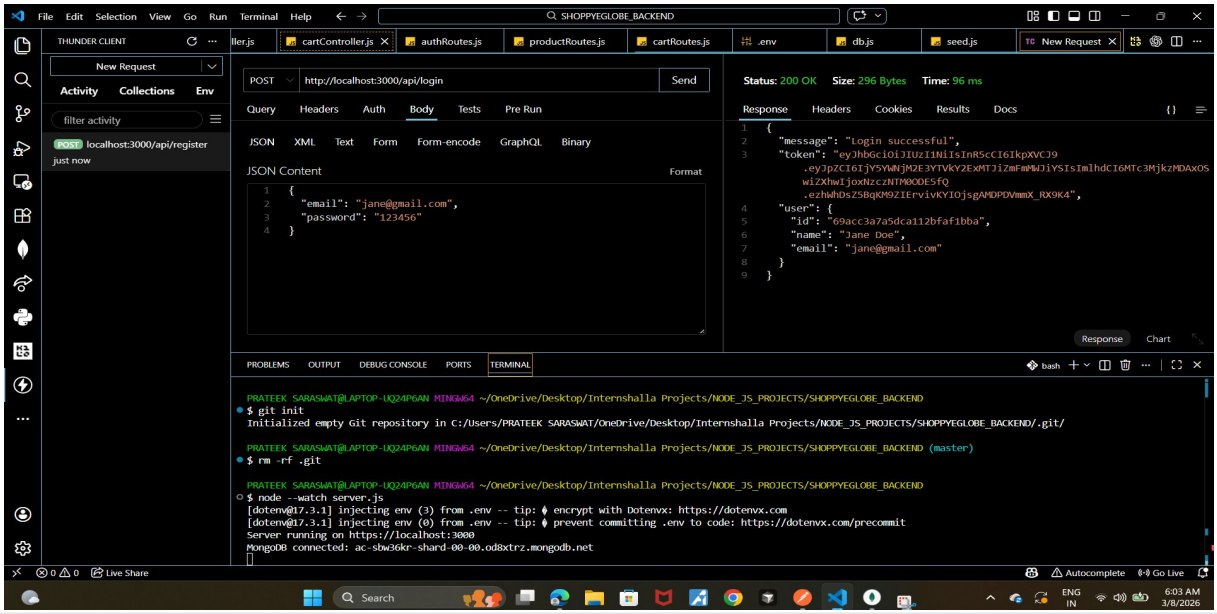

3. GET /api/products — Get All Products

Method: GET	**URL:** http://localhost:3000/api/products
Status: 200 OK	**Auth:** Not Required

Request Body: No request body required

Response: { "message": "products fetched successfully", "products": [{ "_id": "...", "name": "iPhone 15", "price": 999, ... }, { "_id": "...", "name": "Nike Air Max", "price": 129, ... }] }

Thunder Client Screenshot:

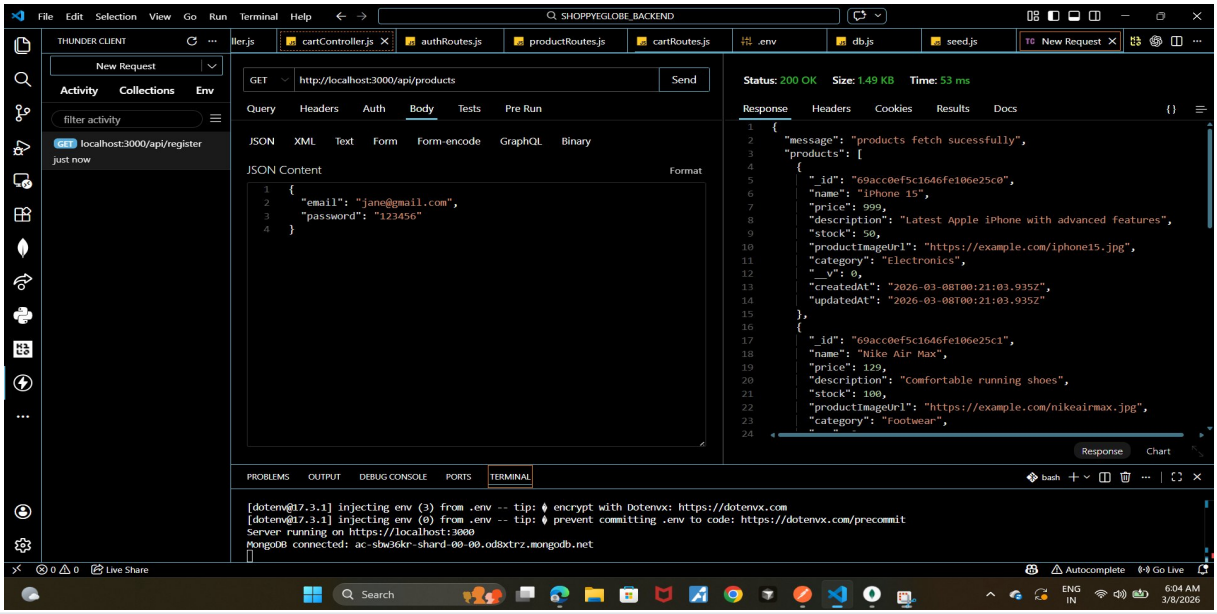

4. GET /api/products/:id — Get Single Product

Method: GET	**URL:** http://localhost:3000/api/products/69acc0ef5c1646fe106e25c0
Status: 200 OK	**Auth:** Not Required

Request Body: No request body required

Response:

```
{ "message": "product fetched successfully", "product": { "_id": "69acc0ef5c1646fe106e25c0", "name": "iPhone 15", "price": 999, "stock": 50 } }
```


Thunder Client Screenshot:

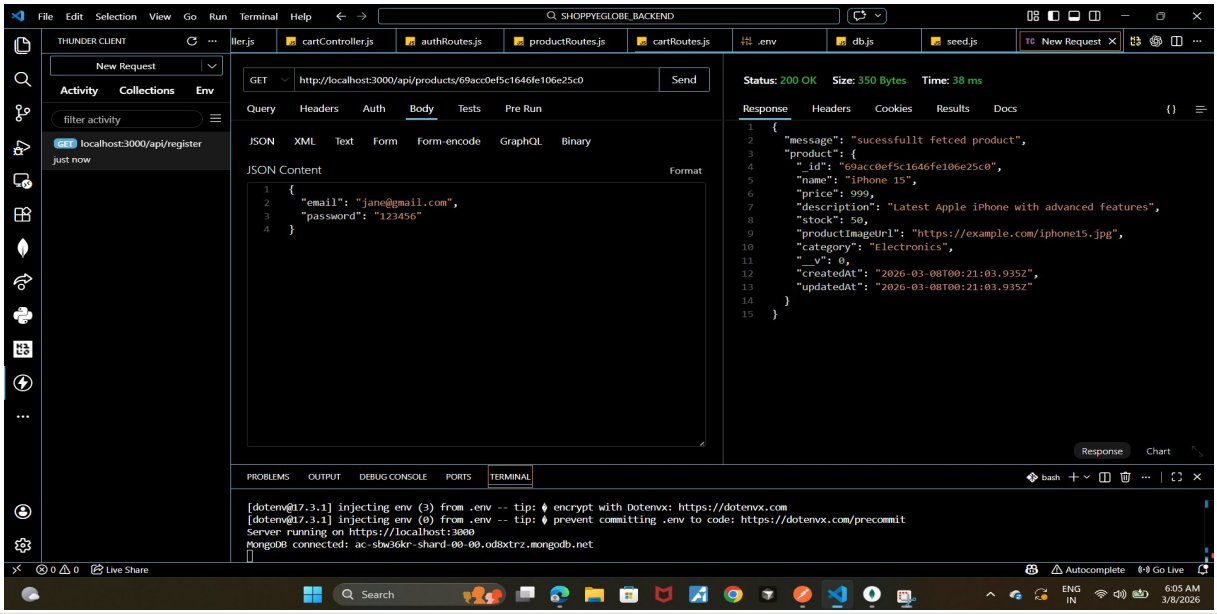

5. POST /api/cart — Add to Cart

Method: POST	**URL:** http://localhost:3000/api/cart
Status: 200 OK	**Auth:** Required — Bearer Token

Request Body: `{ "productId": "69acc0ef5c1646fe106e25c0", "quantity": 2 }`

Response: `{ "message": "Item added to cart", "cart": { "userId": "69acc1d0...", "items": [{ "productId": "...", "quantity": 2 }] } }`

Thunder Client Screenshot:

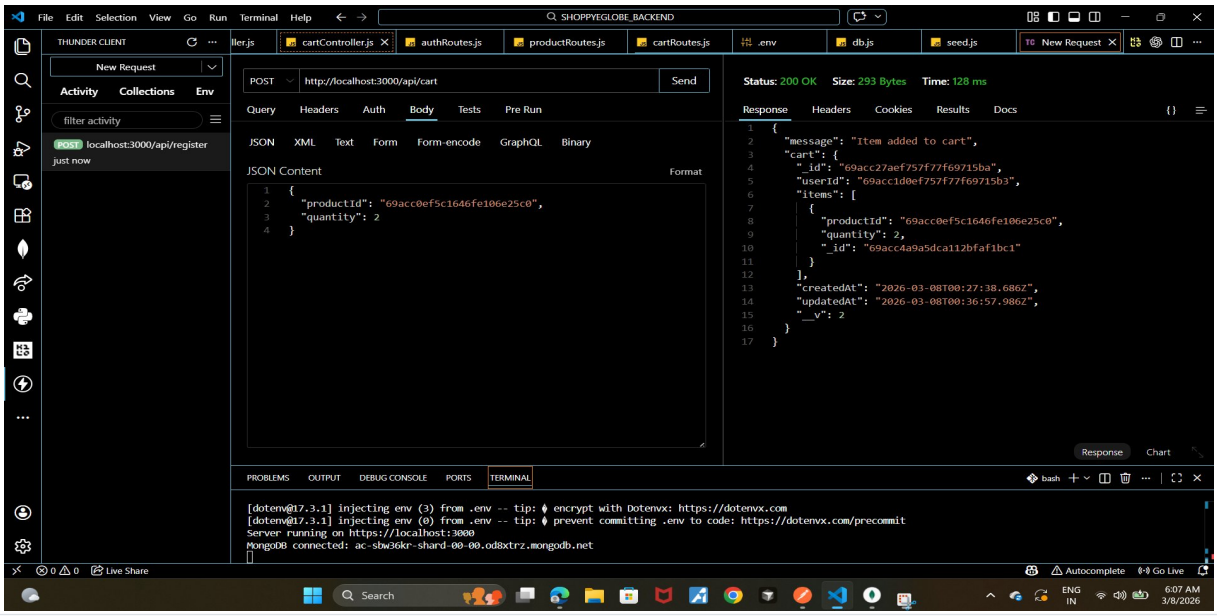

6. PUT /api/cart/:productId — Update Cart

Method: PUT	**URL:** http://localhost:3000/api/cart/69acc0ef5c1646fe106e25c0
Status: 200 OK	**Auth:** Required — Bearer Token

Request Body: `{ "quantity": 5 }`

Response: `{ "message": "Cart updated successfully", "cart": { "items": [{ "productId": "...", "quantity": 5 }] } }`

Thunder Client Screenshot:

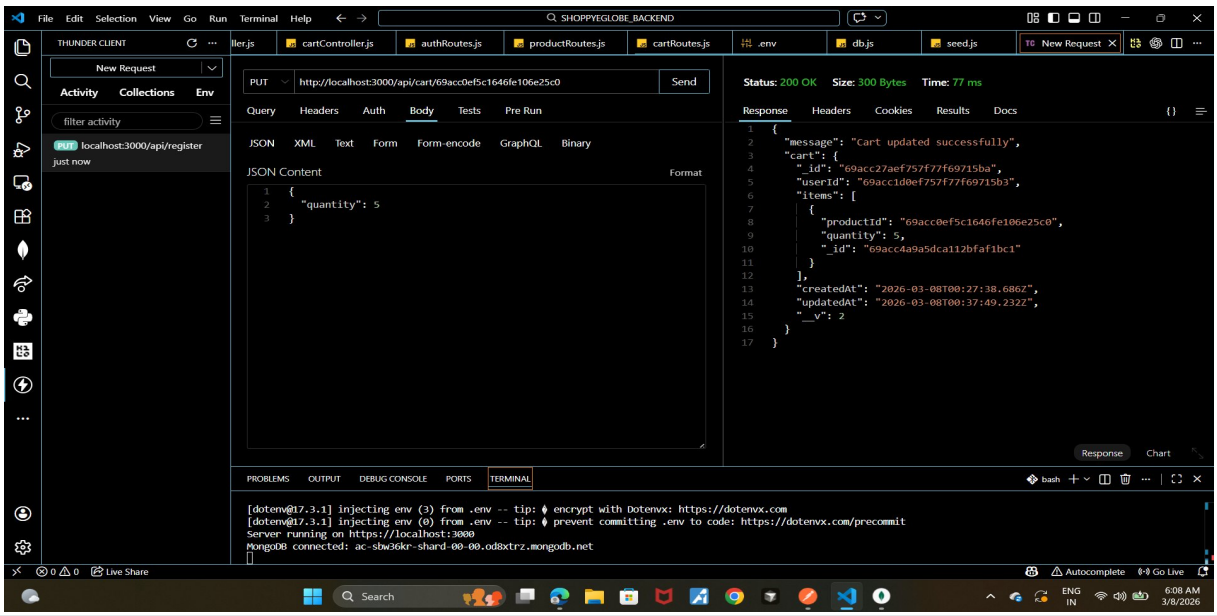

7. DELETE /api/cart/:productId — Remove from Cart

Method: DELETE	**URL:** http://localhost:3000/api/cart/69acc0ef5c1646fe106e25c0
Status: 200 OK	**Auth:** Required — Bearer Token

Request Body: No request body required

Response: { "message": "Item removed from cart", "cart": { "items": [] // empty after removal } }

Thunder Client Screenshot:

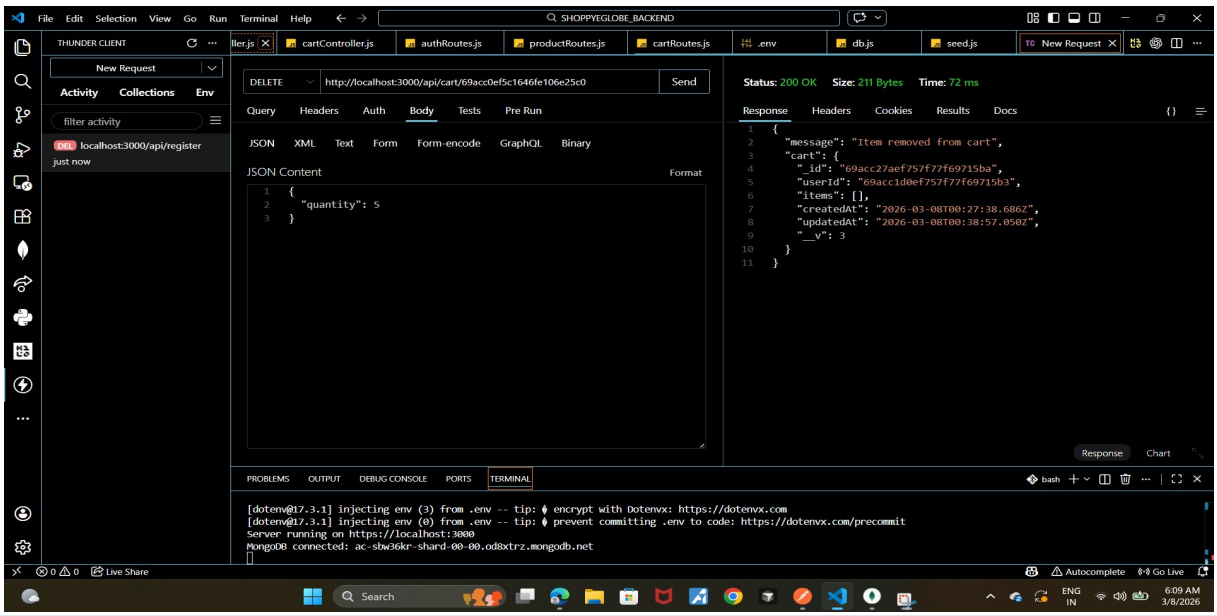

MongoDB Atlas — Database Screenshots

The following screenshots show the ShoppyGlobe database collections in MongoDB Atlas, confirming successful data storage.

Collection 1: carts

Stores cart data for each user. Contains userId reference, items array with productId and quantity, and timestamps.

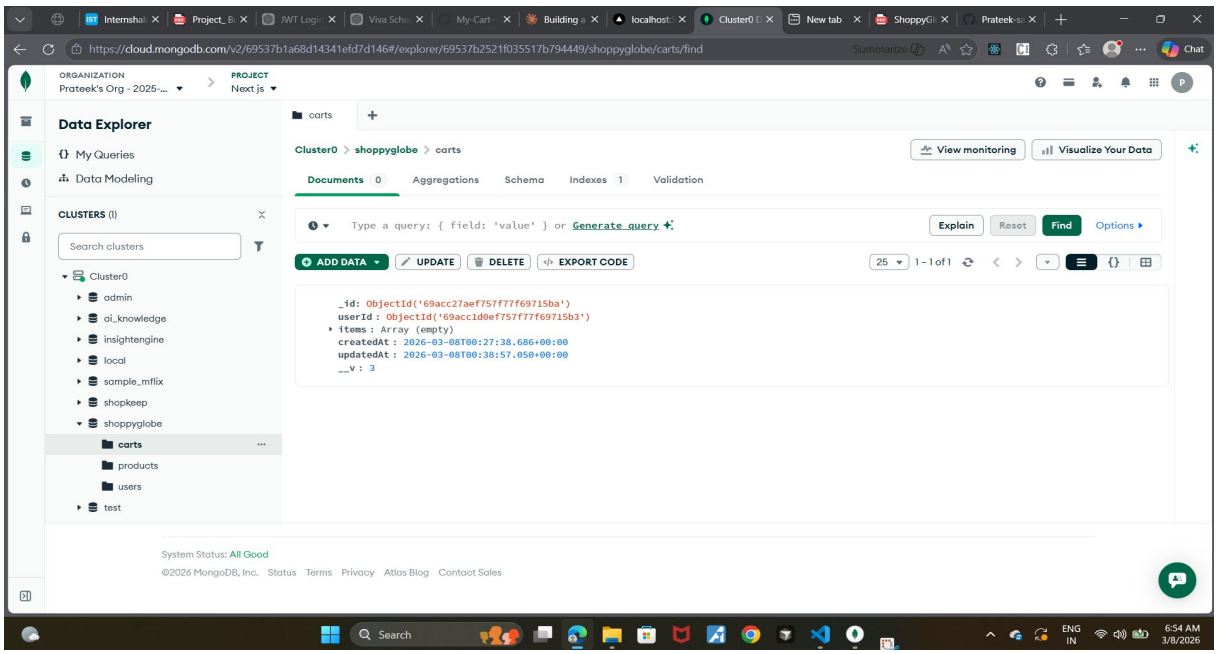

Collection 2: products

Stores all 5 seeded products. Each document contains name, price, description, stock, productImageUrl, category, and timestamps.

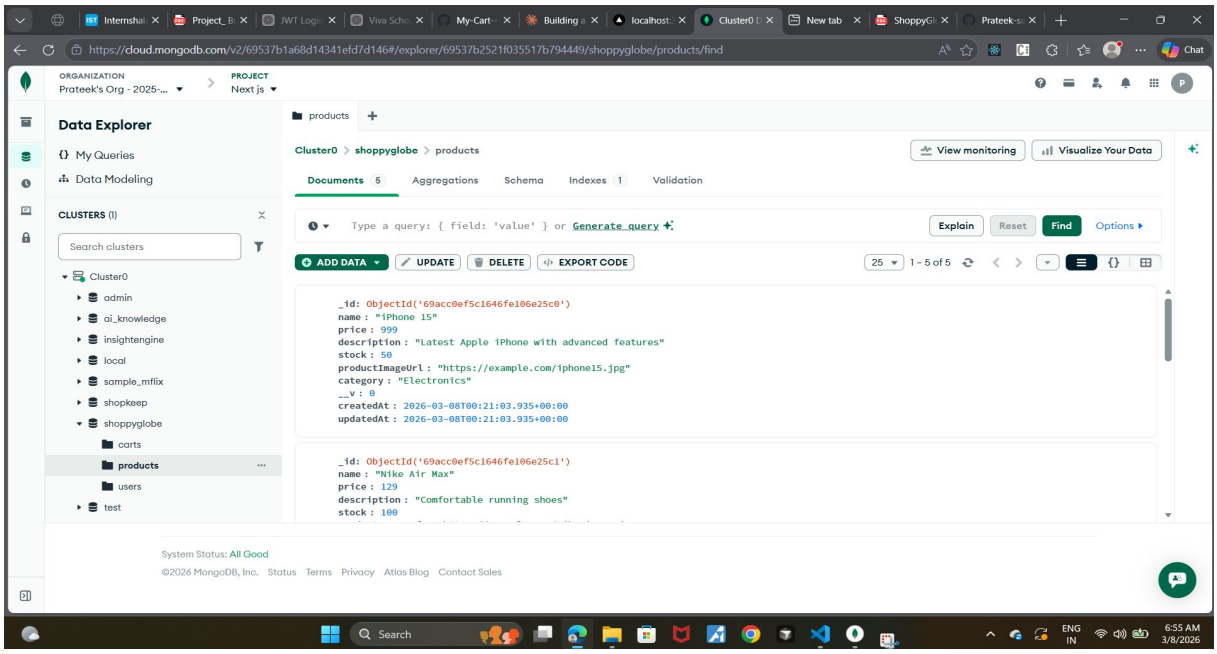

Collection 3: users
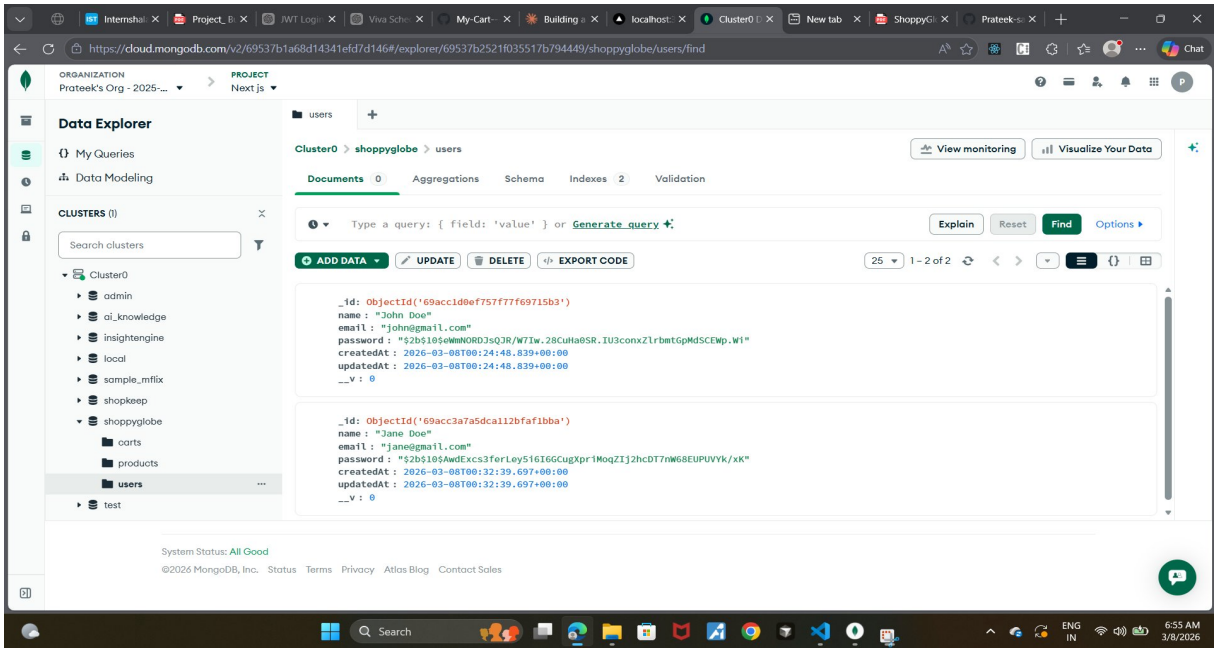
Stores registered users. Passwords are hashed using bcryptjs — plain text passwords are never stored in the database.