

1. index.html

This file uses **Directives** (`ng-app`, `ng-model`, `ng-show`) to connect the UI to the logic.

```
<!DOCTYPE html>
<html ng-app="authApp">

<head>
  <meta charset="UTF-8">
  <title>AngularJS Registration & Login Assignment</title>
  <link rel="stylesheet" href="style.css">
  <script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.8.2/angular.min.js"
></script>
</head>

<body ng-controller="AuthController">

  <div class="main-wrapper">
    <div class="container" ng-class="{ 'right-panel-active':
isRegisterMode}">

      <div class="form-container sign-up-container">
        <form name="regForm"
ng-submit="handleRegister(regForm.$valid)" novalidate>
          <h1>Create Account</h1>
          <span>Use your details for registration</span>

          <div class="input-group">
            <input type="text" ng-model="regData.fName"
placeholder="First Name" required />
            <input type="text" ng-model="regData.lName"
placeholder="Last Name" required />
          </div>

          <input type="text" name="uName"
ng-model="regData.username" placeholder="Username" required />
          <p class="error-text" ng-show="regForm.uName.$touched
&& regForm.uName.$invalid">Username is
            required</p>

          <input type="password" name="pass"
ng-model="regData.password" placeholder="Password"
            ng-minlength="6" required />
          <p class="error-text"
ng-show="regForm.pass.$error.minlength">Min 6 characters required</p>

          <button type="submit" class="primary-btn">Sign
Up</button>
        </form>
      </div>
    </div>
  </div>
</body>
</html>
```

```
</div>

<div class="form-container sign-in-container">
  <form name="loginForm" ng-submit="handleLogin()">
    <h1>Sign In</h1>
    <span>Enter your credentials</span>

    <input type="text" ng-model="loginData.username"
placeholder="Username" required />
    <input type="password" ng-model="loginData.password"
placeholder="Password" required />

    <div class="live-status" ng-show="loginData.username">
      Logging in as:
<strong>{{loginData.username}}</strong>
    </div>

    <button type="submit"
class="primary-btn">Login</button>
  </form>
</div>

<div class="overlay-container">
  <div class="overlay">
    <div class="overlay-panel overlay-left">
      <h1>Welcome Back!</h1>
      <p>To keep connected with us please login with your
personal info</p>
      <button class="ghost-btn"
ng-click="toggleMode()">Sign In</button>
    </div>
    <div class="overlay-panel overlay-right">
      <h1>Hello, Friend!</h1>
      <p>Enter your personal details and start journey
with us</p>
      <button class="ghost-btn"
ng-click="toggleMode()">Sign Up</button>
    </div>
  </div>
</div>

</div>
</div>

<script src="app.js"></script>
</body>

</html>
```

2. style.css

This provides the **Animated Poster UI** and ensures it looks best on a laptop/computer screen.

```
@import
url('https://fonts.googleapis.com/css2?family=Poppins:wght@300;400;600&dis
play=swap');

* {
  box-sizing: border-box;
}

body {
  background: #e9ecef;
  font-family: 'Poppins', sans-serif;
  margin: 0;
  height: 100vh;
  display: flex;
  justify-content: center;
  align-items: center;
}

/* Centers the UI on large screens */
.main-wrapper {
  width: 100%;
  display: flex;
  justify-content: center;
  padding: 20px;
}

.container {
  background-color: #fff;
  border-radius: 20px;
  box-shadow: 0 20px 50px rgba(0, 0, 0, 0.15);
  position: relative;
  overflow: hidden;
  width: 1000px;
  /* Large screen width */
  max-width: 100%;
  min-height: 600px;
  /* Taller for better spacing */
}

/* Forms */
.form-container {
  position: absolute;
  top: 0;
  height: 100%;
  transition: all 0.6s ease-in-out;
}

form {
  background-color: #ffffff;
  display: flex;
```

```
    align-items: center;
    justify-content: center;
    flex-direction: column;
    padding: 0 60px;
    height: 100%;
    text-align: center;
}

h1 {
    font-weight: 600;
    margin: 0 0 10px;
    color: #333;
}

span {
    font-size: 13px;
    color: #777;
    margin-bottom: 15px;
}

input {
    background-color: #f4f7f6;
    border: 1px solid #eee;
    padding: 15px;
    margin: 10px 0;
    width: 100%;
    border-radius: 10px;
    font-size: 14px;
}

.input-group {
    display: flex;
    gap: 10px;
    width: 100%;
}

/* Buttons */
.action-btn {
    border-radius: 25px;
    border: none;
    background: linear-gradient(to right, #4e54c8, #8f94fb);
    color: #FFFFFF;
    font-size: 14px;
    font-weight: 600;
    padding: 15px 60px;
    letter-spacing: 1px;
    text-transform: uppercase;
    cursor: pointer;
    margin-top: 20px;
    transition: transform 0.2s ease;
}

.action-btn:hover {
```

```
    transform: scale(1.05);
}

.ghost-btn {
    background: transparent;
    border: 2px solid #fff;
    color: #fff;
    border-radius: 25px;
    padding: 12px 45px;
    cursor: pointer;
    font-weight: 600;
    text-transform: uppercase;
}

/* Animation Logic */
.sign-in-container {
    left: 0;
    width: 50%;
    z-index: 2;
}

.sign-up-container {
    left: 0;
    width: 50%;
    opacity: 0;
    z-index: 1;
}

.container.right-panel-active .sign-in-container {
    transform: translateX(100%);
}

.container.right-panel-active .sign-up-container {
    transform: translateX(100%);
    opacity: 1;
    z-index: 5;
}

/* Poster Overlay */
.overlay-container {
    position: absolute;
    top: 0;
    left: 50%;
    width: 50%;
    height: 100%;
    overflow: hidden;
    transition: transform 0.6s ease-in-out;
    z-index: 100;
}

.container.right-panel-active .overlay-container {
    transform: translateX(-100%);
}
```

```
.overlay {
  background: #4e54c8;
  background: linear-gradient(135deg, #4e54c8 0%, #8f94fb 100%);
  color: #FFFFFF;
  position: relative;
  left: -100%;
  height: 100%;
  width: 200%;
  transform: translateX(0);
  transition: transform 0.6s ease-in-out;
}

.container.right-panel-active .overlay {
  transform: translateX(50%);
}

.overlay-panel {
  position: absolute;
  display: flex;
  align-items: center;
  justify-content: center;
  flex-direction: column;
  padding: 0 50px;
  text-align: center;
  top: 0;
  height: 100%;
  width: 50%;
}

.overlay-left {
  transform: translateX(-20%);
}

.container.right-panel-active .overlay-left {
  transform: translateX(0);
}

.overlay-right {
  right: 0;
}

/* Decorations */
.social-links {
  margin: 15px 0;
  display: flex;
  gap: 10px;
}

.circle-btn {
  border: 1px solid #ddd;
  border-radius: 50%;
  width: 40px;
```

```
height: 40px;
display: flex;
justify-content: center;
align-items: center;
cursor: pointer;
font-weight: bold;
}
```

3. app.js

This is the **Controller** where all the logic lives.

```
var app = angular.module('authApp', []);

app.controller('AuthController', function ($scope) {
    // 1. DATA (The Model)
    $scope.isRegisterMode = false;
    $scope.regData = {};
    $scope.loginData = {};

    // 2. LOGIC (The Controller)
    $scope.toggleMode = function () {
        $scope.isRegisterMode = !$scope.isRegisterMode;
    };

    $scope.handleRegister = function (isValid) {
        if (isValid) {
            alert("Success! " + $scope.regData.firstName + " is now registered.");
            console.log("Registered User Data:", $scope.regData);
            $scope.toggleMode();
        } else {
            alert("Please fill all fields correctly!");
        }
    };

    $scope.handleLogin = function () {
        // Two-way binding allows us to access $scope.loginData instantly
        if ($scope.loginData.username === "admin" && $scope.loginData.password === "123") {
            alert("Welcome Back, Admin!");
        } else {
            alert("Login Failed. Try Username: admin, Pass: 123");
        }
    };
});
```

1. Introduction to AngularJS



AngularJS is a **JavaScript Framework** developed by Google. It follows the **MVC (Model-View-Controller)** pattern, which helps in separating the business logic from the user interface. It is primarily used to build **Single Page Applications (SPAs)** where the page doesn't refresh when the user interacts with it.



2. Key Concepts Used in this Code:



- **Directives (ng-):** These are markers on a DOM element that tell AngularJS to attach a specific behavior.
 - **ng-app:** Defines the root of the application.
 - **ng-controller:** Attaches the JavaScript logic (Controller) to the HTML.
 - **ng-model:** Connects the input field to a variable in the controller (**Two-Way Data Binding**).
 - **ng-show:** Displays or hides an element based on a condition (used for error messages).
- **Two-Way Data Binding:** When you type in the login box, the variable `loginData.username` is updated automatically in the background. We show this using `{{ loginData.username }}`.
- **Form Validation:** AngularJS tracks the state of forms. We used `regForm.$valid` to ensure the "Sign Up" button only works if the user fills in all required data.

3. Step-by-Step Execution Procedure:

1. **Environment Setup:** Ensure you have a browser (Chrome/Edge) and a text editor (VS Code).
2. **File Creation:** Create a folder and save the three files (`index.html`, `style.css`, `app.js`).
3. **Library Linking:** The code links to the AngularJS library via a **CDN** (Content Delivery Network) in the `<script>` tag.
4. **Running the App:** Open `index.html` in the browser.
5. **Testing:** Click "Sign Up" on the poster. Fill in the fields. Observe the error messages if you leave a field blank. Click "Sign In" and use the credentials `admin / 123`.

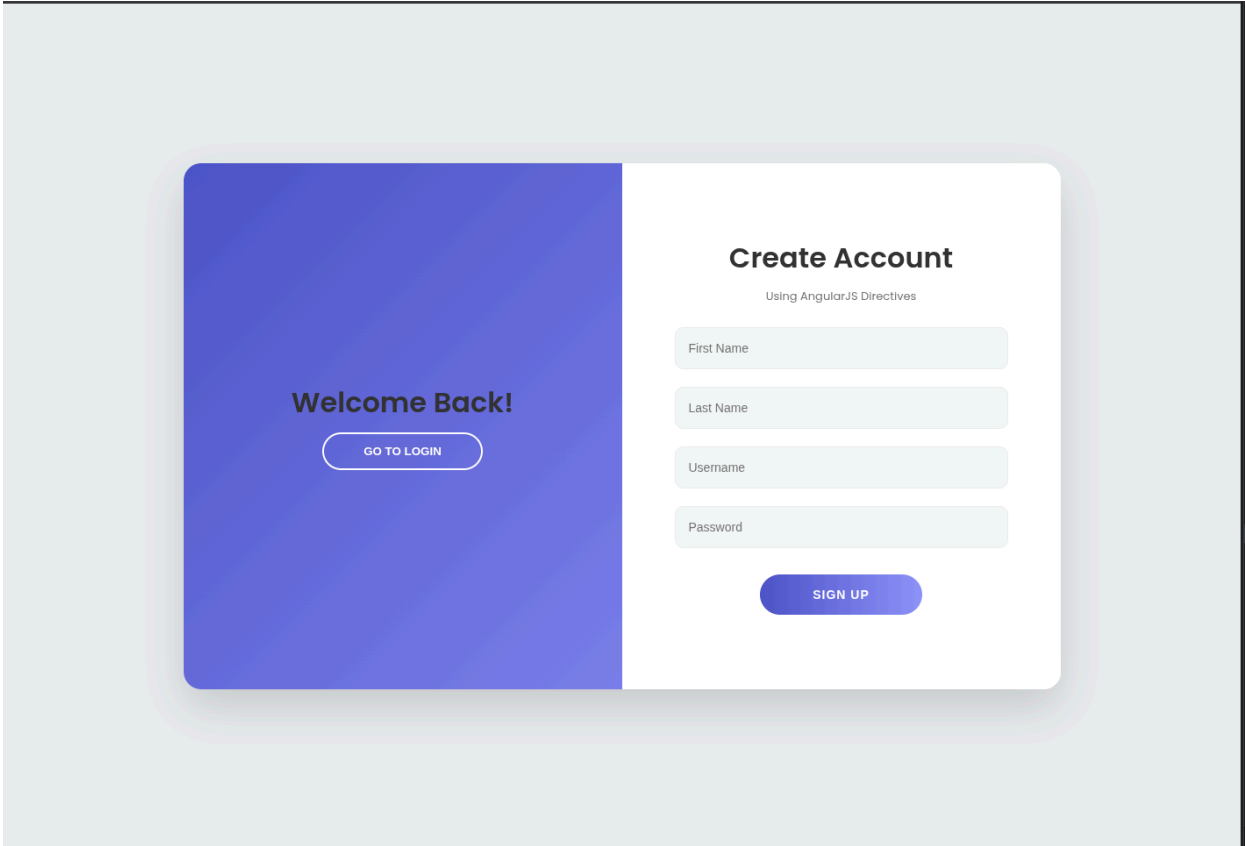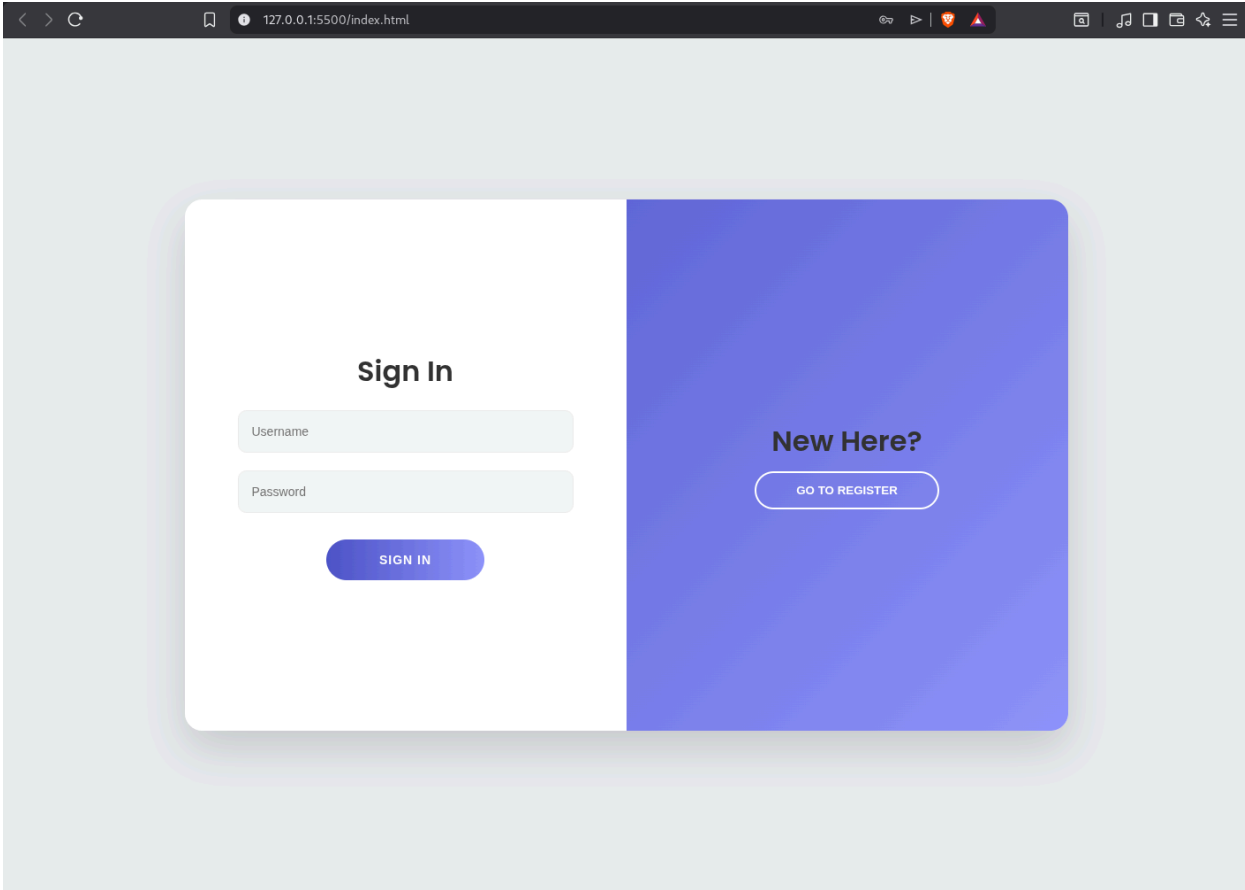

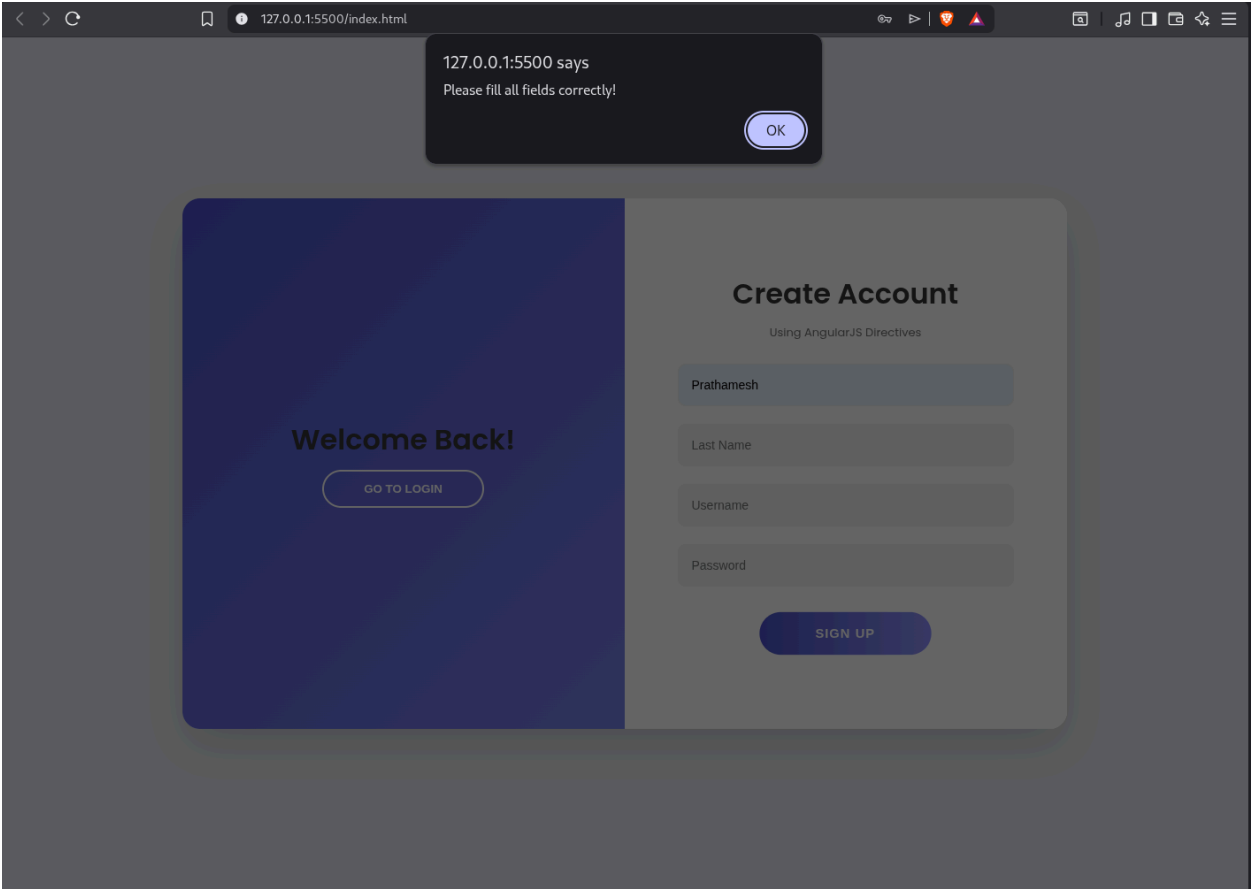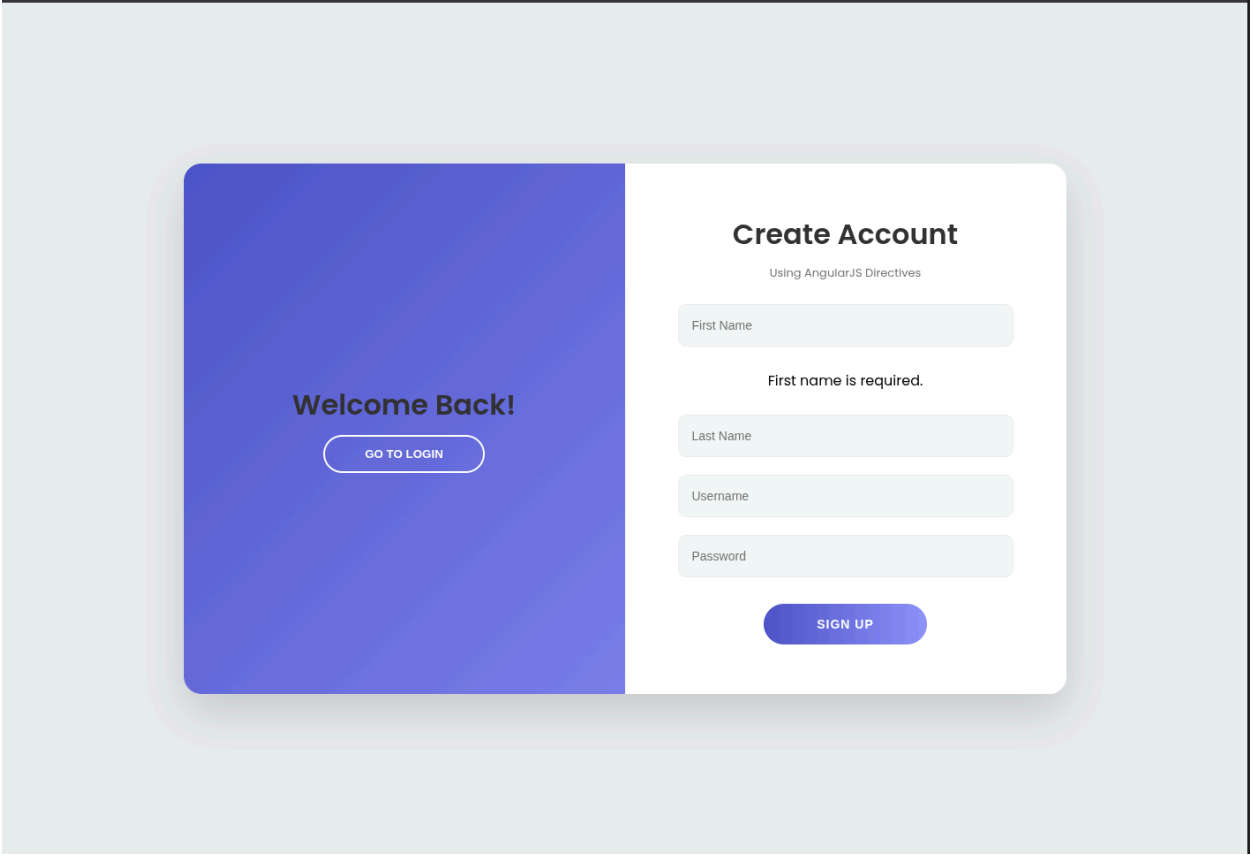

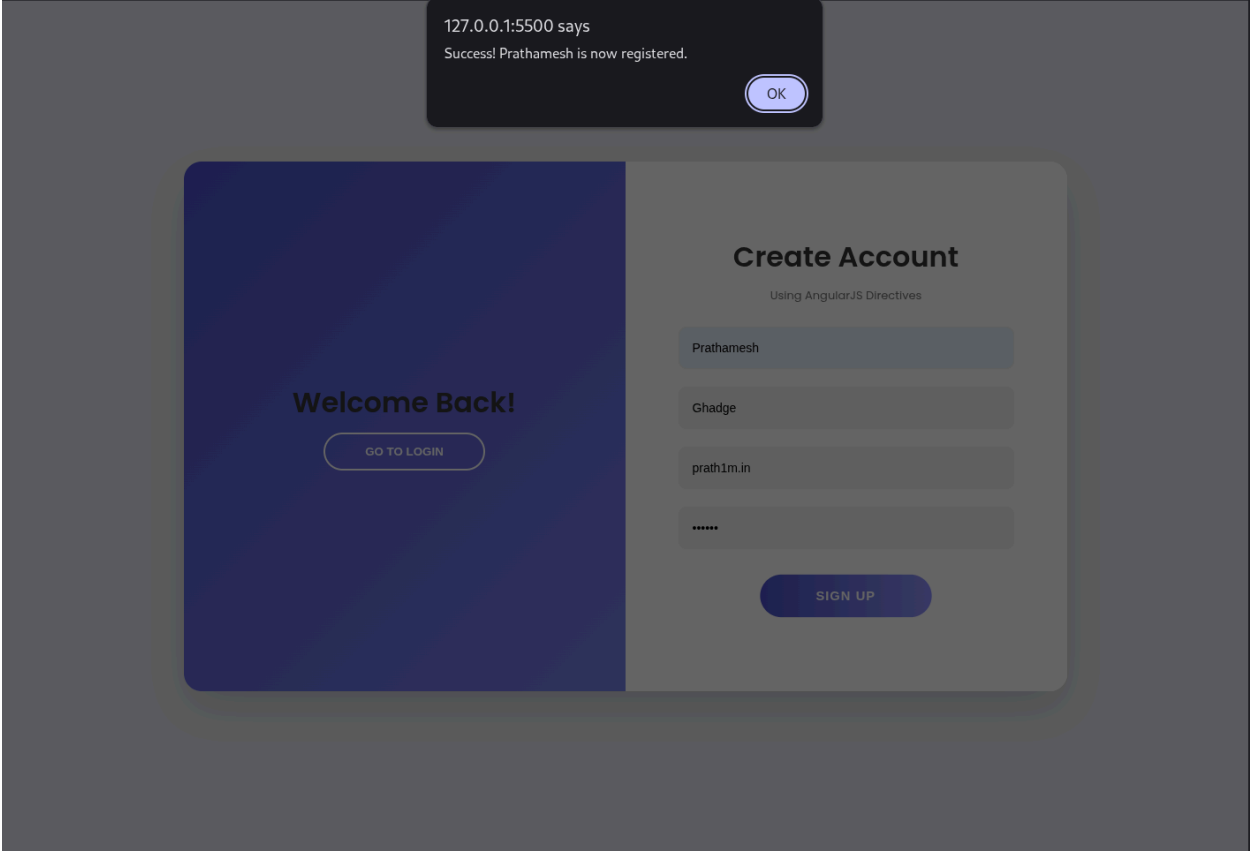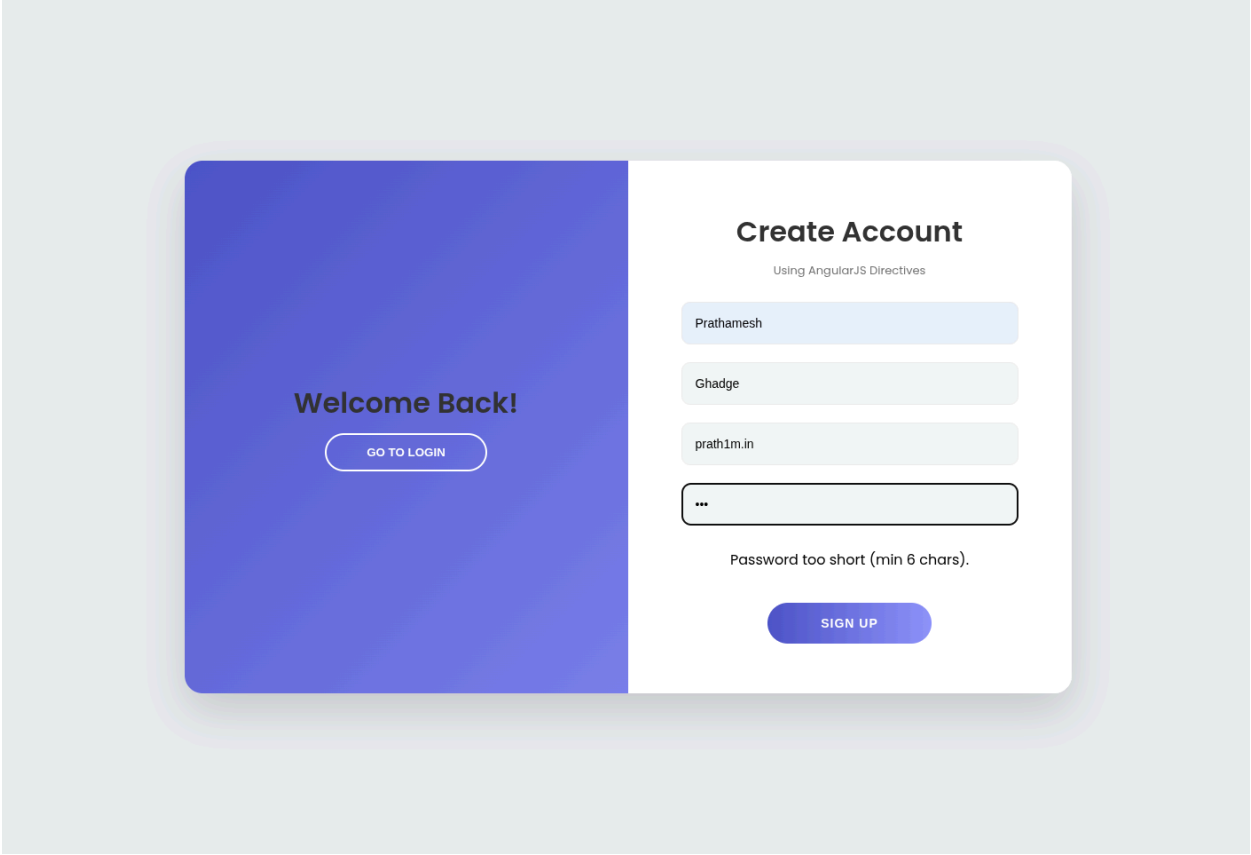

Sign In

Typing as: prath1m.in

SIGN IN

New Here?

GO TO REGISTER