

[< Back](#)

OPC UA Protocol: Features, Working Principle & MQTT Synergy



Neuron Team

Oct 13, 2023

Industrial IoT



Table of Contents


- [What is OPC UA Protocol](#)
- [The History of OPC UA Protocol](#)
- [Features of OPC UA Protocol](#)
- [Uses of OPC UA Protocol](#)
- [Information Model for OPC UA Protocol](#)
- [How the OPC UA Protocol Works](#)
- [Leveraging OPC UA Protocol with MQTT](#)
- [OPC UA over MQTT](#)
- [Bridging OPC UA Protocol to MQTT with](#)

What is OPC UA Protocol

OPC UA (OPC Unified Architecture) is a platform-independent, service-oriented, open, and secure communication architecture. It is designed to enable interoperability of industrial automation devices, systems, and software applications from different vendors. The OPC UA information model defines the codes and formats for exchanging data using various transport protocols.

OPC UA and its predecessor, Open Platform Communications (OPC), were developed by the same foundation but significantly different. The foundation continues to develop OPC UA in order to create an architecture that is more desirable than the original OPC communications and more in line with the needs of evolving industrial automation.

The History of OPC UA Protocol

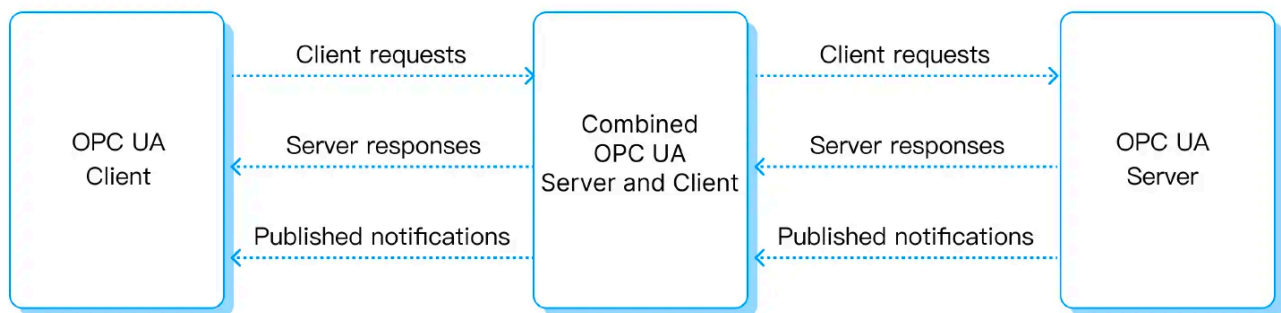

Prior to the release of the OPC UA specification, industry vendors, end-users, and software developers had worked together to develop a set of specifications for defining industrial process data, alarms, and historical data. This set of specifications is known as OPC Classic and was first released in 1995, based on the COM/DCOM technology stack for Microsoft Windows. It includes the following three parts:

1. OPC Data Access is best known as OPC DA. The OPC DA specification defines the exchange of data, including value, time and quality information.
2. OPC Alarms & Events, or OPC A&E, the OPC A&E specification defines the exchange of alarm and event type message information.
3. OPC Historical Data Access i.e. OPC HDA. The OPC HDA specification defines the exchange of historical data. OPC HDA can be applied to querying and analyzing historical data.

OPC Classic is known for its excellent performance and reliability. It has been a cornerstone of industrial automation for many years, and its advancements in technology and change management have been widely recognized.

needs of people. To address this issue, the OPC Foundation introduced OPC UA in 2006. This new technology provides cross-platform data transfer, improved data security, and better handling of large data volumes. OPC UA integrates all of the functionality of the existing OPC Classic specification while addressing the problems that existed with OPC Classic.

As of today, the latest version of OPC UA is 1.05. In addition to the Client-Server (Subscriptions) model, OPC UA includes a Pub-Sub mechanism, which allows pushing JSON specifications (also using the standard-defined binary specification - UADP) over the UDP protocol, [MQTT protocol](#), or [AMQP protocol](#).

Features of OPC UA Protocol

Functional equivalence: All OPC Classic specifications map to the UA, and the OPC UA includes the DA, A&E and HDA functionality found in OPC Classic:

Functionality	Descriptions
Discovery	Find available OPC servers on your local PC and/or network
Address space	All data is represented hierarchically (e.g. files and folders), allowing OPC clients to discover, utilise simple and complex data structures
On-demand	Read and write data/information based on access rights
Subscription	Monitor data/information and report exceptions when values change beyond the client's settings
Event	Client-based settings notify important information
Method	Clients can execute programs based on methods defined on the server, etc.

Platform Independence: From embedded microcontrollers to cloud-based infrastructure, OPC UA is not dependent on the Windows platform and can be deployed for use on any platform


Security: Message encryption, authentication and other security considerations for an organization when connecting to OPC UA addresses security by providing a set of c



Functionality	Descriptions
Transport	A number of protocols are defined, providing options such as ultra-fast OPC binary transfers or the more general SOAP-HTTPS
Session encryption	Information is transmitted securely with 128-bit or 256-bit encryption levels
Message Signature	The signature must be identical when the message is received as when it is sent.
Sequencing Data Packages	Identified message replay attacks eliminated through sequencing
Authenticate	Each UA client and server is identified by an OpenSSL certificate, which provides control over how applications and systems connect to each other.
User control	Applications can require user authentication (login credentials, certificates, etc.) and can further restrict or enhance user access to permissions and address space "views".
Audits	Logging of user and/or system activity to provide an access audit trail

Extensibility: OPC UA's multi-tier architecture allows for the incorporation of innovative technologies and approaches, such as new transport protocols, security algorithms, coding standards, and application services, without affecting existing applications. This ability to add new functionalities makes OPC UA a "future-proof" framework. In the meantime, OPC UA maintains compatibility with existing products. This means that today's UA products can interoperate with future UA products.

Comprehensive Information Modelling: Used to define complex information, the OPC UA Information Modelling Framework converts data into information, allowing even the most complex multi-level structures to be modeled and extended through fully object-oriented functionality, with data types and structures that can be defined in configuration files.

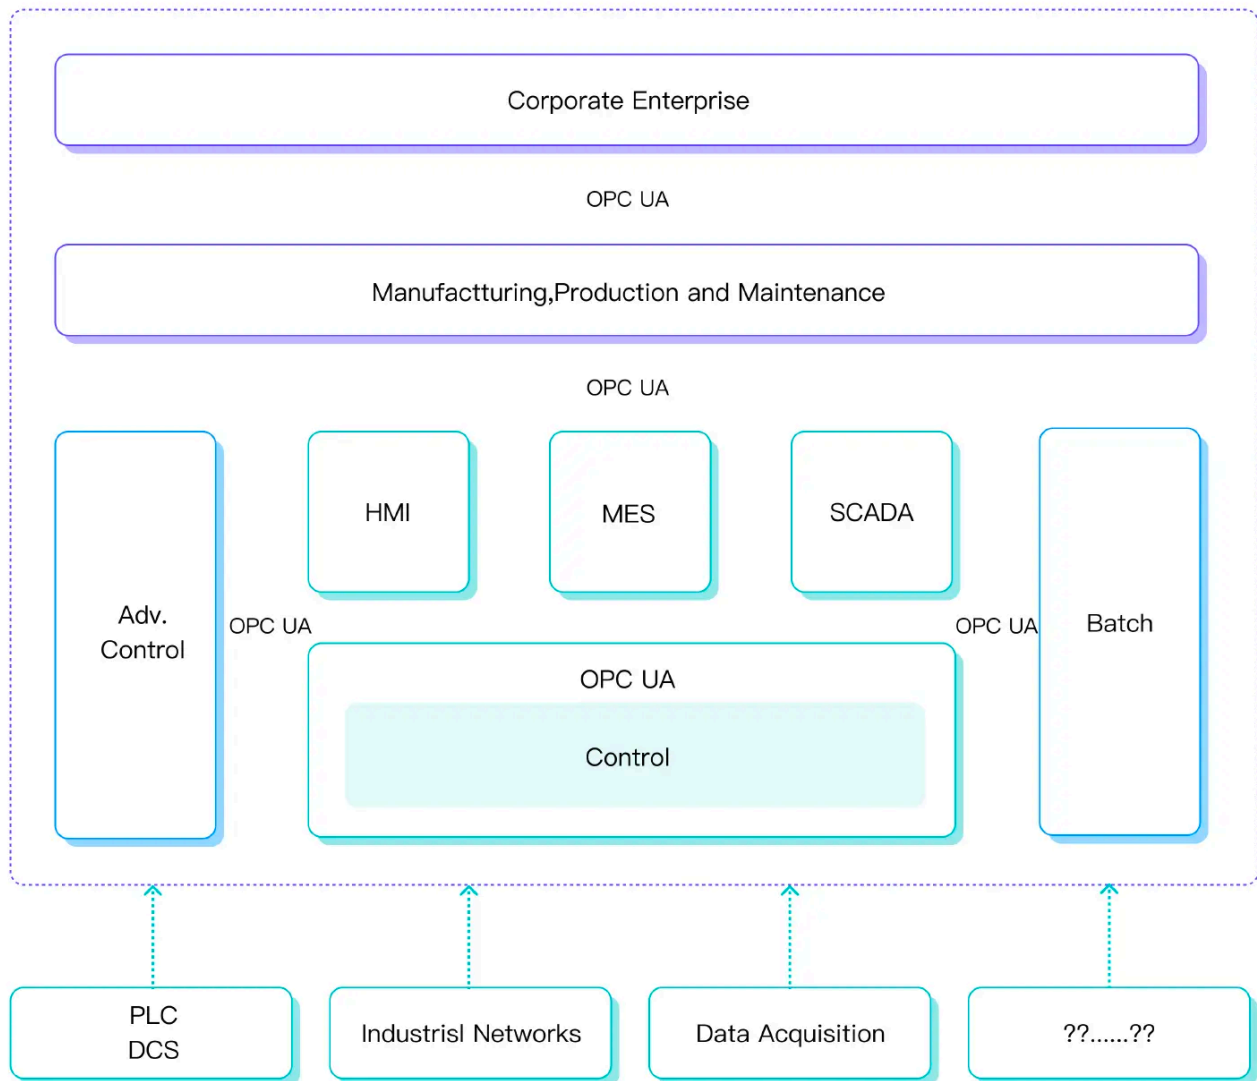

Uses of OPC UA Protocol

OPC UA has a wide range of applications in industrial automation and IoT, bringing many benefits to different industries, including data collection, device integration, remote monitoring, historical data access, and more.

Manufacturing

- Data collection and monitoring: Equipment in manufacturing industry can easily collect data through OPC UA and optimize productivity.
- Device Integration and Interoperability: Different industrial devices can be seamlessly integrated, from sensors to actuators.

Building Automation

- **Intelligent Building Management:** OPC UA is used to connect building automation systems, including lighting, air conditioning, and security systems, to achieve intelligent energy management and equipment control.
- **Equipment Monitoring and Maintenance:** Condition monitoring and maintenance of building equipment can be realized through OPC UA to improve equipment reliability and efficiency.

Oil and Gas

- **Remote Monitoring and Control:** Equipment in oilfields, pipelines and refineries can be remotely monitored and controlled via OPC UA, reducing manual intervention.
- **Data History:** OPC UA's historical data access feature is used to record equipment operating data for easy analysis and optimization.

Renewable Energy

- **Wind and Solar Farms:** OPC UA is used to monitor the operating status of wind and solar farms for remote control and troubleshooting.
- **Grid Management:** Renewable energy access and grid management require real-time data exchange, and OPC UA provides a reliable communication mechanism.

Utilities


- **Water Treatment and Water Supply System:** OPC UA is used to monitor water treatment equipment, pumping stations and water supply systems to ensure stable water quality and supply.
- **Power systems:** Monitoring, fault detection and remote operation of power equipment can be realized with OPC UA.

Information Model for OPC UA Protocol


The OPC UA information model is a network of objects and references, which is called the OPC UA Information Model. Objects are represented in a standard form - model elements, and their components are represented in a standard form - model elements. Objects are described by attributes and connected by references between nodes and references between nodes.

Object Model

OPC UA uses objects as the basis for representing data and activities in the process system. Objects contain variables, events and methods that are interconnected by reference.

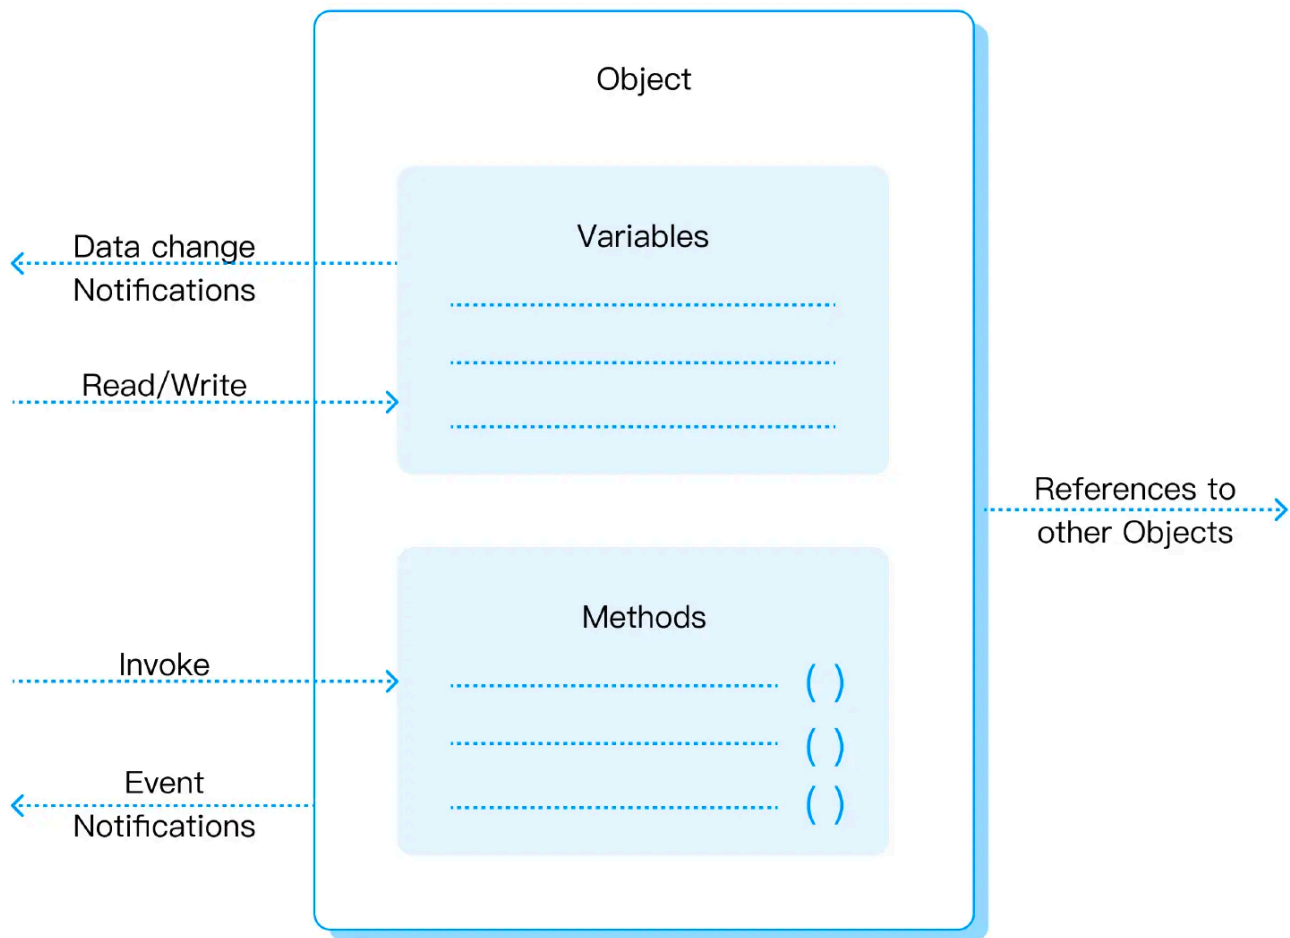

Node Model

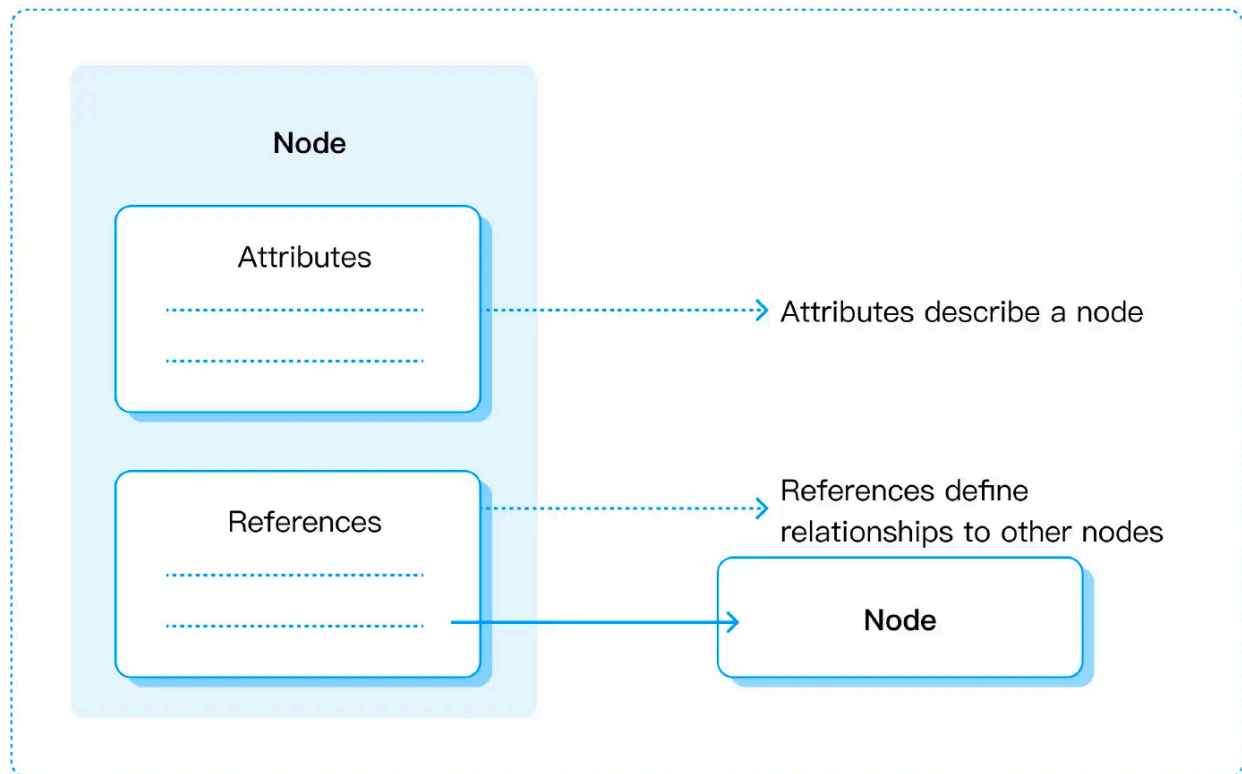


- Attributes are used to describe nodes, and different node classes have different attributes (sets of attributes). The definition of a node class includes the definition of attributes, so attributes are not included in the address space.
- A Reference represents a relationship between nodes. A reference is defined as an instance of a node of the reference type that exists in the address space.
- Generic properties of the node model

Name	Use	Data Type	Description
Attributes			
NodeId	M	NodeId	See 5.2.2
NodeClass	M	NodeClass	See 5.2.3
BrowseName	M	QualifiedName	See 5.2.4
DisplayName	M	LocalizedText	See 5.2.5
Description	O	LocalizedText	See 5.2.6
WhiteMask	O	AttributeWhiteMask	See 5.2.7
UserWriteMask	O	AttributeWriteMask	See 5.2.8
RolePermissions	O	RolePermissionsType[]	See 5.2.9
UserRolePermissions	O	RolePermissionsType[]	See 5.2.10
AccessRestrictions	O	AccessRestrictionsType	See 5.2.11
References			No References specified for this NodeClass

Reference Model

The node containing the reference is the source node and the referenced node is called the target node. The referenced target node can be in the same address space as the source node, or in the address space of another OPC server, or even the target node can be non-existent.

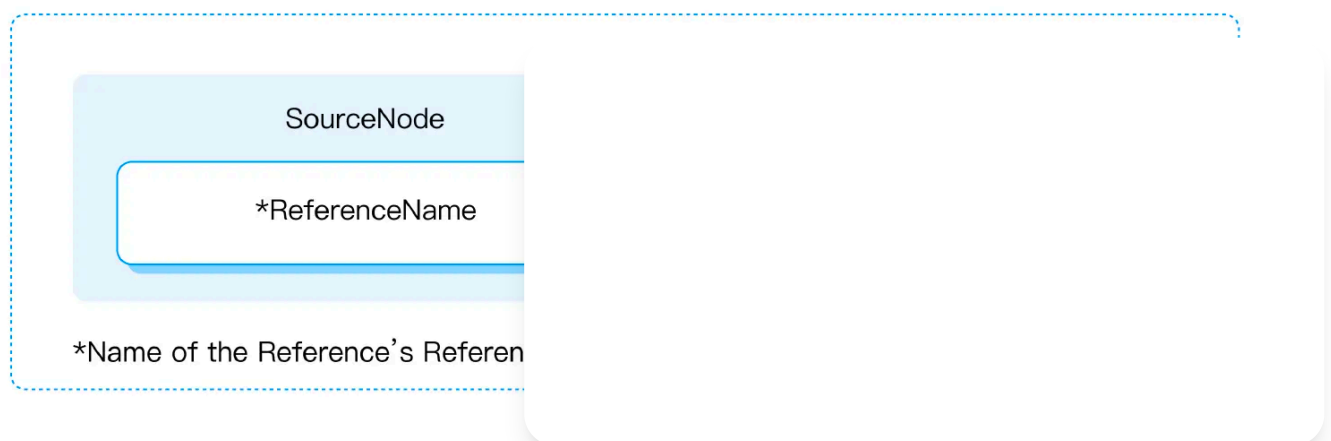


Node Types

The most important node categories in OPC UA are objects, variables and methods.

- **Object nodes:** Object nodes are used to form address spaces and do not contain data. They use variables to expose values for objects. Object nodes can be used to group management objects, variables or methods (variables and methods always belong to an object).
- **Variable node:** Variable node represents a value. The data type of the value depends on the variable. The client can read, write and subscribe to the value.
- **Method node:** The method node represents a method in the server that is called by the client and returns the result. The input parameters and the output result are in the form of variables as part of the method node. The client specifies the input parameters and gets the output result after the call.

How the OPC UA Protocol Works


Hardware providers support OPC UA in two ways: by embedding an OPC UA server in the device or offering software on a PC that obtains data through a private protocol and exposes it to other platforms via OPC UA. In some mid-range and high-end PLCs, there are OPC UA server integrations such as Siemens S71200/1500, while Siemens also provides software like WINCC to indirectly provide data from other devices to third parties through OPC/OPC UA.

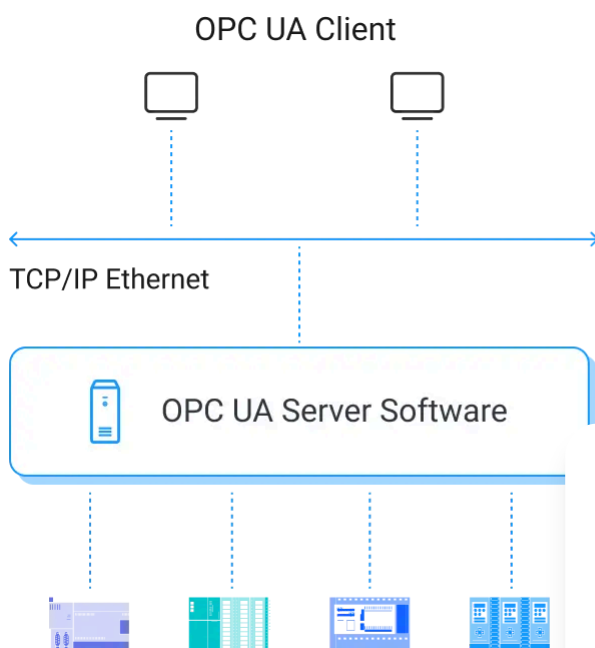


After the data is exposed through the OPC UA server, the client can access the data in the modes specified by the OPC UA protocol: the request/response mode and the

Publish/Subscribe mode. To begin, the client must establish a connection to the server, which will create a session channel between the client and server.

In request/response mode, the client application can request some standard services from the server through the session channel, such as: reading raw data from the node, writing data to the node, invoking remote methods, and so on.

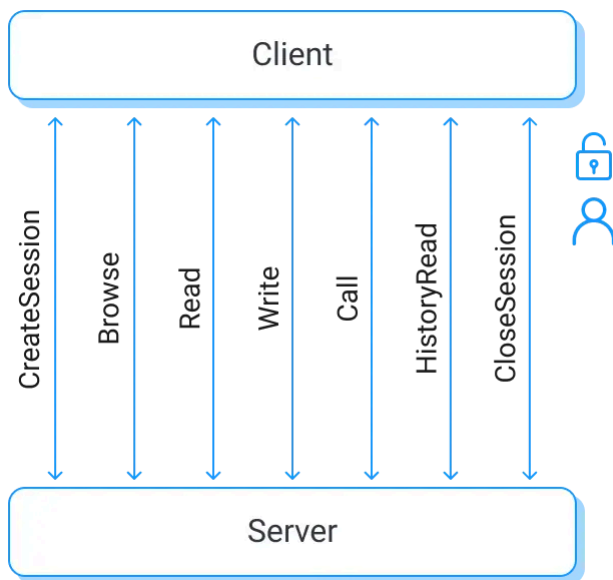

In publish/subscribe mode, each client can create any number of server subscriptions, and when the server's node data changes, notification messages are instantly pushed to the client.

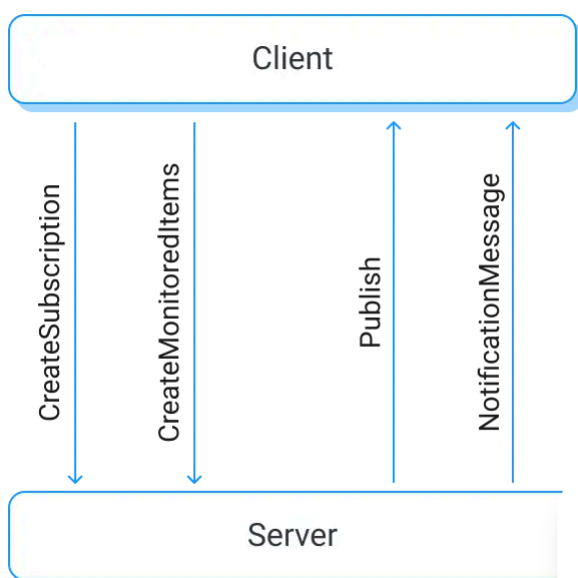

Generally, end users don't have to worry about the server address. The main concerns are the OPC UA server address, the address where they can access the data.

OPC UA Server Endpoint

Protocol	Url
OPC UA TCP	<code>opc.tcp://localhost:4840/UADiscovery</code>
OPC UA Websockets	<code>opc.wss://localhost:443/UADiscovery</code>
OPC UA HTTPS	<code>https://localhost:443/UADiscovery</code>

User Authentication Method

- 1. Anonymous
- 2. Username & Password
- 3. Certificate

Security Modes

- 1. None
- 2. Sign
- 3. Sign & Encrypt

Security Policies

- 1. Basic128Rsa15
- 2. Basic256
- 3. Basic256Sha256
- 4. Aes128Sha256RsaOaep
- 5. Aes256Sha256RsaPass

Node Address

Address type
Byte string
GUID



Address type	Address
Int	ns=x;i=x
String	ns=x;s=

Leveraging OPC UA Protocol with MQTT

MQTT (Message Queuing Telemetry Transport) is a messaging protocol designed for IoT devices and applications that uses a publish-and-subscribe model and has the advantages of being lightweight, efficient, reliable, and supporting real-time communication. MQTT is well suited for resource-constrained environments, especially scenarios requiring efficient power and bandwidth use.

The industry has built an **industrial IoT** data specification called SparkplugB on top of MQTT 3.1.1, which provides basic data unified modeling capabilities while ensuring flexibility and efficiency. Thanks to the excellent design of the MQTT protocol, SparkPlugB provides good network state awareness and is able to provide strong interoperability for devices and systems.


OPC UA and MQTT have a certain degree of functionality overlap, but their use of scenarios is very different:

- OPC UA is a communication protocol used in industrial scenarios to enable different equipment and systems from various manufacturers to communicate seamlessly using a standardized language.
- MQTT is an IoT protocol designed for Internet-based data transmission of sensors, catering to low bandwidth and unreliable network conditions while efficiently handling continuous real-time data. Its read/publish mechanism offers remarkable flexibility in usage.

In industrial scenarios, MQTT excels at messaging in distributed systems, while OPC UA focuses on providing interoperability. By combining the two, business data can be abstracted and aggregated using OPC UA, and MQTT can be used for data transmission in a more efficient manner, leveraging its strong connectivity.

OPC UA over MQTT

The Pub-Sub model proposed by the OPC Foundation in the latest specification of OPC UA allows data changes to be pushed to subscribers using the **MQTT Broker**.

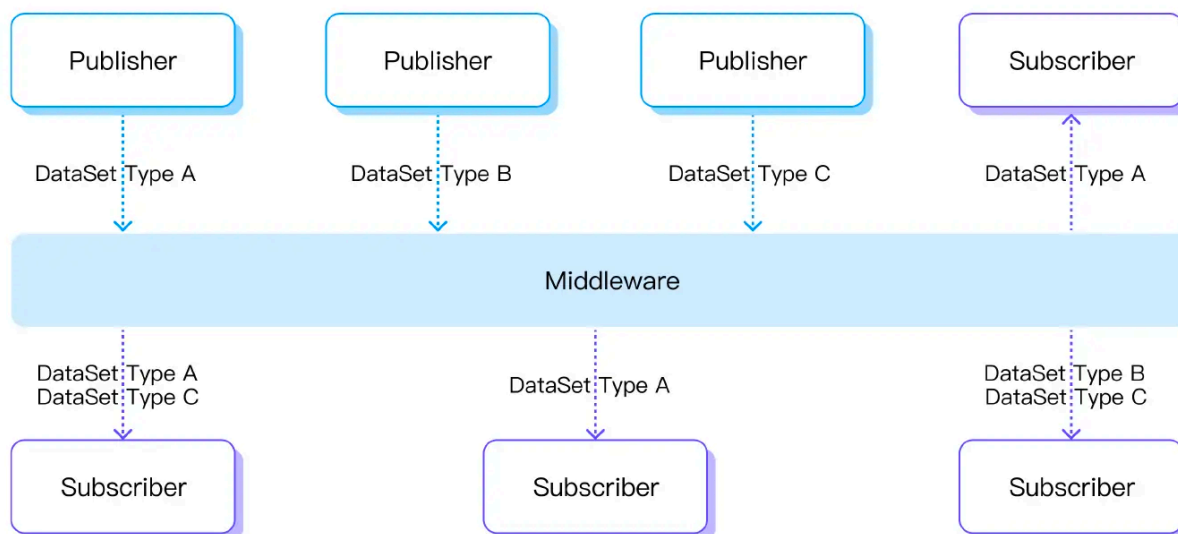

Pub-Sub security is a bit more complex than that in client/server, and the specification is not as detailed. In an MQTT network, security is based on SSL/TLS, and the broker can define application-level authentication in addition to enabling SSL/TLS for transport. In principle, these security models are either all or nothing for every subscriber and publisher that can join the network. The new OPC UA standardization is still a work in progress, and it is not yet clear how the rich OPC UA information model can best be mapped to MQTT.

Bridging OPC UA Protocol to MQTT with EMQX and Neuron

Neuron is a modern industrial IoT connectivity server that can connect to a wide range of industrial devices using standard or device-proprietary protocols, enabling the interconnection of **industrial IoT platforms** with massive devices. As a lightweight industrial protocol gateway software, Neuron is designed to operate on various IoT edge hardware devices with limited resources. Its primary goal is to address the challenge of accessing data from data-centric automation equipment in a unified smart manufacturing.

EMQX is a distributed **open-source MQTT** server, EMQX provides efficient and reliable enabling high-performance, real-time moving streams, helping users rapidly build business

OPC UA data sources can be captured and aggregated by Neuron's southbound OPC UA driver, converted to the MQTT protocol, and transmitted to the EMQX MQTT Broker. The latter then distributes them to various distributed applications.

Learn more about OPC UA to MQTT bridging through this step-by-step guide: [Bridging OPC UA Data to MQTT for IIoT: A Step-by-Step Tutorial](#)

Talk to an Expert

Contact Us →

OPC UA

♡ Like ✎ Edit 💬 Feedback

Share



Article By



Neuron Team

The Neuron team is dedicated to accelerating connectivity and simplifying management of industrial IoT by offering powerful industrial protocol gateway software.

Subscribe to our blogs

Your email address

Related Posts

Jun 28, 2023

EMQX Team

What Is MQTT and Why Is It the Best Protocol for IoT?

MQTT is a lightweight publish/subscribe messaging protocol that provides reliable messaging services to IoT devices with minimal code and bandwidth.

Apr 12, 2024

Neuron Team

OPC UA vs. OPC DA: Differences and Which to Choose

This article will provide a comprehensive guide on OPC DA and OPC UA to help readers make wise choices based on specific industrial needs, thus reducing unnecessary costs...

May 30, 2023

Joey

A Comparison of IIoT Protocols: MQTT Sparkplug vs OPC-UA

We'll compare MQTT Sparkplug, OPC UA, and their successors to help you understand which IIoT protocol fits your needs.

