

100



FEATURES SUMMARY -- 2 --

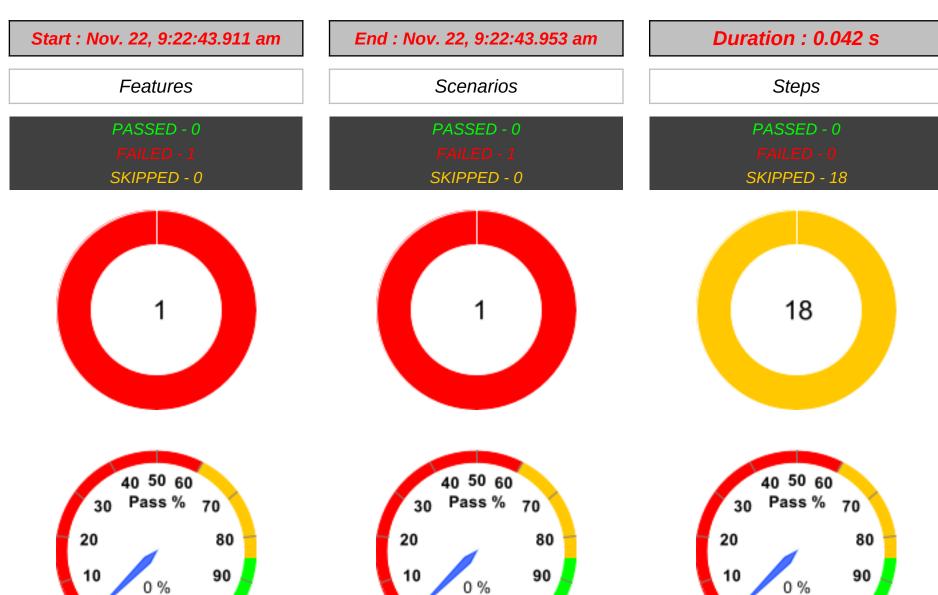

| # | Feature Name   | T | P | F | S | Duration |
|---|--|---|---|---|---|----------|
| 1 | This feature will allow you to create checklist for PC1 application. | 1 | 0 | 1 | 0 | 0.042 s  |

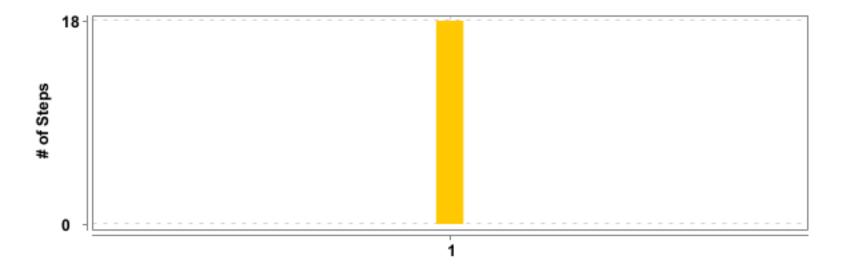

| # | Feature Name                          | Scenario Name                           | T  | P | F | S  | Duration |
|---|---------------------------------------|---|----|---|---|----|----------|
| 1 | This feature will allow you to create | Successful Login with Valid Credentials | 18 | 0 | 0 | 18 | 0.040 s  |
|   | checklist for PC1 applicaiton.        |   |    |   |   |    |          |

**DETAILED SECTION** 

## (F)- This feature will allow you to create checklist for PC1 application.

| FAILED           | DURATION - 0.042 s    | Scenarios |   | Steps      |    |
|------------------|-----------------------|-----------|---|------------|----|
|                  |                       | Total - 1 |   | Total - 18 |    |
| / 9:22:43.911 am | n // 9:22:43.953 am / | Pass - 0  | 1 | Pass - 0   | 18 |
|                  |                       | Fail - 1  |   | Fail - 0   |    |
|                  |                       | Skip - 0  |   | Skip - 18  |    |

## (S)- Successful Login with Valid Credentials

| 0.15 | 5   |       |     |       |     |     |     |     |     |     |     | 1   |     | ,   | ,        |                  | Steps                |   |   |  |
|------|-----|-------|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|------------------|----------------------|---|---|--|
| 0.1  | -   |       |     |       |     |     |     |     |     |     |     |     |     |     |          |                  | Total - 18           |   |   |  |
| .05  | -   |       |     |       |     |     |     |     |     |     |     |     |     |     |          | - <del> </del> - | Pass - 0<br>Fail - 0 |   | 18  |  |
| 0    | 1   | +     |     |       |     |     | -   |     |     | _   | +   |     | +   |     | <u> </u> |                  | Skip - 18            | _   |   |  |
|      | 0.1 | 0.1 - | 0.1 | 0.1 - | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 | 0.1      | 0.1              | 0.1                  | Total - 18  Pass - 0  Fail - 0  Skip - 18 | 0.1 - 0.5 - | 0.1 - 0.5 - Total - 18 Pass - 0 Fail - 0 Skip - 18 |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | BEFORE - AppHooks.Hooks.getProperty()   | FAILED | 0.004 s  |
|   | java.lang.NoClassDefFoundError: com/qa/util/ConfigReader  |        |          |
|   | at AppHooks.Hooks.getProperty(Hooks.java:31)  |        |          |
|   | Caused by: java.lang.ClassNotFoundException: com.qa.util.ConfigReader                                       |        |          |
|   | at java.base/jdk.internal.loader.BuiltinClassLoader.loadClass(BuiltinClassLoader.java:581)                  |        |          |
|   | at java.base/jdk.internal.loader.ClassLoaders\$AppClassLoader.loadClass(ClassLoaders.java:178)              |        |          |
|   | at java.base/java.lang.ClassLoader.loadClass(ClassLoader.java:521)  |        |          |
|   | at AppHooks.Hooks.getProperty(Hooks.java:31)  |        |          |
|   | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)                           |        |          |
|   | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)         |        |          |
|   | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) |        |          |
|   | at java.base/java.lang.reflect.Method.invoke(Method.java:566)   |        |          |
|   | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)   |        |          |
|   | at io.cucumber.java.Invoker.invoke(Invoker.java:24)   |        |          |
|   | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)                     |        |          |
|   | at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59)                                  |        |          |
|   | at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)                           |        |          |
|   | at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)                         |        |          |
|   | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)                                  |        |          |

| # | Step / Hook Details  | Status  | Duration |
|---|--|---------|----------|
|   | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)  |         |          |
|   | at io.cucumber.core.runner.TestStep.run(TestStep.java:64)  |         |          |
|   | at io.cucumber.core.runner.TestCase.run(TestCase.java:98)  |         |          |
|   | at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)  |         |          |
|   | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)   |         |          |
|   | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)  |         |          |
|   | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27)   |         |          |
|   | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  |         |          |
|   | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  |         |          |
|   | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)   |         |          |
|   | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  |         |          |
|   | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)   |         |          |
|   | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)   |         |          |
|   | at org.junit.runners.ParentRunner.run(ParentRunner.java:413)   |         |          |
|   | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199)  |         |          |
|   | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90)   |         |          |
|   | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  |         |          |
|   | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  |         |          |
|   | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)   |         |          |
|   | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  |         |          |
|   | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)   |         |          |
|   | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234)   |         |          |
|   | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)   |         |          |
|   | at org.junit.runners.ParentRunner.run(ParentRunner.java:413)   |         |          |
|   | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)   |         |          |
|   | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)  |         |          |
|   | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)  |         |          |
|   | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)  |         |          |
|   | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) |         |          |
|   |  |         | 0.000    |
|   | BEFORE - AppHooks.Hooks.launchBrowser()  | FAILED  | 0.000 s  |
|   | java.lang.NullPointerException   |         |          |
|   | at AppHooks.Hooks.launchBrowser(Hooks.java:39)   |         |          |
| 1 | Given - Given I enter valid username as "sanprathi@gmail.com" and password as "Vimalprabhu-202310"   | SKIPPED | 0.001 s  |
| 2 | When - When I click login  | SKIPPED | 0.001 s  |
| 3 | Then - Then user is logged in Successfully   | SKIPPED | 0.000 s  |
| 4 | Given - Given I click Start renewal/passport   | SKIPPED | 0.000 s  |
| 5 | And - And I read test data for testcase for "PC1_CitizenshipCertificate"   | SKIPPED | 0.000 s  |
| 6 | When - When I select that I am completing the application for "Myself"   | SKIPPED | 0.001 s  |
| 7 | And - And I enter personal details   | SKIPPED | 0.000 s  |

DETAILED SECTION -- 6 --

| #  | Step / Hook Details   | Status  | Duration |
|----|---|---------|----------|
| 8  | And - And I enter contact details   | SKIPPED | 0.000 s  |
| 9  | And - And I enter previous passport details   | SKIPPED | 0.000 s  |
| 10 | And - And I choose Do you have Australian Birth Certificate as "No"                   | SKIPPED | 0.001 s  |
| 11 | And - And I choose Do you have an Austraial Citizenship Certificate as "Yes"          | SKIPPED | 0.000 s  |
| 12 | And - And I enter Citizenshipdetails  | SKIPPED | 0.001 s  |
| 13 | And - And I confirm Identity  | SKIPPED | 0.000 s  |
| 14 | And - And I confirm Referee details   | SKIPPED | 0.001 s  |
| 15 | And - And I enter Emergency contact details   | SKIPPED | 0.000 s  |
| 16 | And - And I confirm Passport fees   | SKIPPED | 0.000 s  |
| 17 | And - And I review application and click Next   | SKIPPED | 0.001 s  |
| 18 | Then - Then I can confirm that PC1 applicaiton is launched successfully               | SKIPPED | 0.000 s  |
|    | AFTER - AppHooks.Hooks.teardown(io.cucumber.java.Scenario)                            | FAILED  | 0.003 s  |
|    | java.lang.NullPointerException<br>at AppHooks.Hooks.teardown(Hooks.java:89)           |         |          |
|    | AFTER - AppHooks.Hooks.teardownandScreenshot(io.cucumber.java.Scenario)               | FAILED  | 0.000 s  |
|    | java.lang.NullPointerException at AppHooks.Hooks.teardownandScreenshot(Hooks.java:78) |         |          |