


11 .Multithreading:

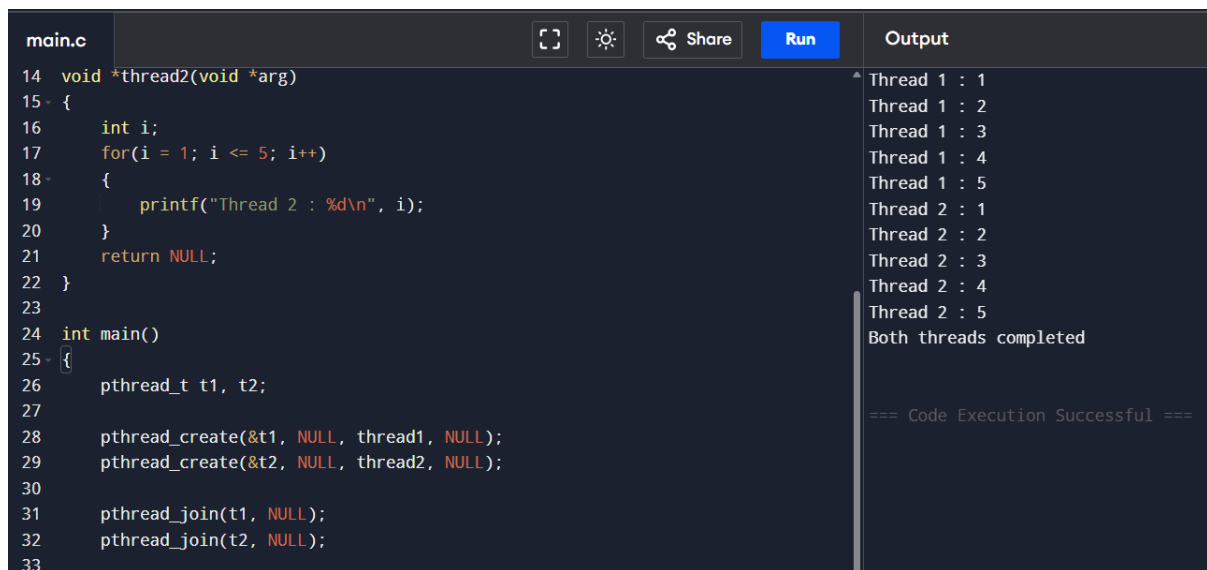

The screenshot shows a C code editor with a file named `main.c`. The code defines two threads, `thread1` and `thread2`, which both print their IDs from 1 to 5. The `main` function creates both threads and joins them before exiting. The output panel on the right shows the execution results, indicating that both threads completed successfully.

```
main.c
14 void *thread2(void *arg)
15 {
16     int i;
17     for(i = 1; i <= 5; i++)
18     {
19         printf("Thread 2 : %d\n", i);
20     }
21     return NULL;
22 }
23
24 int main()
25 {
26     pthread_t t1, t2;
27
28     pthread_create(&t1, NULL, thread1, NULL);
29     pthread_create(&t2, NULL, thread2, NULL);
30
31     pthread_join(t1, NULL);
32     pthread_join(t2, NULL);
33 }
```

Output

```
Thread 1 : 1
Thread 1 : 2
Thread 1 : 3
Thread 1 : 4
Thread 1 : 5
Thread 2 : 1
Thread 2 : 2
Thread 2 : 3
Thread 2 : 4
Thread 2 : 5
Both threads completed

=== Code Execution Successful ===
```