


17. Bankers Problem:

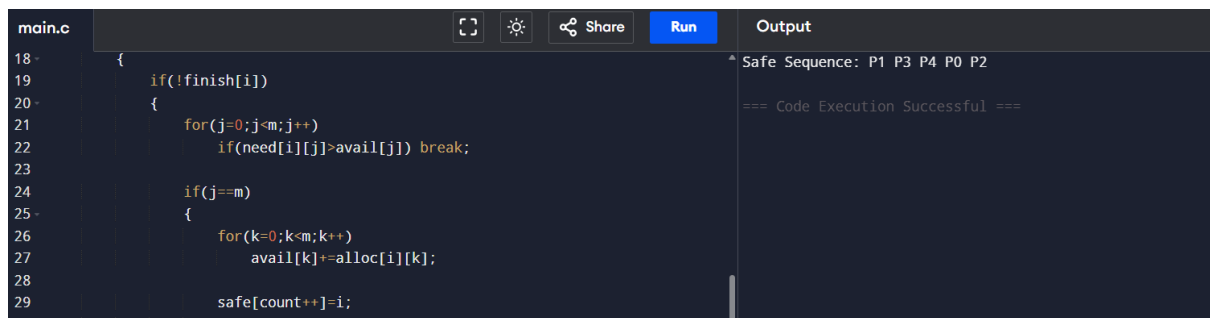

```
main.c  [Icons]  Share  Run  Output
18 {
19     if(!finish[i])
20     {
21         for(j=0;j<m;j++)
22             if(need[i][j]>avail[j]) break;
23
24         if(j==m)
25         {
26             for(k=0;k<m;k++)
27                 avail[k]+=alloc[i][k];
28
29             safe[count++]=i;
30             finish[i]=1;
31         }
32     }
33 }
```

Safe Sequence: P1 P3 P4 P0 P2
=== Code Execution Successful ===