


1. Create a new process and display Process ID (PID) and Parent Process ID (PPID):

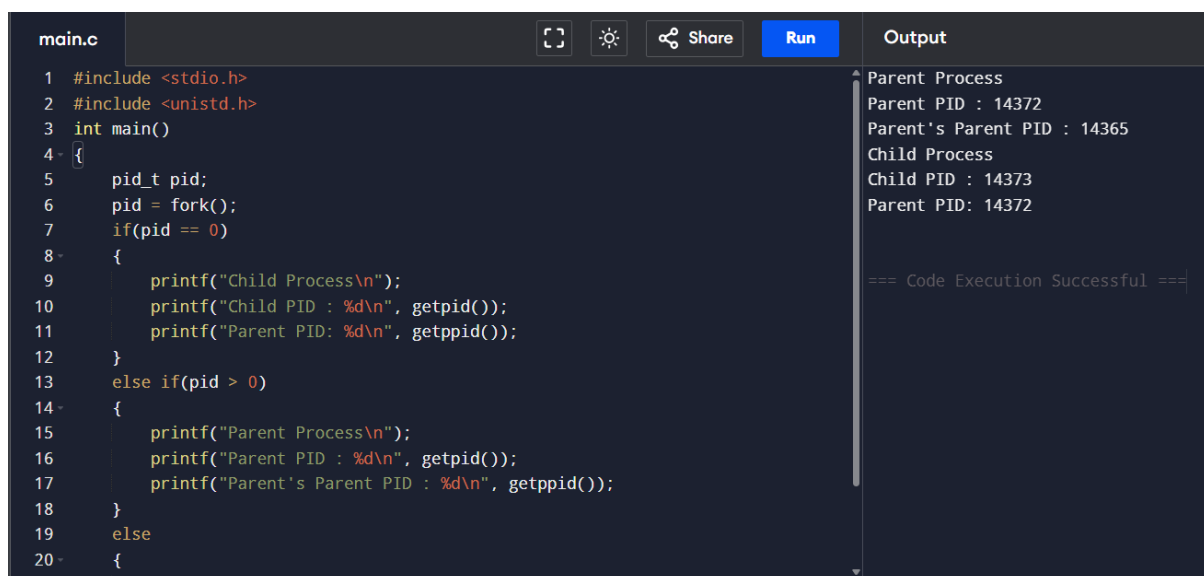

```
main.c  [Icons]  Run  Output
1  #include <stdio.h>
2  #include <unistd.h>
3  int main()
4  {
5      pid_t pid;
6      pid = fork();
7      if(pid == 0)
8      {
9          printf("Child Process\n");
10         printf("Child PID : %d\n", getpid());
11         printf("Parent PID: %d\n", getppid());
12     }
13     else if(pid > 0)
14     {
15         printf("Parent Process\n");
16         printf("Parent PID : %d\n", getpid());
17         printf("Parent's Parent PID : %d\n", getppid());
18     }
19     else
20     {
```

Output

```
Parent Process
Parent PID : 14372
Parent's Parent PID : 14365
Child Process
Child PID : 14373
Parent PID: 14372

=== Code Execution Successful ===
```