Program 3: Working with Selenium: Maven Project To Connect To Web Servers Using Selenium Dependency

1. **Sauce.demo webpage**

Step 1: create a maven project on terminal by typing the command **mvn archetype:generate - DgroupId=com.example - DartifactId=MyMavenSeleniumApp01 - DarchetypeArtifactId=maven-archetype-quickstart -DinteractiveMode=false**

```
vboxuser@prathwish03:~/devops$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenSeleniumApp01 -DarchetypeArtifactId=maven-archetype
start -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/vboxuser/devops
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenSeleniumApp01
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/vboxuser/devops/MyMavenSeleniumApp01
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  3.164 s
[INFO] Finished at: 2026-03-21T11:33:28+05:30
[INFO] ------------------------------------------------------------------------
```

Step 2: Before we connect to web servers we need to have chrome driver installed. To download chrome driver

To check the chrome version type the command **google-chrome –version** in the terminal extract the version and store it in a variable CHROME_VERSION

extracts and transorms JSON data

LATEST_DRIVER=$(curl -s "https://googlechromelabs.github.io/chrome-for-testing/latest- patch-versions-per-build.json" | jq -r ".builds[\"$CHROME_VERSION\"].version")

do install curl using the command sudo apt install curl

wget https://storage.googleapis.com/chrome-for-testing-public/$LATEST_DRIVER/linux64/chromedriver-linux64.zip

Extract and move it to /usr/local/bin/:

unzip chromedriver-linux64.zip

sudo mv chromedriver-linux64/chromedriver

/usr/local/bin/chromedriver sudo chmod +x
/usr/local/bin/chromedriver

```
vboxuser@prathwish03:~/devops$ chromedriver --version
ChromeDriver 145.0.7632.117 (de4e5d6e13b995f5e04137970c0e8ec456017467-refs/branch-heads/7632@{#3101})
vboxuser@prathwish03:~/devops$
```

Check if ChromeDriver is installed correctly:
Step 3 : edit the pom.xml file and add the
dependencies The pom.xml has the code

```
<project
xmlns="http://maven.apache.org/POM/4.0.0"xmlns:xsi="http://www.w3.org/2001/XML
Schema-instance" xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/maven- v4_0_0.xsd">
  <modelVersion>4.0.0</modelVersion>
  <groupId>com.example</groupId>
  <artifactId>MyMavenSeleniumApp01</artifactId>
  <packaging>jar</packagi<ng>
  <version>1.0-SNAPSHOT</version>
  <name>MyMavenSeleniumApp01</name>
  <url>http://maven.apache.org</url>
  <dependencies>
    <dependency>
      <groupId>junit</groupId>
      <artifactId>junit</artifactId>
      <version>3.8.1</version>
      <scope>test</scope>
    </dependency>
  <!--  https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-java  -->
<dependency>
    <groupId>org.seleniumhq.selenium</groupId>
    <artifactId>selenium-java</artifactId>
    <version>4.29.0</version>
</dependency>
  </dependencies>
  <!-- Build: Configuring plugins and build settings -->
<build>
<plugins>
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
```

```
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.7</source>
<target>1.7</target>
</configuration>
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-jar-plugin</artifactId>
        <version>3.0.1</version>
       <configuration>
          <archive>
             <manifestEntries>
                <Main-Class>com.example.App</Main-Class>
             </manifestEntries>
          </archive>
        </configuration>

     </plugin>

</plugins>
</build>
</project>
```

Step 4: Edit the
App.java package
com.example;

```
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import org.openqa.selenium.chrome.ChromeDriver;
```

```
/**
 * Hello world!
 *
 */
public class App
{
   public static void main( String[] args )
   {
      WebDriver driver=new ChromeDriver();
      driver.get("https://www.saucedemo.com/");
      driver.manage().window().maximize();
      driver.findElement(By.id("user-
      name")).sendKeys("standard_user");
      driver.findElement(By.id("password")).sendKeys("secret_s
      auce"); driver.findElement(By.id("login-button")).click();
   }
}
```

Step 5:build and run the maven application Type **mvn clean install** in the terminal

```
vboxuser@prathwish03:~/devops/MyMavenSeleniumApp01$ mvn clean install
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< com.example:MyMavenSeleniumApp01 >------------------
[INFO] Building MyMavenSeleniumApp01 1.0-SNAPSHOT
[INFO] --------------------------------[ jar ]---------------------------------
[INFO]
[INFO] --- maven-clean-plugin:2.5:clean (default-clean) @ MyMavenSeleniumApp01 ---
[INFO]
[INFO] --- maven-resources-plugin:2.6:resources (default-resources) @ MyMavenSeleniumApp01 ---
[WARNING] Using platform encoding (UTF-8 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory /home/vboxuser/devops/MyMavenSeleniumApp01/src/main/resources
[INFO]
[INFO] --- maven-compiler-plugin:3.8.1:compile (default-compile) @ MyMavenSeleniumApp01 ---
[INFO] Changes detected - recompiling the module!
[WARNING] File encoding has not been set, using platform encoding UTF-8, i.e. build is platform dependent!
[INFO] Compiling 1 source file to /home/vboxuser/devops/MyMavenSeleniumApp01/target/classes
[INFO]
[INFO] --- maven-resources-plugin:2.6:testResources (default-testResources) @ MyMavenSeleniumApp01 ---
[WARNING] Using platform encoding (UTF-8 actually) to copy filtered resources, i.e. build is platform dependent!
[INFO] skip non existing resourceDirectory /home/vboxuser/devops/MyMavenSeleniumApp01/src/test/resources
[INFO]
[INFO] --- maven-compiler-plugin:3.8.1:testCompile (default-testCompile) @ MyMavenSeleniumApp01 ---
[INFO] Changes detected - recompiling the module!
[WARNING] File encoding has not been set, using platform encoding UTF-8, i.e. build is platform dependent!
[INFO] Compiling 1 source file to /home/vboxuser/devops/MyMavenSeleniumApp01/target/test-classes
[INFO]
[INFO] --- maven-surefire-plugin:2.22.2:test (default-test) @ MyMavenSeleniumApp01 ---
[INFO]
[INFO] -------------------------------------------------------
[INFO]  T E S T S
[INFO] -------------------------------------------------------
```

```
[INFO] Running com.example.AppTest
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 0.013 s - in com.example.AppTest
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 1, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO]
[INFO] --- maven-jar-plugin:3.0.1:jar (default-jar) @ MyMavenSeleniumApp01 ---
[INFO] Building jar: /home/vboxuser/devops/MyMavenSeleniumApp01/target/MyMavenSeleniumApp01-1.0-SNAPSHOT.jar
[INFO]
[INFO] --- maven-install-plugin:2.4:install (default-install) @ MyMavenSeleniumApp01 ---
[INFO] Installing /home/vboxuser/devops/MyMavenSeleniumApp01/target/MyMavenSeleniumApp01-1.0-SNAPSHOT.jar to /home/vboxuser/.m2/repository/com/exam
MavenSeleniumApp01/1.0-SNAPSHOT/MyMavenSeleniumApp01-1.0-SNAPSHOT.jar
[INFO] Installing /home/vboxuser/devops/MyMavenSeleniumApp01/pom.xml to /home/vboxuser/.m2/repository/com/example/MyMavenSeleniumApp01/1.0-SNAPSHOT
enSeleniumApp01-1.0-SNAPSHOT.pom
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  7.893 s
```

To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"** it opens saucedemo.com and we can login using the credentials

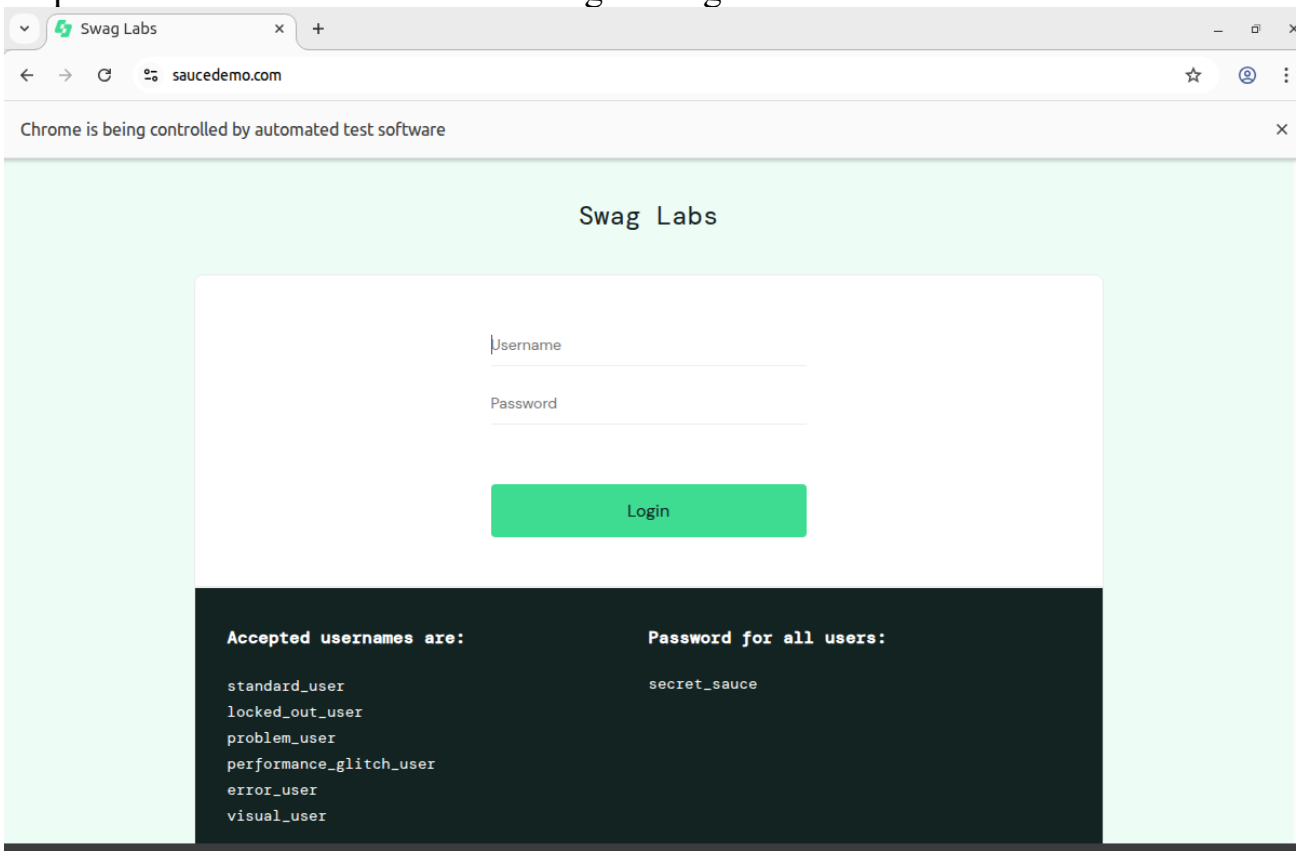

MyMavenSeleniumApp pipeline

Step 1: Create new file named "**Jenkinsfile**" inside MyMavenSeleniumApp01 folder and push into git

Jenkinsfile:

```
pipeline {
    agent any  // Use any available agent

    tools {
        maven 'Maven'  // Ensure this matches the name configured in Jenkins
    }
    stages {
        stage('Checkout') {
            steps {
                git branch: 'master', url: 'https://github.com/PrathwishShetty03/my_maven.git'
            }
        }
        stage('Build') {
            steps {
                sh 'mvn clean package'  // Run Maven build
            }
        }
        stage('Test') {
            steps {
                sh 'mvn test'  // Run unit tests
            }
        }
        stage('Run Application') {
            steps {
                // Start the JAR application
                sh 'java -jar target/MyMavenApp-1.0-SNAPSHOT.jar'
            }
        }
    }
    post {
        success {
            echo 'Build and deployment successful!'
        }
```

```
        failure {
            echo 'Build failed!'
        }
    }
}
```

Step 2:Open Jenkins Dashboard

- Open Jenkins in browser
- Click on New Item

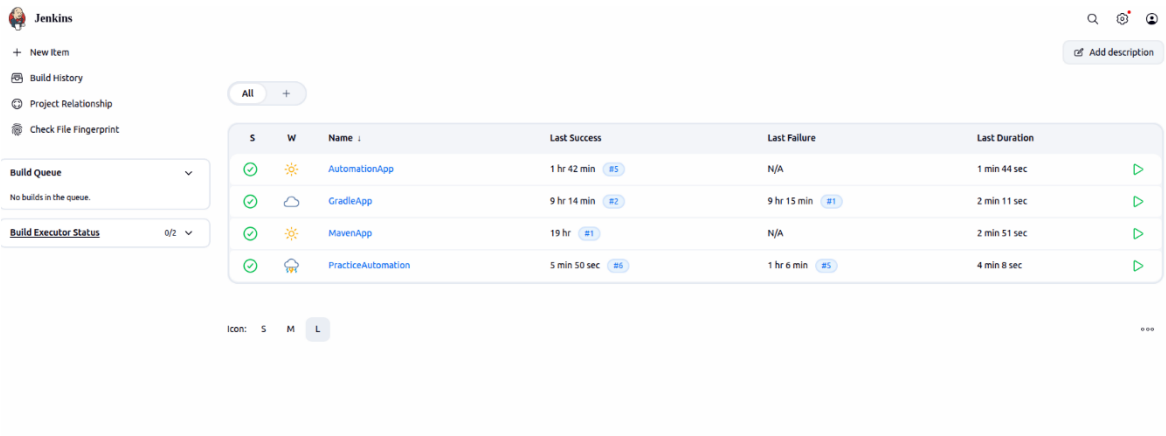

Step 3: Create Pipeline Job

- Enter name: **SaleniumApp**
- Select **Pipeline**
- Click **OK**

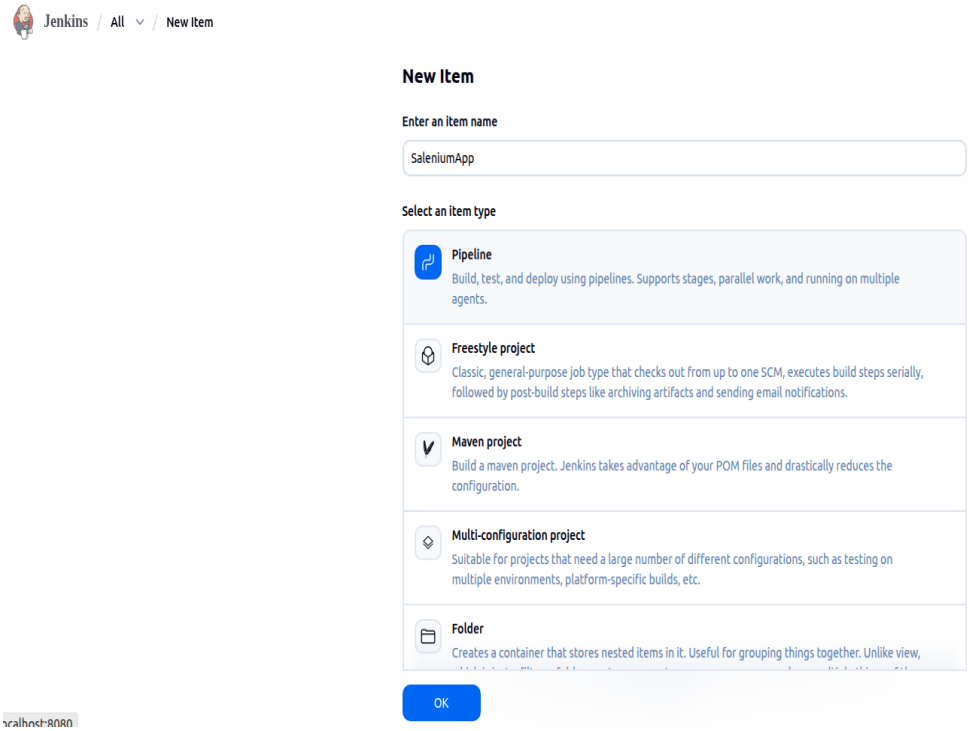

Step 4: Configure Pipeline with GitHub

- Select **Pipeline script from SCM**
- SCM → Git
- Enter repository URL
- Add credentials
- Click **Save**

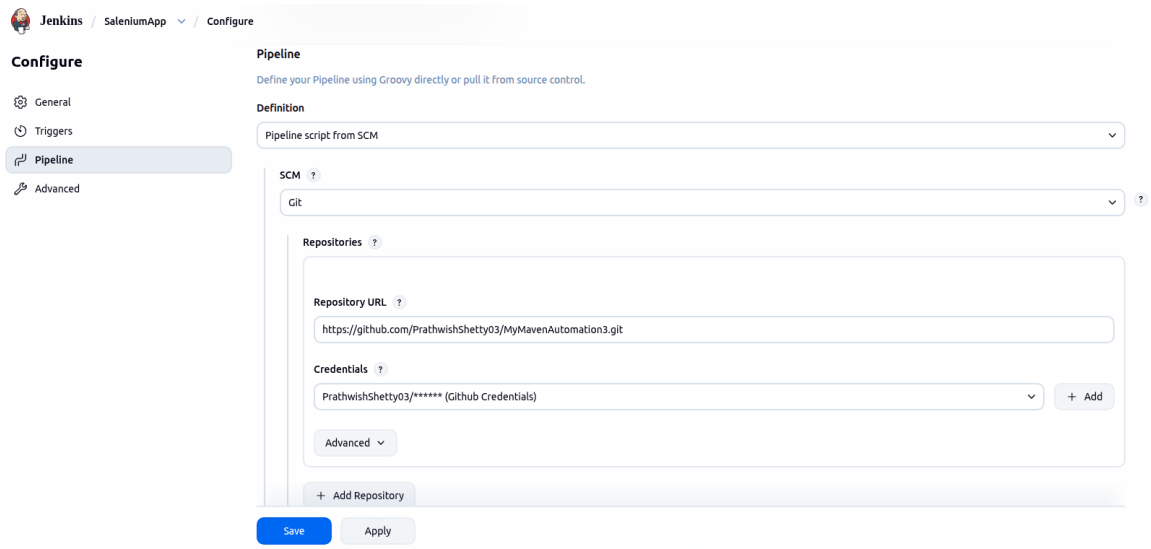

Step 5: Run the Pipeline

- Click **Build Now**

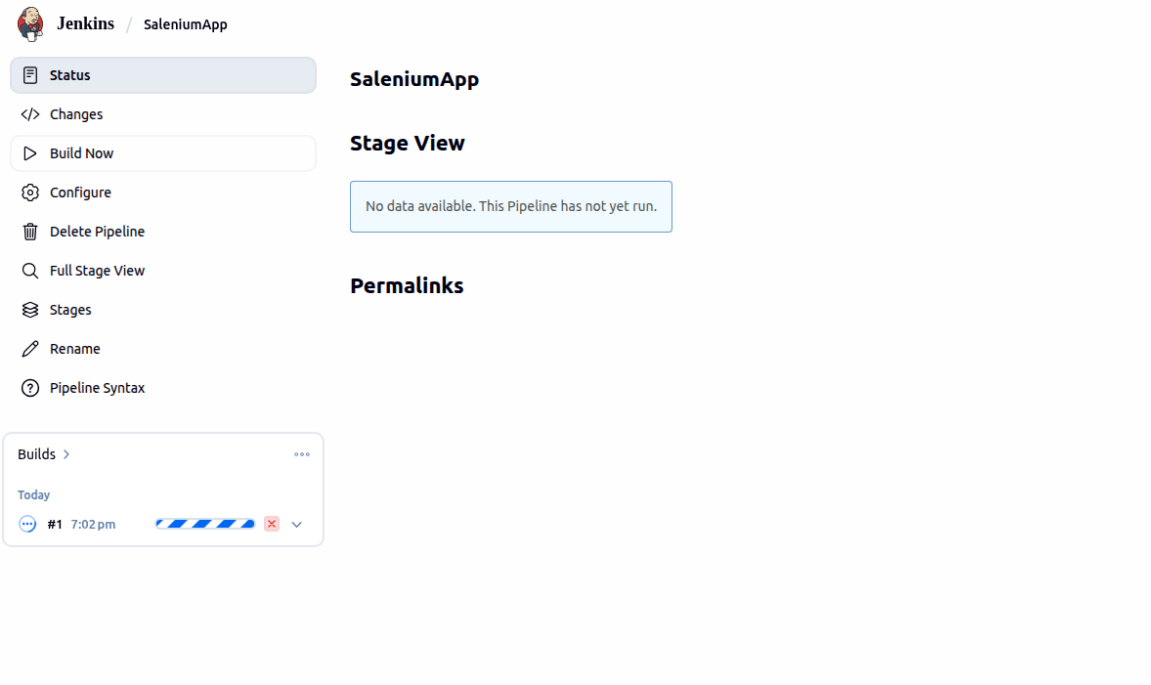

Step 6: Look for the status of project

- Check Stage View
- View Build History

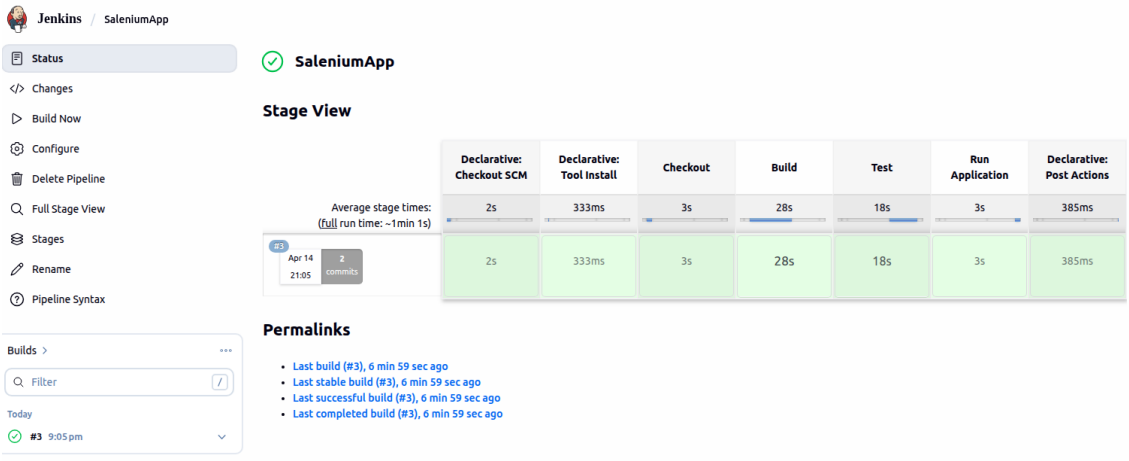

2.practiceautomation.com

Step 1: create a maven project on terminal by typing the command **mvn archetype:generate - DgroupId=com.example - DartifactId=MyMavenPracticeAutomation - DarchetypeArtifactId=maven-archetype-quickstart - DinteractiveMode=false**

```
vboxuser@prathwish03:~/devops$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenPracticeAutomation -DarchetypeArtifactId=maven-arch
quickstart -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/vboxuser/devops
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenPracticeAutomation
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/vboxuser/devops/MyMavenPracticeAutomation
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  3.581 s
[INFO] Finished at: 2026-03-21T12:24:19+05:30
[INFO] ------------------------------------------------------------------------
vboxuser@prathwish03:~/devops$
```

Step 2 : edit the pom.xml file and add the dependencies The pom.xml has the code

```
<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 http://maven.apache.org/maven-v4_0_0.xsd">
 <modelVersion>4.0.0</modelVersion>
 <groupId>com.example</groupId>
 <artifactId>MyMavenPracticeAutomationApp</artifactId>
 <packaging>jar</packaging>
 <version>1.0-SNAPSHOT</version>
 <name>MyMavenPracticeAutomationApp</name>
 <url>http://maven.apache.org</url>


 <dependencies>
   <dependency>
     <groupId>junit</groupId>
     <artifactId>junit</artifactId>
     <version>3.8.1</version>
     <scope>test</scope>
   </dependency>


    <!-- https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-java -->
<dependency>
    <groupId>org.seleniumhq.selenium</groupId>
    <artifactId>selenium-java</artifactId>
    <version>4.29.0</version>
</dependency>
  </dependencies>

  <!-- Build: Configuring plugins and build settings -->
<build>
<plugins>
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.7</source>
<target>1.7</target>
</configuration>
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
        <groupId>org.apache.maven.plugins</groupId>

        <artifactId>maven-jar-plugin</artifactId>
        <version>3.0.1</version>
       <configuration>
            <archive>
                <manifestEntries>
                    <Main-Class>com.example.App</Main-Class>
                </manifestEntries>
            </archive>
        </configuration>

    </plugin>


</plugins>
</build>
</project>
```

Step 3: Edit the App.java

```
package com.example;
import org.openqa.selenium.By;
import org.openqa.selenium.WebDriver;
import
org.openqa.selenium.chrome.Ch
romeDriver; public class App
{
   public static void main( String[] args )
   {
      WebDriver driver = new ChromeDriver();
      driver.get("https://practicetestautomation.com/
      practice-test-login/");
      driver.manage().window().maximize();
      driver.findElement(By.id("username")).sendK
      eys("student");
      driver.findElement(By.id("password")).sendK
      eys("Password123");
      driver.findElement(By.id("submit")).click();
   }
}
```

Step 4:build and run the maven application

To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"**

it openspracticeautomation.com and we can login using the credentials

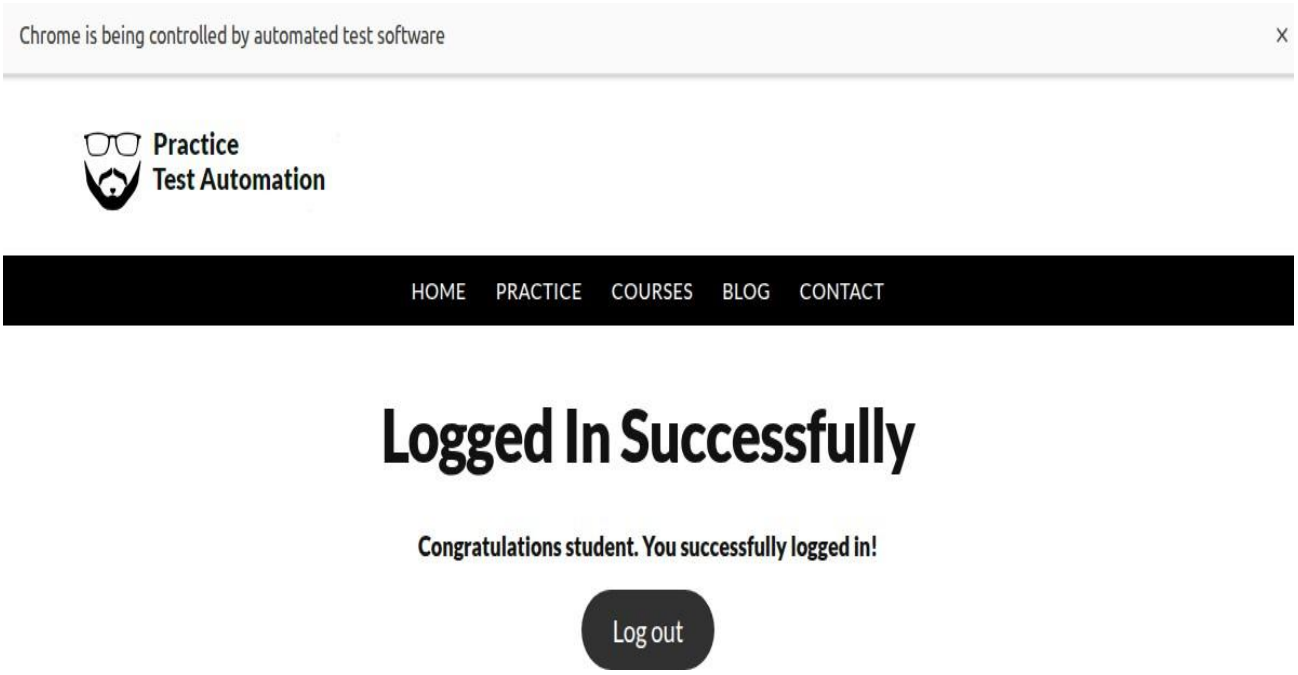

MyMavenPracticeAutomation pipeline

Step 1: Create new file named "**Jenkinsfile**" inside MyMavenPracticeAutomation folder and push into git

Jenkinsfile:

```
pipeline {
    agent any

    tools {
        maven 'Maven'
    }

    stages {

        stage('Checkout') {
            steps {
                git branch: 'main', url:
'https://github.com/PrathwishShetty03/MyMavenAutomation2.git'
            }
        }

        stage('Build') {
            steps {
                sh 'mvn clean package'
            }
        }

        stage('Run Application') {
            steps {
                sh 'mvn exec:java'
            }
        }
    }

    post {
        success {
            echo 'Build successful!'
        }
        failure {
```

```
            echo 'Build failed!'
        }
    }
}
```

Step 2:Open Jenkins Dashboard

- Open Jenkins in browser
- Click on New Item

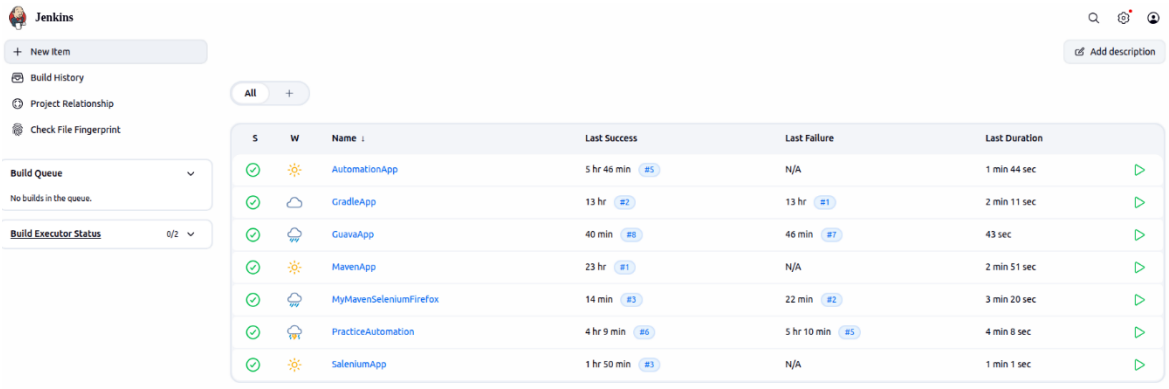

Step 3: Create Pipeline Job

- Enter name: **PracticeAutomation**
- Select **Pipeline**
- Click **OK**

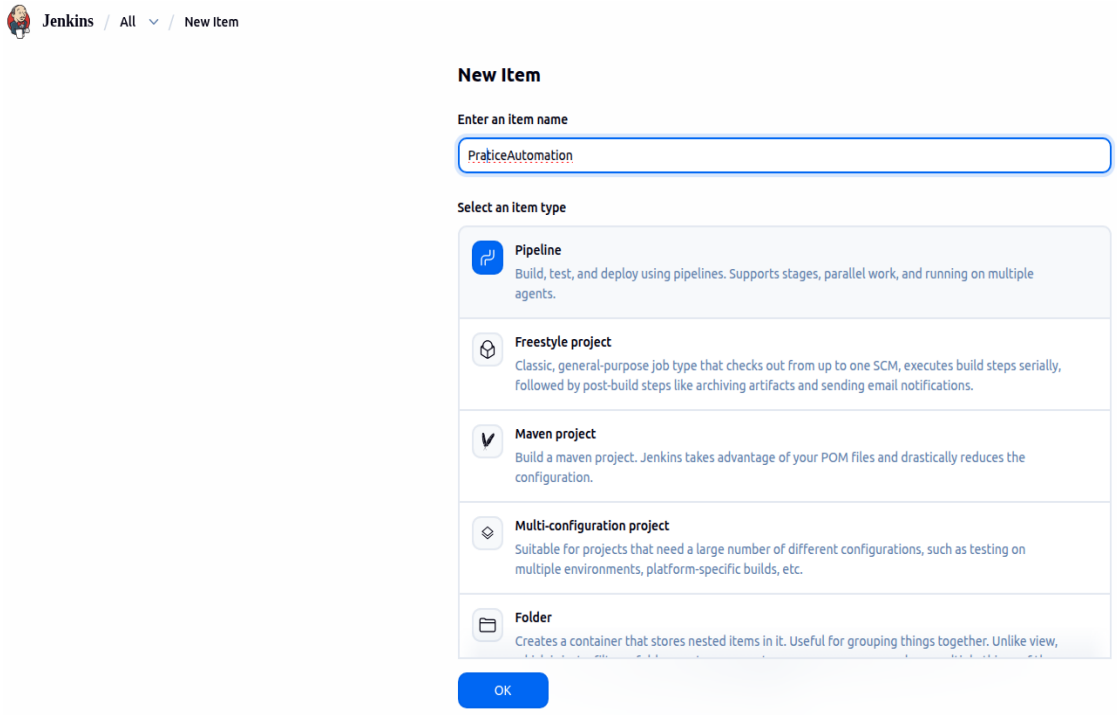

Step 4: Configure Pipeline with GitHub

- Select **Pipeline script from SCM**
- SCM → Git
- Enter repository URL
- Add credentials
- Click **Save**

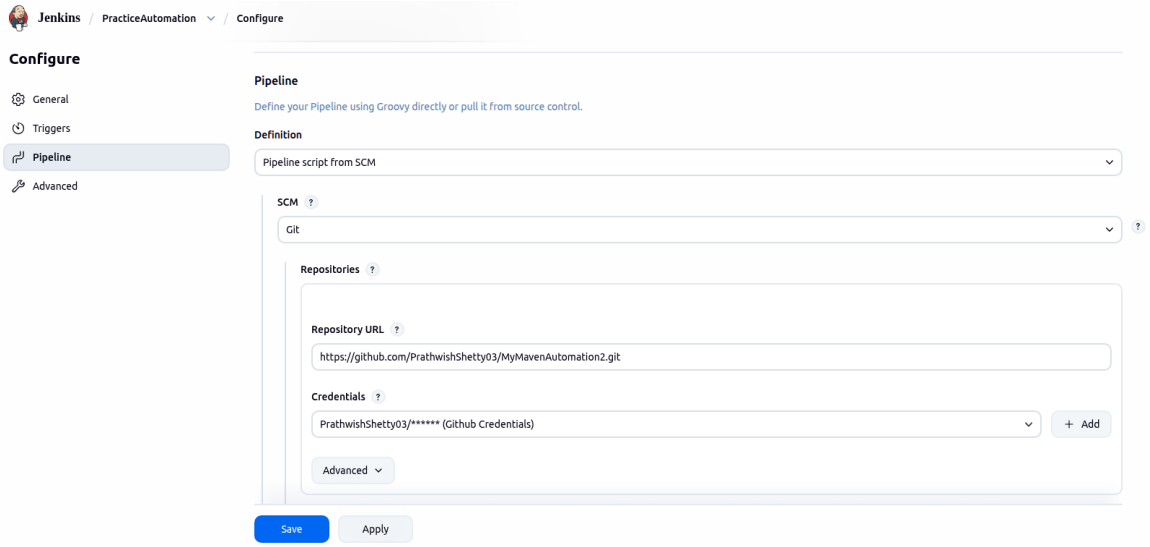

Step 5: Run the Pipeline

- Click **Build Now**

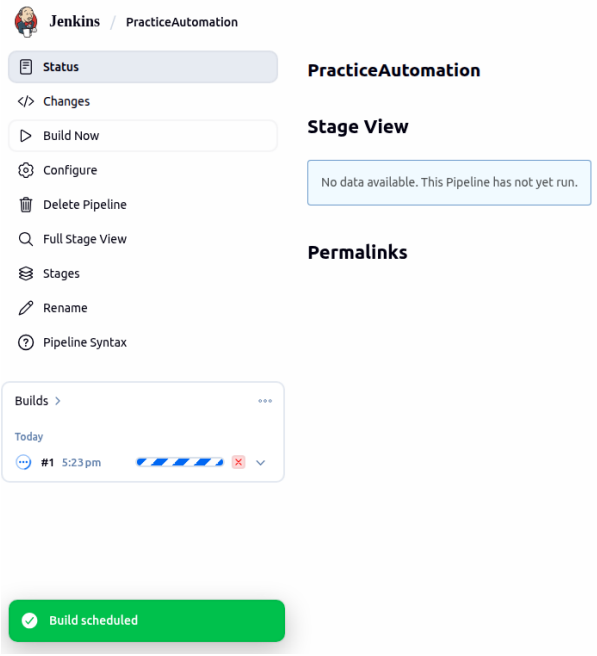

Step 6: Look for the status of project

- Check Stage View
- View Build History

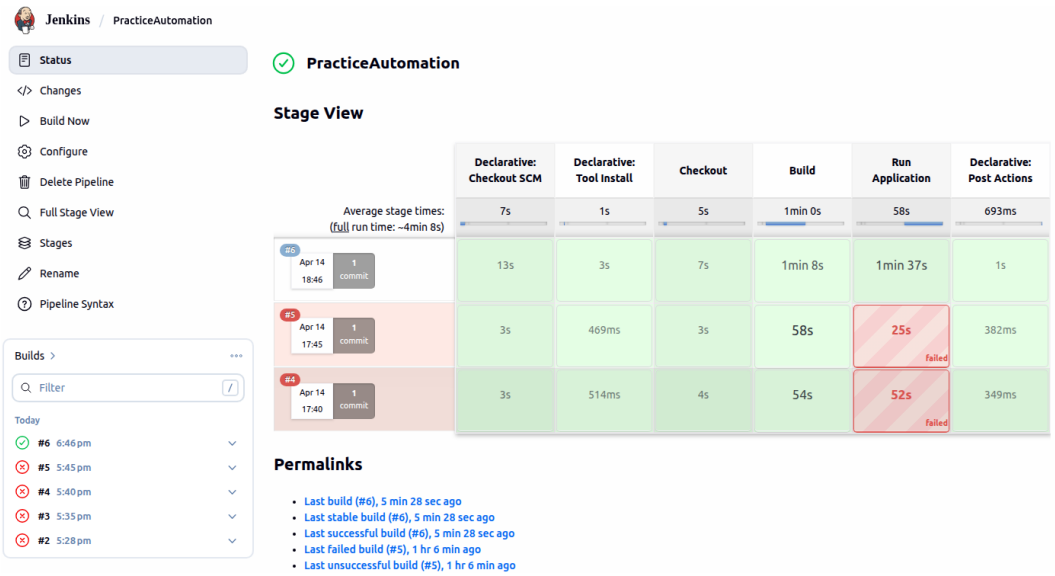

3.automationexercise.com

Step 1: create a maven project on terminal by typing the command **mvn archetype:generate - DgroupId=com.example - DartifactId=MyMavenAutomationExercise - DarchetypeArtifactId=maven-archetype-quickstart - DinteractiveMode=false**

```
vboxuser@prathwish03:~/devops$ mvn archetype:generate -DgroupId=com.example -DartifactId=MyMavenAutomationExercise -DarchetypeArtifactId=maven-arc
quickstart -DinteractiveMode=false
[INFO] Scanning for projects...
[INFO]
[INFO] ------------------< org.apache.maven:standalone-pom >-------------------
[INFO] Building Maven Stub Project (No POM) 1
[INFO] --------------------------------[ pom ]---------------------------------
[INFO]
[INFO] >>> maven-archetype-plugin:3.4.1:generate (default-cli) > generate-sources @ standalone-pom >>>
[INFO]
[INFO] <<< maven-archetype-plugin:3.4.1:generate (default-cli) < generate-sources @ standalone-pom <<<
[INFO]
[INFO]
[INFO] --- maven-archetype-plugin:3.4.1:generate (default-cli) @ standalone-pom ---
[INFO] Generating project in Batch mode
[INFO] ----------------------------------------------------------------------------
[INFO] Using following parameters for creating project from Old (1.x) Archetype: maven-archetype-quickstart:1.0
[INFO] ----------------------------------------------------------------------------
[INFO] Parameter: basedir, Value: /home/vboxuser/devops
[INFO] Parameter: package, Value: com.example
[INFO] Parameter: groupId, Value: com.example
[INFO] Parameter: artifactId, Value: MyMavenAutomationExercise
[INFO] Parameter: packageName, Value: com.example
[INFO] Parameter: version, Value: 1.0-SNAPSHOT
[INFO] project created from Old (1.x) Archetype in dir: /home/vboxuser/devops/MyMavenAutomationExercise
[INFO] ------------------------------------------------------------------------
[INFO] BUILD SUCCESS
[INFO] ------------------------------------------------------------------------
[INFO] Total time:  4.903 s
[INFO] Finished at: 2026-03-21T12:40:22+05:30
[INFO] ------------------------------------------------------------------------
vboxuser@prathwish03:~/devops$
```

Step 2 : edit the pom.xml file and add the dependencies The pom.xml has the code

```
<project
xmlns="http://maven.apache.org/POM/
4.0.0"
xmlns:xsi="http://www.w3.org/2001/X
MLSchema-instance"
   xsi:schemaLocation="http://maven.apache.org/POM/4.0.0
http://maven.apache.org/maven- v4_0_0.xsd">
```

```
    <modelVersion>4.0.0</modelVersion>
    <groupId>com.example</groupId>
    <artifactId>MyMavenExerciseAutomationApp</artifactId>
    <packaging>jar</packaging>
    <version>1.0-SNAPSHOT</version>
    <name>MyMavenExerciseAutomationApp</name>
    <url>http://maven.apache.org</url>

<dep
 ende
ncies
     >
<depe
ndenc
    y>
        <groupId>junit</groupId>
        <artifactId>junit</artifactId>
        <version>3.8.1</version>
        <scope>test</scope>
      </dependency>
      <!--
      https://mvnrepository.com/artifact/org.seleniumhq.selenium/selenium-
      java  -->
      <dependency>
        <groupId>org.seleniumhq.selenium</groupId>
        <artifactId>selenium-java</artifactId>
        <version>4.29.0</version>
      </dependency>

      <dependency>
        <groupId>io.github.bonigarcia</groupId>
        <artifactId>webdrivermanager</artifactId>
        <version>5.8.0</version>
</depe
 ndenc
     y>
</dep
enden
 cies>
 <!-- Build: Configuring plugins and build settings -->
 <build>
```

```
<plugins>
<!-- Example: Maven Compiler Plugin to compile Java code -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-compiler-plugin</artifactId>
<version>3.8.1</version>
<configuration>
<source>1.7</source>
<target>1.7</target>
</configuration>
</plugin>
<!-- Example: Maven Surefire Plugin to run tests -->
<plugin>
<groupId>org.apache.maven.plugins</groupId>
<artifactId>maven-surefire-plugin</artifactId>
<version>2.22.2</version>
</plugin>
<plugin>
        <groupId>org.apache.maven.plugins</groupId>

        <artifactId>maven-jar-plugin</artifactId>
        <version>3.0.1</version>
       <configuration>
          <archive>
             <manifestEntries>
                <Main-Class>com.example.App</Main-Class>
             </manifestEntries>
          </archive>
        </configuration>
      </plugin>
</plugins>
</build>
</project>
```

Step 3: Edit
the App.java
package
com.exampl

```
e;

import org.openqa.selenium.By;
import
org.openqa.selenium.W
ebDriver; import
org.openqa.selenium.W
ebElement;
import
org.openqa.selenium.chrome.Ch
romeDriver; import
org.openqa.selenium.Javascript
Executor;
import
org.openqa.selenium.support.ui.WebDr
iverWait; import
org.openqa.selenium.support.ui.Expect
edConditions;

import
io.github.bonigarcia.wdm.WebDri
verManager; import
java.time.Duration;

public class App {
   public static void main(String[] args) {

      WebDriverManager.chromedrive
      r().setup(); WebDriver driver =
      new ChromeDriver();
      driver.manage().window().maxi
      mize();

      WebDriverWait wait = new WebDriverWait(driver,

      Duration.ofSeconds(10)); try {
         driver.get("https://automationexercise.com");

         // Click Products page
```

```
wait.until(ExpectedConditions.elementToBeClickable(By.xpath("//a[@
href='/products']"))).clic k();

        // Find first Add to Cart button
        WebElement addToCart =
              wait.until(ExpectedConditions.elementToBeClickabl
              e( By.xpath("//a[@data-product-id='1']")));

        // Scroll and click using JavaScript (avoids ad overlay)
        ((JavascriptExecutor)
driver).executeScript("arguments[0].scrollIntoView(true);",
addToCart);
        ((JavascriptExecutor)  driver).executeScript("arguments[0].click();",
        addToCart);

        // Wait for confirmation
        modalwait.until(ExpectedConditions.visibilityOfElementLocated(By.i
        d("cartModal")));

        // Click View Cart
        wait.until(ExpectedConditions.elementToBeClickable(
        By.linkText("View
Cart"))).click();

        System.out.println("Product successfully added to cart!");

      } catch (Exception e) {
        System.out.println("TEST FAILED: " + e.getMessage());
      }

      System.out.println("Browser will remain open for inspection.");
   }
}
```

Step 4:build and run the maven application
To execute type the command **mvn exec:java -Dexec.mainClass="com.example.App"**

it opens automationexercise.com and automatically adds a product to cart

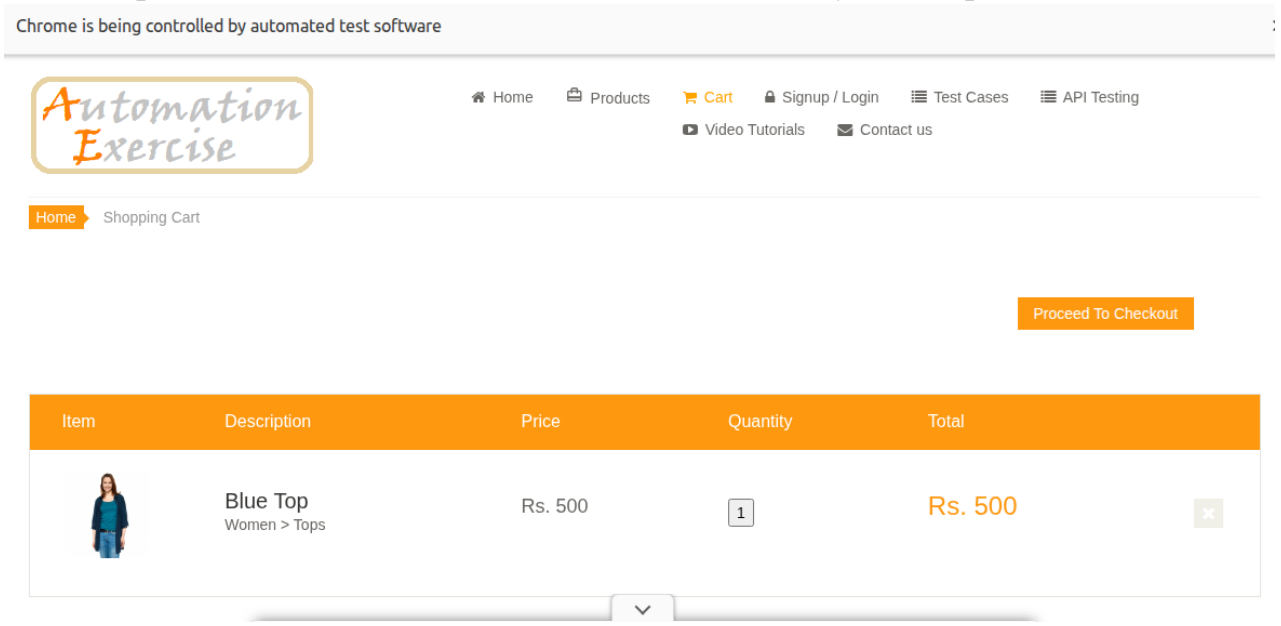

Automation Exercise

Step 1: Create new file named "**Jenkinsfile**" inside MyMavenAutomationExercise folder and push into git

Jenkinsfile:

```
pipeline {
   agent any

   tools {
      maven 'Maven'
   }

   stages {

      stage('Checkout') {
         steps {
            git branch: 'main', url:
'https://github.com/PrathwishShetty03/MyMavenAutomation1.git'
         }
      }

      stage('Build') {
         steps {
            sh 'mvn clean package'
         }
      }

      stage('Test') {
         steps {
            sh 'mvn test'
         }
      }
   }
}
```

Step 2:Open Jenkins Dashboard

- Open Jenkins in browser
- Click on **New Item**

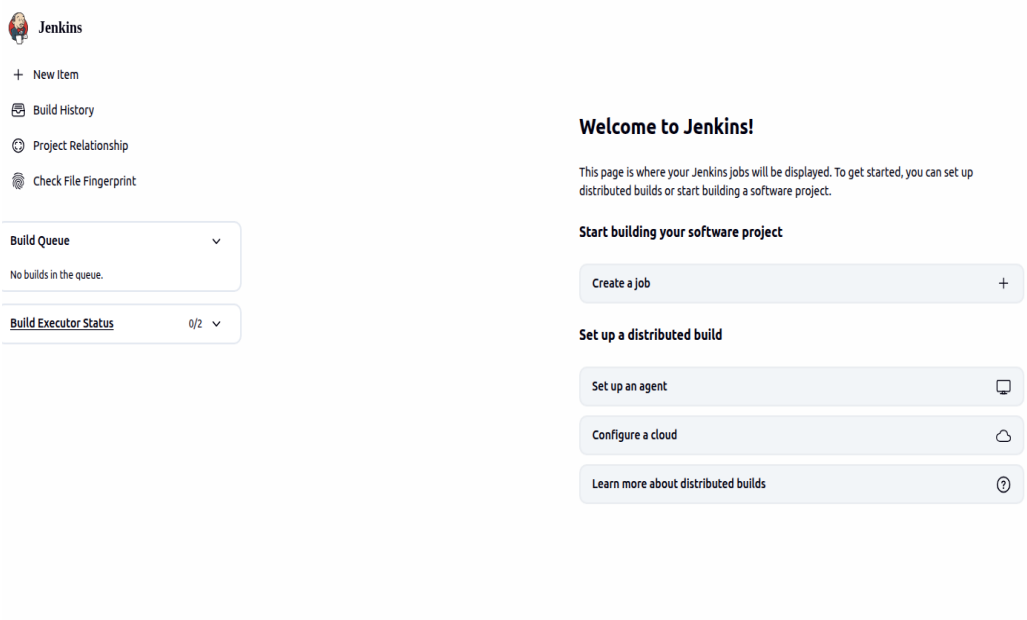

Step 3: Create New Pipeline Job

- **Click on New Item**
- **Enter name: AutomationExercise**
- **Select Pipeline**
- **Click OK**

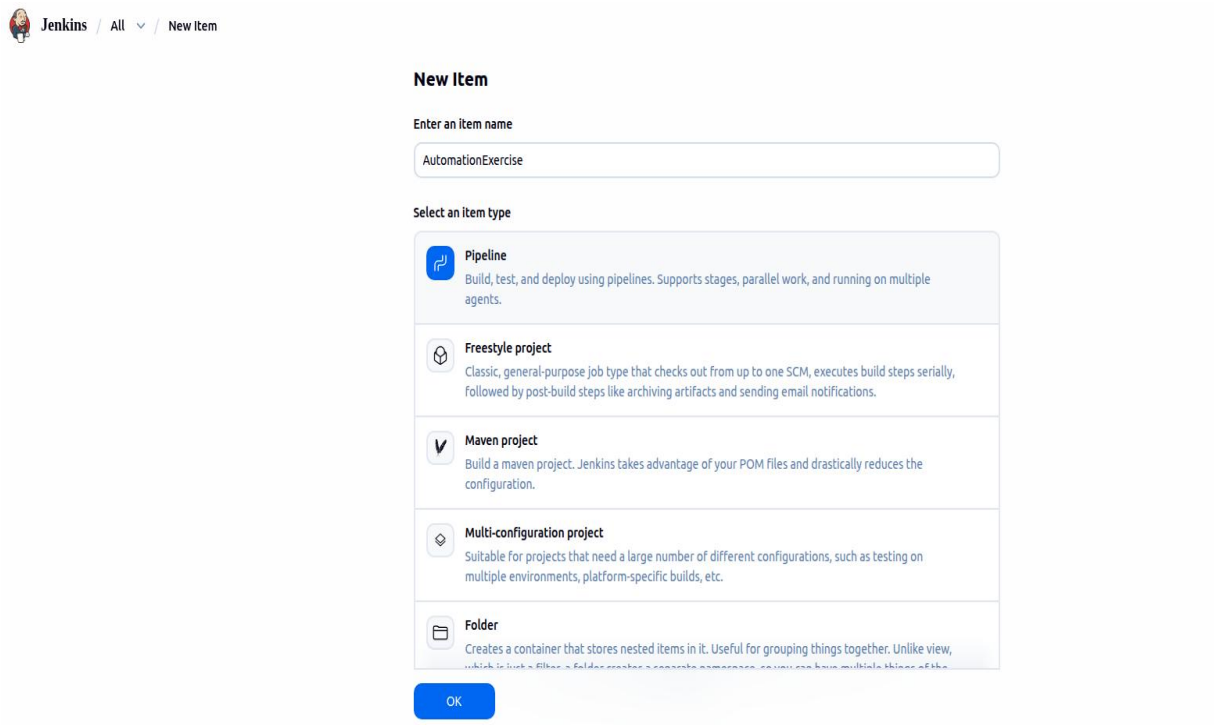

Step 4: Configure Pipeline with GitHub

- Select **Pipeline script from SCM**
- SCM → Git
- Enter repository URL
- Add credentials
- Click **Save**

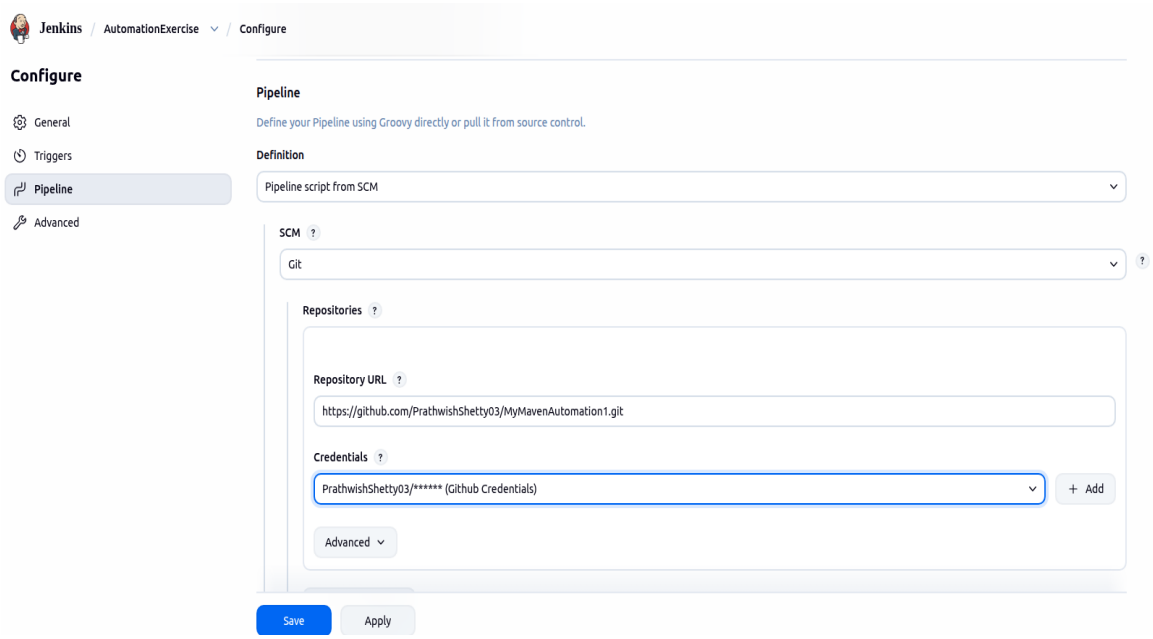

Step 5: Run the Pipeline

- Click **Build Now**

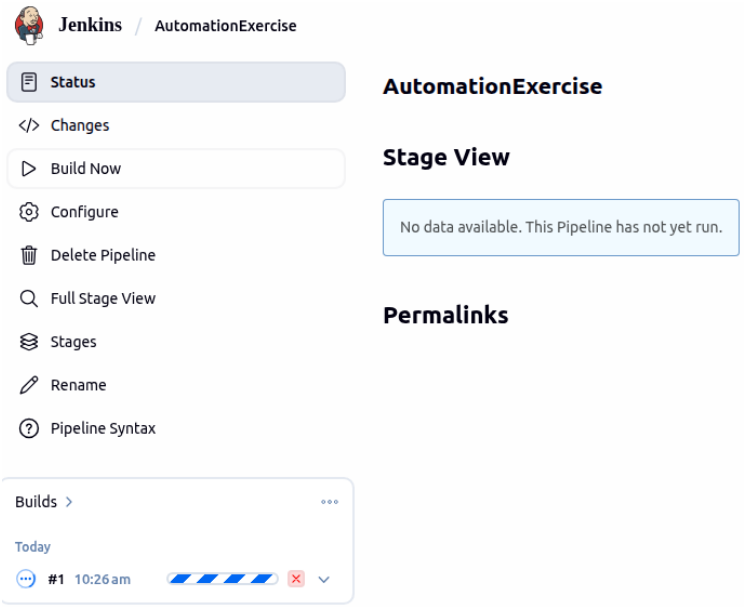

Step 6: Look for the status of project
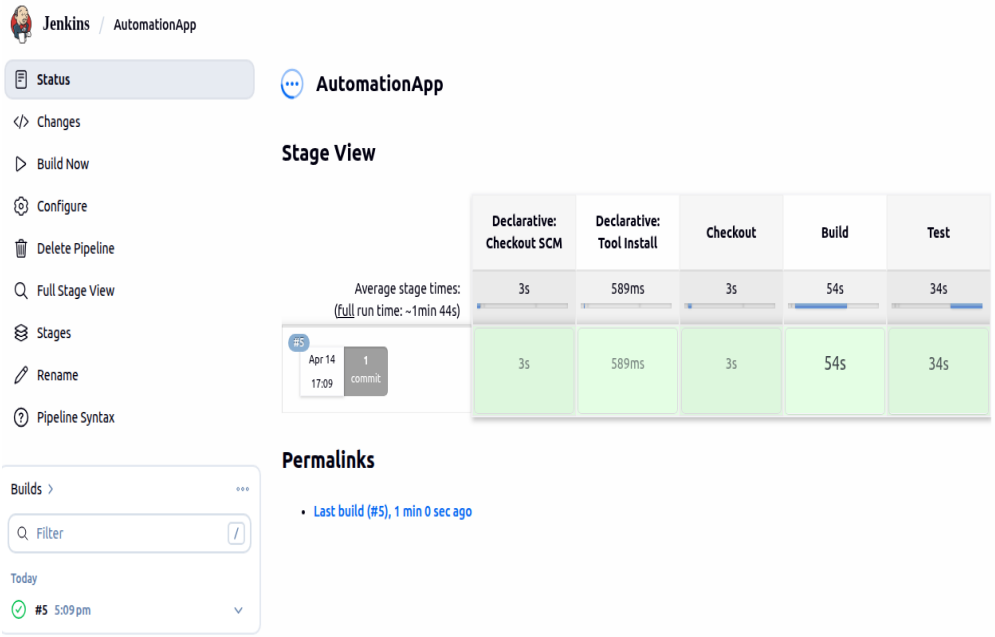
- Check **Stage View**
- View **Build History**