Long Context Compression with Activation Beacon

Peitian Zhang^{2*} Zheng Liu^{1†} Shitao Xiao¹ Ninglu Shao² Qiwei Ye¹ Zhicheng Dou²
1: Beijing Academy of Artificial Intelligence,
2: Gaoling School of Artificial Intelligence, Renmin University of China
{namespace.pt, zhengliu1026}@gmail.com

Abstract

Long context compression is a critical research problem due to its significance in reducing the high computational and memory costs associated with LLMs. In this paper, we propose Activation Beacon, a plug-in module for transformer-based LLMs that targets effective, efficient, and flexible compression of long contexts. To achieve this, our method introduces the following technical designs. 1) We directly compress the activations (i.e. keys and values at every layer), rather than leveraging soft prompts to relay information (which constitute a major bottleneck to encapsulate the complex information within long contexts). 2) We tailor the compression workflow, where each fine-grained input unit is progressively compressed, enabling high-quality compression and efficient computation during both training and inference. 3) We train the model through compression-based auto-regression, making full use of plain texts and instructional data to optimize the model's compression performance. 4) During training, we randomly sample a compression ratio at each step, teaching the model to support a wide range of compression configurations. Extensive evaluations are conducted on various long-context tasks whose lengths (e.g., 128K) may far exceed the maximum training length (20K), such as document understanding, fewshot learning, and Needle-in-a-Haystack. Whilst existing methods struggle to handle these challenging tasks, Activation Beacon maintains a comparable performance to the uncompressed baseline across various scenarios, achieving a 2x acceleration in inference time and an 8x reduction of memory costs for KV cache. Our data, model, and code have been released at https://github.com/FlagOpen/FlagEmbedding/.

1 Introduction

Large language models (LLMs) need to process long contexts to accomplish many important tasks, such as long-document understanding [27], long-content creation [4], and long-term memorization/reasoning [41]. To address these needs, modern LLMs are built with extended context windows (e.g., 128K) that enable remarkable long-context processing capabilities [33; 39; 18]. Despite their effectiveness, LLMs encounter *efficiency challenges* in processing long contexts. On one hand, transformer-based LLMs incur substantial computational costs due to the quadratic complexity of self attention. On the other hand, they require tremendous GPU memory to hold the KV cache of the entire sequence for faster decoding. Both computation and memory costs increase as the context length grows.

A wide array of studies are dedicated to alleviating efficiency issues, among which context compression is a promising direction [32; 11; 20; 24; 25]. This approach aims to compress raw input into more concise representations, allowing the generation process to be conditioned on a shorter context. Therefore, it helps to reduce both computation cost of inference and memory cost from KV cache, while also enabling the processing of longer inputs than the LLM's built-in context window.

^{*}Peitian Zhang and Zheng Liu are the co-first authors

[†]Zheng Liu is the corresponding author

Despite the current progresses, it it remains a tough challenge to compress long contexts. Specifically, existing methods usually summarize the context into a few soft tokens [11; 20], which constitute the major bottleneck to summarize the complex information within long contexts. Besides, they try to compress the context "all-at-once", lacking a fine-grained handling of the detailed information. Moreover, these soft tokens must be re-encoded before generation, resulting in inferior efficiency in both training and inference. Lastly, these methods are learned to compress with a fixed number of soft tokens, thus, it's hard to customize the compression ratio for downstream tasks. While some alternamtive methods focus on deleting unimportant tokens [25; 31], they depend on the input question to estimate the token importance, limiting their efficiency in real-world multi-turn scenarios.

To address the above challenges, we present Activation Beacon (Figure 1), a plug-in module to transformer-based LLMs that enables effective, efficient, and flexible compression of long contexts. Activation Beacon is featured with the following technical designs.

First of all, we introduce a new special token, called the beacon token $\langle b \rangle$. The context is distilled into beacon tokens' *activations* (i.e. keys and values at every layer), whose capacity are large enough to encapsulate the complex information within long contexts.

Next, we tailor the compression workflow, where each fine-grained context unit is progressively compressed. Specifically, the long context is partitioned into equal-size chunks. Each chunk is further split into fine-grained units of size α where α is the desired compression ratio. A group of beacon tokens are interleaved with these units (one beacon token is dispatched to the end of every unit). The LLM encodes one chunk at a time, distilling the chunk's information into beacon tokens' activations during self attention. After encoding, the raw tokens' activations are *discarded*; while the beacon tokens' activations are *accumulated* and *reused* for encoding following chunks. This progressive workflow brings forth several advantages: 1) It can handle inputs longer than the backbone LLM's context window as the chunk size is small. 2) It achieves fine-grained compression since the attention scope of each beacon token is differentiated. 3) By caching and reusing activations, it facilitates contiguous gradient propagation in training, avoids re-encoding overhead in inference, and allows for incrementally updating the compression results in multi-turn scenarios.

Finally, Activation Beacon is learned with compression-based auto-regression to optimize the generation quality conditioned on the compressed context. Thanks to high sample efficiency, the model can be effectively trained with 1B plain corpus and 30K fine-tuning samples (maximum context length is 20K), which can be quickly accomplished. During training, we randomly sample the compression ratio for each chunk, enhancing the model's flexibility to tackle different compression ratios in downstream tasks. Note that all beacon tokens share the same token embedding, one can use arbitrary number of beacon tokens to achieve the desired compression ratio by repeating.

In our experiments, Activation Beacon is applied to Llama-2 [36] and Qwen-2 [39]. We evaluate the resulted models on a variety of long-context tasks (whose lengths may be much longer than the training length, e.g., 128K), such as document understanding, few-shot learning, and Needle-in-a-Haystack. Whilst existing methods struggle to handle these challenging tasks, Activation Beacon maintains a comparable performance to the uncompressed baseline across various compression configurations, meanwhile achieving 2x acceleration and 8x KV cache reduction. Moreover, the LLM's original capabilities on short context is well preserved.

2 Related Works

Recently, processing long context has become a fundamental capability of modern LLMs [33; 18; 39; 16]. The recipe of context window extension is roughly the same: modifying the rotary position embedding [35] by extrapolation and interpolation [9; 1; 34; 17], and leveraging long-dependency data in both the pre-training and post-training stage. Despite the impressive progress in effectiveness, LLMs face significant challenges in efficiency. There is significant computational cost due to the quadratic complexity of transformer, and huge memory cost because LLMs need to hold the KV activations of the entire sequence on GPU for faster decoding. Multiple threads of research endeavour to reduce these costs, which are discussed as follows.

Sparse Attention. Conventional sparse attention methods require re-training a model from scratch using the designated sparse patterns [40; 5]. However, extensive recent studies have identified that the attention pattern of LLMs are naturally sparse despite they are densely trained [26; 38; 22; 43].

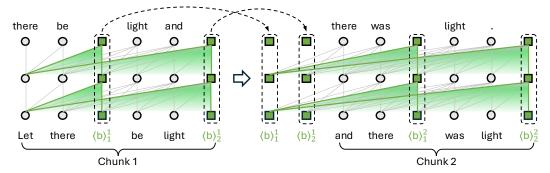


Figure 1: Overview of Activation Beacon. The context is partitioned into chunks. Each chunk is further split into fine-grained units and interleaved with beacon tokens according to a compression ratio (2 in the figure). The LLM encodes one chunk at a time, compressing the context into beacon tokens' activations, which are *accumulated* and *reused* for encoding following chunks.

They also propose to dynamically set appropriate sparse patterns for each head so that the attention mass can be largely preserved, leading to competitive performance against the full-attention method with reduced computation. However, these methods require holding all KV activations on chip to dynamically determine the optimal sparse patterns, making them unsuitable for KV cache reduction.

KV Compression. This line of research focuses on compressing the KV activations to reduce the attention computation as well as the cache size. Since the KV activations are per-layer, per-head, per-token, and per-channel float numbers, they can be reduced from all the five dimensions (including the numerical dimension). For example, CLA [7] shares the KV cache across multiple layers; GQA [2] compresses multiple key/value heads into a single one; MLA [16] compresses the channels into fewer and more compact ones; and KIVI [44] quantizes the numerical value in the activations. The token-wise compression, as introduced in the following, is also known as context compression, which is orthogonal to the compression along other dimensions and hence can be jointly used.

Context Compression. This type of methods aim to compress the raw context into shorter yet more compact representations. Existing studies are usually tailored for compressing short context (less than 1K), which tend to be sub-optimal for long-context compression. Specifically, Gisting [32] compresses the user instruction into gist activations all at once. As a result, it cannot process context longer than the backbone LLM's window. ICAE [20] and AutoCompressor [11] alleviate this problem by segmenting the long context into chunks and compressing each chunk. However, both of them compress the context into soft tokens, which are the major bottleneck to encapsulate the complex information in long contexts. Their compression workflow also lacks fine-grained handling of the chunked inputs, resulting in inferior compression quality. Moreover, these soft tokens require re-encoding before generation, which introduces extra overhead. Lastly, since the number of soft tokens are pre-defined, it is hard to flexibly assign the compression ratio for downstream tasks. CCM [28] is specifically designed for compressing conversations in online chatting, which cannot be used in general long context tasks such as long document understanding. Another branch of methods [25; 31] propose to delete unimportant tokens to realize compression. However, they depend on the input question to accurately estimate the token importance, leading to low efficiency in real-world multi-turn scenarios. Compared with existing approaches, Activation Beacon is able to achieve more effective, efficient, and flexible compression.

3 Methodology

LLMs accomplish arbitrary tasks in the form of next-token prediction. Formally, given the context $X = [x_1, \ldots, x_n]$, the LLM generates the next token based on all preceding tokens and its well-trained parameters: $\Pr(x_{n+1} \mid x_1, \ldots, x_n; \Theta)$. Transformer-based LLMs incur heavy computation cost due to the quadratic complexity of self attention; besides, they require tremendous GPU memory to store the KV cache of $x_{\leq n+1}$ for faster decoding [42]. Both the costs in computation and memory significantly expand when the context length increases.

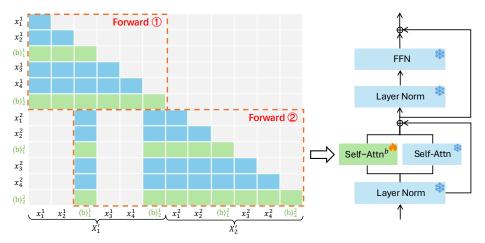


Figure 2: Activation Beacon performs compression during self attention while reusing all other modules of the LLM. *Forward* ①: encode and compress the first chunk. *Forward* ②: encode and compress the second chunk conditioned on activations of preceding beacon tokens.

Activation Beacon employs a new special token, namely beacon token $\langle b \rangle$, and condenses the raw context X into beacon tokens' activations Ψ (i.e. their keys and values at every layer). The next-token prediction is converted to condition on the compressed context instead of the plain one. Given $|\Psi| < |X|$, both the computation cost and the KV cache size are reduced. Additionally, the LLM is enabled to handle context longer than its window size based on the compressed representations. We tailor the compression mechanism and the learning method of Activation Beacon towards achieving effective, efficient, and flexible compression, which will be elaborated in the following.

3.1 Compression Mechanism

Overview. We propose to progressively compress each fine-grained units of long contexs. Specifically, given the input context X whose length may exceed the LLM's context window N, it is first partitioned into chunks of the same size w (e.g., 1024):

$$[x_1, \dots, x_n] \xrightarrow{\text{Partition}} [X_1, \dots X_{\lceil n/w \rceil}], \ X_i = [x_{(i-1)w+1}, \dots, x_{iw}]^3 = [x_1^i, \dots, x_w^i]. \tag{1}$$

Next, for each chunk X_i , we determine a compression ratio α_i (w is evenly divisible by α_i). The chunk is further split into fine-grained units of size α . Then a group of $k_i = w/\alpha_i$ beacon tokens, $B_i = [\langle b \rangle_{1}^{i}, \dots, \langle b \rangle_{k_i}^{i}]$, are *interleaved* with these units. In other words, one beacon token is dispatched to the end of every unit:

$$X_i \xrightarrow{\text{Interleave } B_i} X_i' = [x_1^i, \dots, x_{\alpha_i}^i, \langle \mathbf{b} \rangle_1^i, \dots, x_{w-\alpha_i+1}^i, \dots, x_w^i, \langle \mathbf{b} \rangle_{k_i}^i]. \tag{2}$$

The LLM encodes these chunks *one by one*, compressing the contextual information of each chunk into the corresponding beacon tokens' activations during self attention. After encoding X'_i , we *discard* activations of all the raw tokens X_i , while we *accumulate* the activations of the beacon tokens B_i . When encoding the next chunk X'_{i+1} , the LLM directly conditions on the accumulated beacon activations as a proxy to the raw context $X_{\leq i}$.

This progressive workflow benefits both compression quality and running efficiency. On one hand, it enables thorough distillation of complex information within long contexts and allows for the compression of inputs that exceed the LLM's context window. On the other hand, by caching and reusing beacon tokens' activations, it avoids redudant computation and allows for incrementally update of the compression results in multi-turn interactions.

Encoding and Compression. As shown in Figure 2, Activation Beacon reuses all modules of the LLM except imposing a slight modification on self attention. Without loss of generality, for the *i*-th

 $^{^3}$ The last chunk $X_{\lceil t/w \rceil}$ may be shorter than w, which is omitted for simplicity.

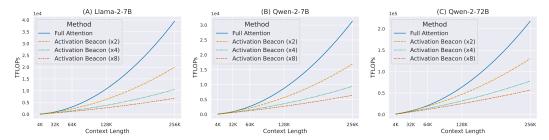


Figure 3: Comparison of the forward FLOPs of different models using full attention and Activation Beacon (the compression ratio is annotated in the brackets).

chunk X'_i , the encoding process can be written as:

$$\text{LLM}(\underbrace{\langle \mathbf{b} \rangle_{1}^{i}, \dots, \langle \mathbf{b} \rangle_{k_{i-1}}^{i-1},}_{\text{beacon activations accumulated from } X'_{< i}} \underbrace{x_{1}^{i}, \dots, x_{\alpha_{i}}^{i}, \langle \mathbf{b} \rangle_{1}^{i}, \dots, x_{w-\alpha_{i}+1}^{i}, \dots, x_{w}^{i}, \langle \mathbf{b} \rangle_{k_{i}}^{i}}_{\text{the current chunk } X'_{i}}),$$

where the input to the LLM is a mix of the activations accumulated from previous chunks and the tokens to be encoded within the current chunk. Let D denote the LLM's hidden size, $\mathbf{H} \in \mathbb{R}^{(w+k_i)\times D}$ denote input hidden states to self attention in an arbitrary layer of the LLM. We first slice out the hidden states of raw tokens and beacon tokens:

$$\mathbb{I}^r = \{j \mid x_j^i \neq \langle \mathbf{b} \rangle\}, \quad \mathbb{I}^b = \{j \mid x_j^i = \langle \mathbf{b} \rangle\}; \quad \boldsymbol{H}^r = \boldsymbol{H}[\mathbb{I}^r], \quad \boldsymbol{H}^b = \boldsymbol{H}[\mathbb{I}^b]. \tag{4}$$

Then the hidden states are projected into queries, keys, and values:

$$Q^{r} = W_{Q}^{r} H^{r}, \qquad K^{r} = W_{K}^{r} H^{r}, \qquad V^{r} = W_{V}^{r} H^{r},$$

$$Q^{b} = W_{Q}^{b} H^{b}, \qquad K^{b} = W_{K}^{b} H^{b}, \qquad V^{b} = W_{V}^{b} H^{b}, \qquad (5)$$

where \boldsymbol{W}_*^r are the LLM's original projection matrices and \boldsymbol{W}_*^b are the newly introduced matrices to handle beacon tokens only. Afterwards, the query/key/value states of raw tokens and beacon tokens are scattered back to acquire $\boldsymbol{Q}, \boldsymbol{K}, \boldsymbol{V} \in \mathbb{R}^{(w+k_i)\times D}$:

$$\boldsymbol{Q}[\mathbb{I}^r] = \boldsymbol{Q}^r, \ \boldsymbol{Q}[\mathbb{I}^b] = \boldsymbol{Q}^b; \quad \boldsymbol{K}[\mathbb{I}^r] = \boldsymbol{K}^r, \ \boldsymbol{K}[\mathbb{I}^b] = \boldsymbol{K}^b; \quad \boldsymbol{V}[\mathbb{I}^r] = \boldsymbol{V}^r, \ \boldsymbol{V}[\mathbb{I}^b] = \boldsymbol{V}^b. \quad (6)$$

Finally, the standard self-attention is computed over the entire input:

$$A = \operatorname{softmax} \left(\operatorname{mask} \left(\frac{Q \left\{ K^{ac}; K \right\}^{T}}{\sqrt{D}} \right) \right), \quad V = A \left\{ V^{ac}; V \right\}.$$
 (7)

In the above equations, $\{\cdot\,;\,\cdot\}$ denotes matrix concatenation. $\boldsymbol{K}^{ac}, \boldsymbol{V}^{ac} \in \mathbb{R}^{m_{i-1} \times D}$ are the beacon tokens' activations accumulated from previous chunks where $m_{i-1} = \sum_{j=1}^{i-1} k_j$, and mask denotes the causal attention mask. During self attention, all tokens are encoded by their relative positions $([m_{i-1},\ldots,m_i+w-1]$ for queries and $[0,\ldots,m_i+w-1]$ for keys). The value states \boldsymbol{V} , are further processed by other modules (e.g., output projection, MLP, and LayerNorm) before passing to the next layer. After self attention, the keys and values of beacon tokens, i.e. \boldsymbol{K}^b and \boldsymbol{V}^b , have distilled the contextual information of X_i . They are incrementally accumulated:

$$K^{ac} = \{K^{ac}; K^b\}, \quad V^{ac} = \{V^{ac}; V^b\}.$$
 (8)

In our default setting, the beacon tokens are interleaved with raw tokens. This leads to a differentiated attention scope for each beacon token $(\langle b \rangle_j^i)$ attends to one more interval than $\langle b \rangle_{j-1}^i$, contributing to the *fine-grained* compression of the context. We also explore the setting to dispatch all beacon tokens at the end of the chunk, which results in inferior compression quality (§4.6).

Note that unlike ICAE [20] and LLMLingua [25], Activation Beacon unifies generation and compression operations within a single forward pass of the LLM. That is to say, the hidden states of the last input token $\boldsymbol{H}[\mathbb{R}^r[-1]]$ is directly used to decode the next token without resorting to another decoder model.

Efficiency Analysis. Activation Beacon reduces the KV cache by α times where α is the *average compression ratio* and hence the memory cost. This is because it only needs to store the compressed activations of the preceding chunks instead of the raw activations. In terms of computation, the situation is a bit more complex. Specifically, Activation Beacon significantly reduces the computation in self attention, because each token only needs to interact with local tokens within the chunk and preceding beacon tokens, which are approximately α times shorter than the raw context. However, it also triggers more computation to encode the inserted beacon tokens in other modules (e.g., MLP). Formally, given an LLM with a fixed number of layers, attention heads, and hidden size, let s denote the input context length, s^{pst} denote the cached context length, the forward FLOPs is:

$$FLOPs = F^{Att}(s, s^{pst}) + F^{Oth}(s), \tag{9}$$

where F^{Att} is the computation during self attention, and F^{Oth} is the computation of other modules. For full-attention models, $s=n, s^{pst}=0$. For "beaconed" models, the FLOPs is:

$$FLOPs^{bcn} = \sum_{i=1}^{\lceil \frac{n}{w} \rceil} F^{Att} \left(\frac{(\alpha+1)w}{\alpha}, \frac{(i-1)w}{\alpha} \right) + F^{Oth} (n + \lceil \frac{n}{\alpha} \rceil).$$
 (10)

Since the implementation of F^{Att} and F^{Oth} depends on the actual setting of the LLM (see Appendix B), we visualize the FLOPs curve of three different LLMs in Figure 3. It can be observed that Activation Beacon consistently saves computational costs across different model settings and scales. The extent of saving amplifies as the context length grows, finally achieving more than x4 reduction at 256K context. The specific implication on latency is studied in §4.3.

3.2 Learning Method

Compression-Based Auto-Regression. Activation Beacon is learned to optimize the generation quality conditioned on the mixture of the compressed context and the local context. Formally, the compression-based next-token prediction loss is minimized:

$$\min_{\boldsymbol{\Theta}^b} \cdot \sum_{i=2}^{\lceil N/w \rceil} \sum_{j=1}^w \Pr(x_j^i \mid \langle \mathbf{b} \rangle_1^1, \dots, \langle \mathbf{b} \rangle_{k_{i-1}}^{i-1}, x_1^i, \dots x_{j-1}^i; \boldsymbol{\Theta}, \boldsymbol{\Theta}^b).$$
(11)

 Θ denotes the parameters of the LLM itself, which are *fixed* throughout the training process. Θ^b includes the projection matrices for beacon tokens at each layer W_Q^b , W_K^b , W_V^b , and the token embedding of beacon token $e_{\langle b \rangle}$ (we use one *shared* embedding for all beacon tokens). The training loss can be obtained from all tokens except the ones in the first chunk. Such a property leads to high sample efficiency that maximizes the use of training data. Note that we exclude the beacon tokens from the above loss (setting their labels to -100) because they are solely intended for compression.

No Stop Gradients. Recurrent memory methods [11; 8] stop the gradients back-propagation at a given chunk number to improve the training efficiency. This is because these methods depend on the *final-layer* outputs of preceding chunks to encode the current chunk, which results in deepened computation graph as more chunks are involved. In contrast, Activation Beacon only depends on the *previous-layer* outputs of preceding chunks (the encoding of X'_i at layer l only conditions on the results of X'_{i-1} at layer l-1), which is the same as any auto-regressive LLMs. Thus, the gradients can naturally flow through all chunks to optimize the compression effect over long contexts.

Chunk-Wise Random Compression Ratio. To teach the model to flexibly support diverse compression granularities, the compression ratio α_i for the *i*-th chunk is *randomly sampled* from $\{2,4,8,16,32\}$ during training. At inference, one can choose one compression ratio according to the specific efficiency requirement in downstream tasks and stick to it for all chunks.

4 Experiments

Our experiment mainly study Activation Beacon's effectiveness ($\S4.2$), efficiency ($\S4.3$), and flexibility ($\S4.4$) in long context compression. Besides, we explore Activation Beacon's impact on short-context capabilities of the backbone LLM ($\S4.5$) and the effect of each technical design ($\S4.6$).

Table 1: Evaluation on LongBench [3]. Activation Beacon maintains comparable performance to the
uncompressed baseline (Full-FT), outperforming other compression methods.

Model	Method	Length	Single-Doc	Multi-Doc	Summ.	Few-Shot	Code
Llama-2-7B	Full Full-FT	4K 32K	24.7 34.8	22.4 27.5	24.6 23.2	63.2 61.8	57.7 57.8
	AutoCompr. ICAE LongLLML. SnapKV Ours	32K 32K 32K 4K 32K	12.9 19.5 21.5 24.2 34.9	16.4 19.2 18.8 22.6 27.5	16.3 19.5 21.7 16.3 25.0	23.8 24.8 49.5 60.1 61.4	39.4 27.8 53.2 57.7 57.8
Qwen-2-7B	Full Full-FT LongLLML. SnapKV	32K 32K 32K 32K 32K	38.8 41.0 24.7 38.7	37.5 40.6 20.3 37.6	26.7 26.8 26.3 26.2	70.1 68.5 55.9 67.1	60.3 66.1 50.1 60.3
	Ours	32K	40.5	40.3	26.8	68.4	66.4

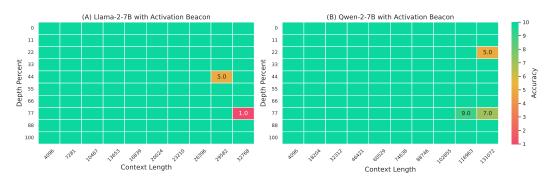


Figure 4: Evaluation on Needle-in-a-Haystack. Activation Beacon can accurately retrieves the needle most of the time, despite the context is far longer than its training data.

4.1 Settings

Implementation. Activation Beacon is applied to Llama-2-7B (chat)⁴ and Qwen-2-7B (instruct). The chunk size w is 1024 for Llama-2 and 2048 for Qwen-2. FlashAttention-2 [15] is used to speed up attention computation. For all our experiments, we use Huggingface framework [37] and one 8xA800 (80G) machine.

Training. The training consists of two phases. In pre-training, we use 1B tokens sampled from RedPajama [14]. The eos token is appended to the end of every document. In fine-tuning, we leverage LongAlpaca [10], BookSum [29], and synthetic data from GPT-3.5 (details in Appendix A). All the training samples are shorter than 20K. The batch size is 8. The learning rate is 5e-5 for pre-training and 1e-5 for fine-tuning, with linear decay and no warmup. As introduced, the LLM's original parameters are frozen throughout the training process.

Baselines. We compare Activation Beacon with the uncompressed baseline (denoted as Full) and the uncompressed baseline fine-tuned with the same training data (denoted as Full-FT). Besides, we include the following context compression methods that can tackle long context for comparison, including AutoCompressors [11], ICAE [20], LongLLMLingua [25], and SnapKV [31]. The first two methods only support Llama-2. To guarantee fair comparison, we fine-tune their official checkpoints using the same training data.

4.2 Compression Effectiveness

To verify the compression effectiveness of Activation Beacon, we evaluate it on LongBench [3], which consists of a variety of long-context tasks with 32K maximum length, including question

⁴We use Llama-2 because AutoCompressor and ICAE are based on it, both of which are important baselines.

Table 2: Evaluation on Multi-Needle-in-a-Haystack where the questions are issued one-by-one in a multi-turn conversation setting. All compression methods use a x8 compression ratio. Activation Beacon consistently outperforms other compression baselines while enjoying lower latency, especially when the context lengthens and the turn number increases.

Model Length Method		1-Turn		2-Turn		3-Turn		
			Acc	Latency	Acc	Latency	Acc	Latency
Llama-2-7B		Full-FT	9.75	1.336	9.45	1.532	9.10	1.726
	32K	AutoCompr. ICAE LongLLML. SnapKV Ours	1.60 2.15 2.05 1.00 9.75	2.135 1.182 2.813 0.859 1.153	1.50 2.15 2.00 1.00 9.40	2.561 1.476 5.062 1.656 1.356	1.50 2.00 2.00 1.00 9.05	2.994 1.805 7.034 2.199 1.638
Qwen-2-7B		Full-FT	9.75	4.399	9.50	5.254	9.20	6.153
	128K	LongLLML. SnapKV Ours	2.00 9.45 9.70	10.455 3.955 2.445	1.55 8.95 9.35	19.768 7.803 2.773	1.50 8.85 9.10	27.751 10.659 2.981

answering, summarization, few-shot learning, and code completion. Since Llama-2 has a context window of 4K, we truncate the context longer than 4K from middle before inputting to it. For compression methods implemented on Llama-2, we set *adaptive* compression ratio, translating to x2 compression for 4K-8K contexts, x4 compression for 8K-16K contexts, and x8 compression for 16K-32K contexts. For methods implemented on Qwen-2, we apply a uniform compression ratio of x4. The results are reported in Table 1. We highligh two observations in the following.

Firstly, Activation Beacon achieves superior compression quality over other compression baselines across all tasks. Concretely, it significantly outperforms ICAE and AutoCompressor, which verifies that several soft tokens are not enough to encapsulate the rich information within long contexts. LongLLMLingua also lags far behind Activation Beacon because it need to delete too many tokens given a high compression ratio (e.g., x4, x8), which may destroy the coherence of the context and lose important information. Despite SnapKV's top performance among baselines, it cannot compress context longer than the backbone LLM's window. This is because it estimates the token importance based on self attention, which becomes inaccurate once the context exceeds the window size, limiting its practical usage when compressing long contexts.

Secondly, Activation Beacon achieves comparable performance to the fine-tuned uncompressed baseline (Full-FT) even though Full-FT takes in the entire context without compression. This indicates that Activation Beacon is able to compress long contexts without evident information loss, which validates its high compression quality yielded from the progressive compression workflow. Furthermore, Activation Beacon improves upon Llama-2 by a large margin despite their context window is the same, i.e. 4K. The gain is because Llama-2 (Full) directly uses the truncated 4K context, while Activation Beacon compresses the 32K context into 4K compact activations. This implies that Activation Beacon can effectively introduce useful information from Llama-2's unseen context. Therefore, it can be viewed as an efficient approach for context extension.

We further evaluate Activation Beacon on Needle-in-a-Haystack (NIAH) following the official settings [21] to investigate whether it will lose fine-grained information. The accuracy is estimated by ChatGPT (ranges from 1 to 10). For both Llama-2 and Qwen-2, we set adaptive compression ratio as introduced above. The results are shown in Figure 4. It can be observed that Activation Beacon **precisely retrieves the needle** most of the time. Note that Activation Beacon conducts *query-independent* compression, which means it has no prior knowledge of what to compress and what not. Hence, this remarkable performance again validates our tailored compression mechanism and learning method can preserve the fine-grained contextual information. Moreover, Activation Beacon is only trained on context shorter than 20K, while its compression capability can generalize to far longer contexts (e.g., 128K).

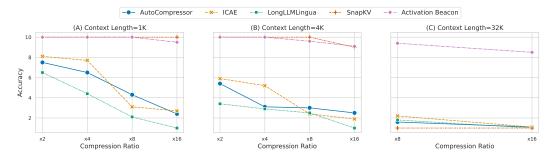


Figure 5: Evaluation on Needle-in-a-Haystack with various compression ratios based on Llama-2. Activation Beacon achieves top compression quality across all compression configurations.

4.3 Compression Efficiency

We evaluate the efficiency of Activation Beacon based on the Multi-Needle-in-a-Haystack task following NeedleBench [30]. Specifically, we fix the context length to 32K for Llama-2 and 128K for Qwen-2, and insert 3 different needles at different positions. The task is organized in a multi-turn conversation setting, where the model is asked to retrieve one specific needle in each turn. The experiment is repeated 20 times for each model with distinct needle positions. In Table 2, we report the accuracy and the end-to-end latency of compression & generation (measured in seconds).

It can be observed that **Activation Beacon enjoys lower latency than other compression baselines**. Notably, it is 1.8x faster than AutoCompressor because it does not have to re-encode the soft tokens from previous chunks. It also leads to 9.3x and 3.6x acceleration upon LongLLMLingua and SnapKV given three turns, respectively. This is because both baselines are query-dependent while Activation Beacon is not, which eliminates the need to re-compute the compression results for different input questions. Moreover, Activation Beacon demonstrates consistent speed-up over the Full-FT baseline, achieving **2x acceleration at 128K context length**. This matches our estimation in Figure 3(b) as Activation Beacon (x8) saves half of the computation. In the meanwhile, since the compression ratio is x8, it leads to **8x reduction of the KV cache**. Lastly, Activation Beacon always attains nearly-lossless generation quality against the uncompressed baseline, which is in line with previous observations.

4.4 Compression Flexibility

Activation Beacon is learned to support various compression ratios during training. In Figure 5, we evaluate its compression quality under different compression ratios and context lengths. According to the figure, Activation Beacon maintains top accuracy across all compression ratios, outperforming most compression baselines by a large margin. Though SnapKV performs on par with our method at 1K and 4K context length, it fails to compress inputs longer than the LLM's window size, which may limit its practical usage. To summarize, Activation Beacon is a flexible solution to long context compression with the support of diverse compression ratios and various context lengths. Generally, we recommend to use x8 compression ratio as it preserves most information with high efficiency.

4.5 Short-Context Capabilities

Since Activation Beacon interleaves beacon tokens with raw tokens and is primarily trained with long-context tasks, it is intriguing to examine whether the current recipe will impair the short-context capabilities of the backbone LLM. In Table 3, we compare Activation Beacon with the original LLM (Full) on popular benchmarks, including MMLU [23], ARC-Challenge [6],

Table 3: Activation Beacon preserves the short-context capabilities of the backbone LLM.

Model	Method	MMLU	ARC-C	BoolQ	GSM8K
Llama-2-7B	Full	47.5	48.5	86.2	9.2
	Ours	46.6	48.4	86.5	9.3
Qwen-2-7B	Full	70.1	62.7	87.1	76.0
	Ours	69.1	62.7	87.2	76.2

BoolQ [12], and GSM8K [13]. We

can observe that Activation Beacon leads to very little performance degradation on short-context tasks. In other words, the short-context capabilities are well preserved. We conjecture that the primary reason is the LLM's original parameters are frozen throughout the training process.

4.6 Ablation Studies

We study the impact of each technical factor, including the compression of fine-grained context units, the sampling strategy of compression ratio, and training stages. The experiments are based on Qwen-2-7B and Single-Doc QA task from LongBench (32K context with x4 compression ratio). The results are shown in Table 4. Firstly, instead of splitting the chunk into fine-grained units and interleaving beacon tokens, we append all beacon tokens at the end of the chunk so that their attention scopes are the same. It can be

Table 4: The impact of different technical factors.

Method	Single-Doc
Default	40.5
w/o Fine-Grained Compression w/o Chunk-Wise Random Ratio w/o Pre-training w/o Fine-tuning	35.2 37.7 34.9 35.5

observed that such operation results in significant information loss after compression, which justifies the effectiveness of our fine-grained compression mechanism. Secondly, we replace the chunk-wise random compression ratio with the instance-wise one, which randomly selects one compression ratio for each training instance rather than each chunk. We can observe that the chunk-wise setting facilitates better learning of the compression functionality. Lastly, we remove either pre-training or fine-tuning. It can be observe that both stages are useful, and the combination of both leads to the optimal performance. This also implies that the compression quality of Activation Beacon can be further enhanced given more abundant and targeted training.

5 Conclusion

This paper introduces Activation Beacon, a plug-in for transformer-based LLMs to enable effective, efficient, and flexible compression of long contexts. Activation Beacon is featured for several critical innovations, including the progressive compression workflow to distill the context into a small set of activations, the compression-based auto-regression to optimize the model with high sample efficiency, and the random sampling of compression ratios to support various downstream scenarios. According to extensive experimental evaluations, Activation Beacon consistently outperforms existing context compression methods across various compression configurations in terms of both effectiveness and efficiency. It even maintains comparable performance to the uncompressed baseline, meanwhile achieving 2x acceleration and 8x KV cache reduction. Moreover, the short-context capabilities of the LLM is well preserved.

References

- [1] Ntk-aware scaled rope, 2023. URL https://www.reddit.com/r/LocalLLaMA/comments/14lz7j5/ntkaware_scaled_rope_allows_llama_models_to_have/.
- [2] Joshua Ainslie, James Lee-Thorp, Michiel de Jong, Yury Zemlyanskiy, Federico Lebrón, and Sumit Sanghai. GQA: training generalized multi-query transformer models from multi-head checkpoints. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023, pp. 4895–4901. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.EMNLP-MAIN.298. URL https://doi.org/10.18653/v1/2023.emnlp-main.298.
- [3] Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. Longbench: A bilingual, multitask benchmark for long context understanding. *arXiv preprint arXiv:2308.14508*, 2023.
- [4] Yushi Bai, Jiajie Zhang, Xin Lv, Linzhi Zheng, Siqi Zhu, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. Longwriter: Unleashing 10,000+ word generation from long context llms. *CoRR*, abs/2408.07055, 2024. doi: 10.48550/ARXIV.2408.07055. URL https://doi.org/10.48550/arXiv.2408.07055.

- [5] Iz Beltagy, Matthew E. Peters, and Arman Cohan. Longformer: The long-document transformer. *CoRR*, abs/2004.05150, 2020. URL https://arxiv.org/abs/2004.05150.
- [6] Sumithra Bhakthavatsalam, Daniel Khashabi, Tushar Khot, Bhavana Dalvi Mishra, Kyle Richardson, Ashish Sabharwal, Carissa Schoenick, Oyvind Tafjord, and Peter Clark. Think you have solved direct-answer question answering? try arc-da, the direct-answer AI2 reasoning challenge. *CoRR*, abs/2102.03315, 2021. URL https://arxiv.org/abs/2102.03315.
- [7] William Brandon, Mayank Mishra, Aniruddha Nrusimha, Rameswar Panda, and Jonathan Ragan-Kelley. Reducing transformer key-value cache size with cross-layer attention. *CoRR*, abs/2405.12981, 2024. doi: 10.48550/ARXIV.2405.12981. URL https://doi.org/10.48550/arXiv.2405.12981.
- [8] Aydar Bulatov, Yuri Kuratov, and Mikhail S. Burtsev. Scaling transformer to 1m tokens and beyond with RMT. *CoRR*, abs/2304.11062, 2023. doi: 10.48550/ARXIV.2304.11062. URL https://doi.org/10.48550/arXiv.2304.11062.
- [9] Shouyuan Chen, Sherman Wong, Liangjian Chen, and Yuandong Tian. Extending context window of large language models via positional interpolation. *arXiv preprint arXiv:2306.15595*, 2023.
- [10] Yukang Chen, Shengju Qian, Haotian Tang, Xin Lai, Zhijian Liu, Song Han, and Jiaya Jia. Longlora: Efficient fine-tuning of long-context large language models. *arXiv preprint arXiv:2309.12307*, 2023.
- [11] Alexis Chevalier, Alexander Wettig, Anirudh Ajith, and Danqi Chen. Adapting language models to compress contexts. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pp. 3829–3846. Association for Computational Linguistics, 2023. URL https://aclanthology.org/2023.emnlp-main.232.
- [12] Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. Boolq: Exploring the surprising difficulty of natural yes/no questions. In Jill Burstein, Christy Doran, and Thamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pp. 2924–2936. Association for Computational Linguistics, 2019. doi: 10.18653/V1/N19-1300. URL https://doi.org/10.18653/v1/n19-1300.
- [13] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *CoRR*, abs/2110.14168, 2021. URL https://arxiv.org/abs/2110.14168.
- [14] Together Computer. Redpajama: An open source recipe to reproduce llama training dataset, 2023. URL https://github.com/togethercomputer/RedPajama-Data.
- [15] Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. *CoRR*, abs/2307.08691, 2023. doi: 10.48550/ARXIV.2307.08691. URL https://doi.org/10.48550/arXiv.2307.08691.
- [16] DeepSeek-AI. Deepseek-v2: A strong, economical, and efficient mixture-of-experts language model, 2024.
- [17] Yiran Ding, Li Lyna Zhang, Chengruidong Zhang, Yuanyuan Xu, Ning Shang, Jiahang Xu, Fan Yang, and Mao Yang. Longrope: Extending Ilm context window beyond 2 million tokens, 2024.
- [18] Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey

Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Lauren Rantala-Yeary, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Raparthy, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaoqing Ellen Tan, Xinfeng Xie, Xuchao Jia, Xuewei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aaron Grattafiori, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alex Vaughan, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Franco, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, Danny Wyatt, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkang Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Firat Ozgenel, Francesco Caggioni, Francisco Guzmán, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Govind Thattai, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Ibrahim Damlai, Igor Molybog, Igor Tufanov, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Karthik Prasad, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kun Huang, Kunal Chawla, Kushal Lakhotia, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manay Avalani, Manish Bhatt, Maria Tsimpoukelli, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal,

Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikolay Pavlovich Laptev, Ning Dong, Ning Zhang, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Rohan Maheswari, Russ Howes, Ruty Rinott, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Kohler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vítor Albiero, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaofang Wang, Xiaojian Wu, Xiaolan Wang, Xide Xia, Xilun Wu, Xinbo Gao, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yuchen Hao, Yundi Qian, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, and Zhiwei Zhao. The llama 3 herd of models, 2024. URL https://arxiv.org/abs/2407.21783.

- [19] Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. The pile: An 800gb dataset of diverse text for language modeling, 2020.
- [20] Tao Ge, Jing Hu, Lei Wang, Xun Wang, Si-Qing Chen, and Furu Wei. In-context autoencoder for context compression in a large language model, 2024.
- [21] gkamradt, 2023. URL https://github.com/gkamradt/LLMTest_NeedleInAHaystack.
- [22] Chi Han, Qifan Wang, Wenhan Xiong, Yu Chen, Heng Ji, and Sinong Wang. Lm-infinite: Simple on-the-fly length generalization for large language models. *CoRR*, abs/2308.16137, 2023. doi: 10.48550/ARXIV.2308.16137. URL https://doi.org/10.48550/arXiv.2308.16137.
- [23] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. In 9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021. OpenReview.net, 2021. URL https://openreview.net/forum?id=d7KBjmI3GmQ.
- [24] Huiqiang Jiang, Qianhui Wu, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Llmlingua: Compressing prompts for accelerated inference of large language models. *arXiv preprint arXiv:2310.05736*, 2023.
- [25] Huiqiang Jiang, Qianhui Wu, Xufang Luo, Dongsheng Li, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Longllmlingua: Accelerating and enhancing llms in long context scenarios via prompt compression, 2023.
- [26] Huiqiang Jiang, Yucheng Li, Chengruidong Zhang, Qianhui Wu, Xufang Luo, Surin Ahn, Zhenhua Han, Amir H. Abdi, Dongsheng Li, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Minference 1.0: Accelerating pre-filling for long-context llms via dynamic sparse attention, 2024. URL https://arxiv.org/abs/2407.02490.
- [27] Ziyan Jiang, Xueguang Ma, and Wenhu Chen. Longrag: Enhancing retrieval-augmented generation with long-context llms. CoRR, abs/2406.15319, 2024. doi: 10.48550/ARXIV.2406. 15319. URL https://doi.org/10.48550/arXiv.2406.15319.
- [28] Jang-Hyun Kim, Junyoung Yeom, Sangdoo Yun, and Hyun Oh Song. Compressed context memory for online language model interaction, 2024.
- [29] Wojciech Kryściński, Nazneen Rajani, Divyansh Agarwal, Caiming Xiong, and Dragomir Radev. Booksum: A collection of datasets for long-form narrative summarization, 2022.
- [30] Mo Li, Songyang Zhang, Yunxin Liu, and Kai Chen. Needlebench: Can Ilms do retrieval and reasoning in 1 million context window?, 2024. URL https://arxiv.org/abs/2407.11963.

- [31] Yuhong Li, Yingbing Huang, Bowen Yang, Bharat Venkitesh, Acyr Locatelli, Hanchen Ye, Tianle Cai, Patrick Lewis, and Deming Chen. Snapkv: Llm knows what you are looking for before generation, 2024. URL https://arxiv.org/abs/2404.14469.
- [32] Jesse Mu, Xiang Lisa Li, and Noah D. Goodman. Learning to compress prompts with gist tokens. *CoRR*, abs/2304.08467, 2023. doi: 10.48550/ARXIV.2304.08467. URL https://doi.org/10.48550/arXiv.2304.08467.
- [33] OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bayarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O'Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. Gpt-4 technical report, 2024. URL https://arxiv.org/abs/2303.08774.
- [34] Bowen Peng, Jeffrey Quesnelle, Honglu Fan, and Enrico Shippole. Yarn: Efficient context window extension of large language models. *arXiv* preprint arXiv:2309.00071, 2023.
- [35] Jianlin Su, Yu Lu, Shengfeng Pan, Bo Wen, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding. *CoRR*, abs/2104.09864, 2021. URL https://arxiv.org/

- abs/2104.09864.
- [36] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- [37] Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Huggingface's transformers: State-of-the-art natural language processing, 2020. URL https://arxiv.org/abs/1910.03771.
- [38] Guangxuan Xiao, Yuandong Tian, Beidi Chen, Song Han, and Mike Lewis. Efficient streaming language models with attention sinks. *arXiv preprint arXiv:2309.17453*, 2023.
- [39] An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. Qwen2 technical report. *CoRR*, abs/2407.10671, 2024. doi: 10.48550/ARXIV.2407.10671. URL https://doi.org/10.48550/arXiv.2407.10671.
- [40] Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontanon, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, et al. Big bird: Transformers for longer sequences. Advances in neural information processing systems, 33: 17283–17297, 2020.
- [41] Zeyu Zhang, Xiaohe Bo, Chen Ma, Rui Li, Xu Chen, Quanyu Dai, Jieming Zhu, Zhenhua Dong, and Ji-Rong Wen. A survey on the memory mechanism of large language model based agents. *CoRR*, abs/2404.13501, 2024. doi: 10.48550/ARXIV.2404.13501. URL https://doi.org/10.48550/arXiv.2404.13501.
- [42] Zhenyu Zhang, Ying Sheng, Tianyi Zhou, Tianlong Chen, Lianmin Zheng, Ruisi Cai, Zhao Song, Yuandong Tian, Christopher Ré, Clark W. Barrett, Zhangyang Wang, and Beidi Chen. H2O: heavy-hitter oracle for efficient generative inference of large language models. In Alice Oh, Tristan Naumann, Amir Globerson, Kate Saenko, Moritz Hardt, and Sergey Levine (eds.), Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 16, 2023, 2023. URL http://papers.nips.cc/paper_files/paper/2023/hash/6ceefa7b15572587b78ecfcebb2827f8-Abstract-Conference.html.
- [43] Qianchao Zhu, Jiangfei Duan, Chang Chen, Siran Liu, Xiuhong Li, Guanyu Feng, Xin Lv, Huanqi Cao, Xiao Chuanfu, Xingcheng Zhang, Dahua Lin, and Chao Yang. Sampleattention: Near-lossless acceleration of long context LLM inference with adaptive structured sparse attention. *CoRR*, abs/2406.15486, 2024. doi: 10.48550/ARXIV.2406.15486. URL https://doi.org/10.48550/arXiv.2406.15486.
- [44] Zirui Liu, Jiayi Yuan, Hongye Jin, Shaochen Zhong, Zhaozhuo Xu, Vladimir Braverman, Beidi Chen, and Xia Hu. Kivi: Plug-and-play 2bit kv cache quantization with streaming asymmetric

quantization. 2023. doi: 10.13140/RG.2.2.28167.37282. URL https://rgdoi.net/10.13140/RG.2.2.28167.37282.

A Training Data

In the pre-training phase, we use 1B tokens from RedPajama. We add an eos token to the end of each document. The documents longer than 20480 or shorter than 2400 are removed.

```
Prompt A.1

{Segment 1}
...

{Segment N}

Question: {Question 1 for Segment 1}
Answer: {Answer 1 for Segment 1}
...

Question: {Question 4 for Segment N}
Answer: {Answer 4 for Segment N}
```

In the fine-tuning phase, we use three datasets. 1) LongAlpaca [10], which contains long-context QA and summarization data; 2) BookSum [29], which contains chapter-level summarization of books. 3) Synthesized QA dataset. This dataset contains 16K long-context question answering instances (13K for books and 3K for papers). Specifically, we split a given long context (a paper or a book) into short segments (a chunk with less than 4096 tokens) using the SemanticTextSplitter⁵. For each segment, we prompt GPT-3.5-turbo to generate 4 question-answer pairs based on the segment. We then group continuous segments using Template A.1, where we can control the resulted context length by concatenating different number of segments. The books are randomly sampled from Books3 corpus, and the papers are sampled from Arxiv, both coming from the Pile [19]. All the above fine-tuning data are formatted in the manner of multi-turn conversations and limit the context length up to 20480. To mitigate forgetting, we also include 5000 samples from the pre-training data.

B FLOPs Calculation

Denote the input sequence length as s, the cached sequence length as s^{pst} , query head number as h^q , key/value head number as h^k , the hidden size D, head dimension as d, intermediate size I, and vocabulary size V.

$$F^{Att} = F^{qkv} + F^{qk} + F^{softmax} + F^{av} + F^{out}$$

$$F^{qkv} = 2 \times s \times D \times d \times h^q + 2 \times 2 \times s \times D \times d \times h^k$$

$$F^{qk} = 2 \times h^q \times s \times (s + s^{pst}) \times d$$

$$F^{softmax} = h^q \times (s + s^{pst}) \times (s + s^{pst})$$

$$F^{av} = 2 \times h^q \times s \times (s + s^{pst}) \times d$$

$$F^{out} = 2 \times s \times d \times h^q \times D$$
(12)

$$F^{Oth} = F^{up} + F^{gate} + F^{down} + F^{lm}$$

$$F^{up} = 2 \times s \times D \times 2 \times I$$

$$F^{gate} = s \times xI$$

$$F^{down} = 2 \times s \times D \times I$$

$$F^{lm} = 2 \times s \times D \times V$$
(13)

⁵https://github.com/benbrandt/text-splitter