


# K-Bound: When Is Label-Free Adaptation Knowable? Helpful, Harmful, and Unknowable Regimes Under Distribution Shift

Test-time adaptation (TTA) may help or harm on unlabeled target data, so a deployment system must choose whether to *adapt*, *freeze*, or *abstain* from committing an update. We define adaptation benefit as  $\Delta = R_T(f_0) - R_T(f_a)$ , so positive values favor adaptation. Over a declared calibration-drift class, a strict adapt or freeze commitment is uniformly supportable if and only if the population evidence margin satisfies  $|M| > \beta$ ; inside the closed band, matched evidence or zero-benefit ambiguity prevents a uniformly sound strict commitment. Knowability-Guided Adaptation (KGA) addresses the separate finite-sample layer: it estimates  $\Delta$  directly from label-free evidence and commits only when a calibrated interval  $\hat{\Delta} \pm \varepsilon$  excludes zero. On real benchmarks KGA does not numerically apply  $|M| > \beta$ , and  $\varepsilon$  is not an estimate of  $\beta$ . Controlled mixed regimes yield confidence-interval-supported wins over both fixed policies, whereas natural one-sided shifts mainly yield no-harm behavior and weak evidence yields abstention or diagnostic failure. K-Bound is therefore a safety and validity layer, not a universal accuracy booster.

**Index terms**— test-time adaptation, distribution shift, selective prediction, identifiability, label-free risk estimation

## Introduction

KGA decision flow

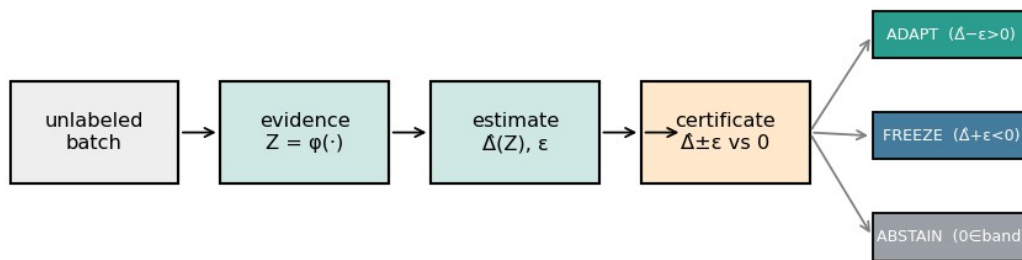

**K-Bound previews the decision.** From an unlabeled batch under shift, the certificate estimates the adaptation benefit  $\hat{\Delta}$  with a finite-sample radius  $\varepsilon$  and returns *adapt* (certified helpful), *freeze* (certified harmful), or *abstain* (no supported strict commitment). Under interval coverage it controls the marginal events  $P(\text{adapt}, \Delta \leq 0)$  and  $P(\text{freeze}, \Delta \geq 0)$  at level  $\alpha$ ; no conditional-error guarantee is claimed.

Test-time adaptation (TTA) updates a model on the unlabeled test stream and, under favorable distribution shift, recovers accuracy. Under unfavorable shift, the same objective

silently degrades it, and with no target labels the system usually cannot tell which case it faces. The decision that matters therefore comes *before* the update: given a frozen baseline  $f_0$  and an adapted candidate  $f_a$ , choose **adapt** when adaptation is knowably helpful, **freeze** when knowably harmful, or **abstain** when label-free evidence cannot identify the sign of the benefit. The field’s default assumption is that adaptation should be made robust enough to always run; we replace it with an explicit, certified decision about whether to run it at all.

Some cases are information-theoretically unknowable. It is established that label-free quantities cannot decide adaptation without an assumption on the shift: identifying OOD accuracy is as hard as identifying the optimal predictor, and the optimal predict-versus-abstain rule under a shift budget has a known form. We sharpen this landscape into a strict-commitment criterion: a strict adapt or freeze action is uniformly sound over the declared drift class *if and only if*  $|M| > \beta$  (Theorem [thm:headline]). In the interior, evidence-identical worlds can have opposite nonzero benefits (Theorem [lem:nonid]); on the boundary, zero-versus-strict ambiguity still rules out a uniformly sound strict action (Proposition [prop:closed-band]). KGA (Algorithm [alg:kga]), a benefit estimator plus a conformal radius wrapped around any adapter (Tent, EATA, SAR), realizes the three-way decision as a finite-sample certificate—a direct benefit estimate with a calibrated radius, not a numerical  $|M| > \beta$  test—controlling marginal false-adapt and false-freeze events under interval coverage (Theorem [thm:certificate]).

The evidence follows the regime map in Table 1. *Identifiable mixed* harmful+helpful regimes supply the **beats-both** policy wins, including a pre-registered head-to-head over protocol-matched POEM-style and AETTA-style baselines. Natural shifts primarily test safety: a reconciled result may tie the better fixed policy, while a provisional result remains outside the headline until its saved summary and canonical replay agree. K-Bound does *not* claim universal improvement: when adaptation is already safe, a valid certificate can only tie always-adapt. It provides a safety layer for TTA rather than an accuracy boost.

### Plain-language takeaway.

If the population evidence margin dominates declared drift ( $|M| > \beta$ ), a strict action is uniformly supportable; otherwise the maximal sound three-way rule abstains. KGA implements the distinct finite-sample interval decision. On single natural-shift datasets this mostly acts as safety or abstention. Beats-both wins require a detectable mixed regime; a constructed pooled mixture is reported as such, not as a claim of single-dataset natural-shift dominance.

### Contributions.

1. **Adapt/freeze/abstain formulation.** We make the target risk difference, strict actions, fallback semantics, and target-label-free information boundary explicit.
2. **Exact strict-commitment frontier.** A strict adapt/freeze action is uniformly sound iff  $|M| > \beta$ ; the interior and boundary cases are proved separately (Theorem [thm:headline]).

3. **Coverage-based finite-sample certificate.** Under measurable interval coverage, the empirical rule controls marginal false-adapt and false-freeze events (Theorem [\[thm:certificate\]](#)).
4. **KGA deployable wrapper.** KGA wraps Tent/EATA/SAR without changing their adaptation objectives and uses shadow state, commit, rollback, and logging (Algorithm [\[alg:kga\]](#)). It is adapter-interface agnostic but adapter-specific in calibration: the benefit model and radius are refit per dataset and per candidate adapter.
5. **Regime-based empirical evaluation.** A uniform panel separates controlled mixed wins, natural no-harm results, constructed routing, and weak-evidence diagnostics.

**Regime map: expected behavior vs. result.** Each regime, an example dataset, the behavior the frontier predicts for a valid certificate, and what was measured. “No-harm” = matches the better fixed policy and beats the worse, without beating both; “beats both” = lower regret than always-adapt and always-freeze. The evidence tier in Table [\[tab:uniform-panel\]](#) states whether that point verdict is locked, reconciled, provisional, or diagnostic.

| Regime              | Example                                                     | Expected                             | Result                                 |
|---------------------|-------------------------------------------------------------|--------------------------------------|----------------------------------------|
| Helpful-dominated   | Camelyon17 OOD                                              | tie always-adapt                     | reconciled no-harm                     |
| Harmful-dominated   | RxRx1 (locked); iWildCam/Office-Home (reconciled, OOF lock) | tie always-freeze, beat always-adapt | no-harm                                |
| Domain-gen. natural | PACS (4 LODO splits)                                        | no-harm or abstain                   | three safety tracks; one null          |
| Mixed + detectable  | CIFAR-10-C Tent/EATA, ImageNet-C SAR                        | beat both fixed policies             | CI-supported                           |
| Weak evidence       | ImageNet-R, CIFAR-10.1                                      | abstain / conservative               | diagnostic; no promoted win            |
| Constructed mixture | three-source OOF stream                                     | route per condition, beat both       | supported routing result, not transfer |

*Table note.* The uniform panel below is the sole empirical index; diagnostic variants and historical runs are not additional evidence for the headline claims.

## Related Work

The closest literature improves test-time updates, monitors adaptation failures, estimates target performance without labels, or characterizes abstention under shift. K-Bound differs

in the decision object: it certifies the sign of the frozen-versus-adapted risk difference before the candidate state is committed.

## Test-Time Adaptation

Tent , SHOT , TTT , EATA , SAR , CoTTA , and MEMO improve adaptation through entropy minimization, filtering, regularization, sharpness-aware updates, or temporal stabilization (survey: ). These methods primarily answer *how* to adapt. Even when the update rule is more stable, the deployment system generally still commits to adaptation rather than certifying that the candidate has positive target benefit.

## Guarded and Monitored Adaptation

POEM , sequential risk monitors , PeTTA , and sample-level filters such as DeYO guard an adaptation stream during or after updating. These approaches are complementary to K-Bound. They typically monitor a proxy or intervene in one failure direction, whereas K-Bound poses a pre-commitment three-way decision over the benefit sign and explicitly represents an unknowable region.

## Label-Free Performance Estimation

ATC , agreement-on-the-line , AETTA , and related confidence-style estimators estimate target accuracy or error without target labels. Estimating  $R_T(f)$  is not identical to certifying  $\text{sign}(R_T(f_0) - R_T(f_a))$ : a deployment controller needs the sign of a paired risk difference and must account for uncertainty around zero. K-Bound uses this difference as the estimand and abstains when the available evidence does not identify its sign.

## Impossibility, Abstention, and Risk Control

General label-free target-risk identification requires assumptions on the shift . Kalai and Kanade characterize a related abstain-versus-predict decision under a shift budget, while selective prediction abstains on individual labels. K-Bound specializes this landscape to adaptation benefit, localizes the comparison to the disagreement region, and derives an adapt/freeze/abstain certificate. Its empirical uncertainty layer connects to split conformal prediction, conformal under shift, RCPS, and Learn-then-Test .

## Surviving Gap

Existing work provides stronger adapters, reactive monitors, label-free accuracy estimates, and general abstention theory. The remaining gap is a pre-commitment rule for the sign of adaptation benefit that (i) distinguishes helpful, harmful, and unsupported decisions, (ii) states the assumptions under which the decision is valid, and (iii) controls marginal false adaptation under a calibrated uncertainty model. K-Bound addresses this gap with the population frontier and its finite-sample realization, KGA.

## Problem Formulation and Validity

### Deployment Setting and Adaptation Benefit

Source data follow  $P_S(X, Y)$  and may be labeled during training and development. Deployment data follow  $P_T(X, Y)$ , but only target inputs and model outputs are available when the decision is made. A frozen predictor  $f_0$  serves as the safe fallback, and an adapter  $A$  proposes a temporary candidate  $f_a = A(f_0, X_{1:m})$  from an unlabeled target batch. For loss  $\ell$ , the target risk and adaptation benefit are

$$R_T(f) = E_{P_T}[\ell(f(X), Y)], \Delta = R_T(f_0) - R_T(f_a).$$

Thus  $\Delta > 0$  favors committing the candidate,  $\Delta < 0$  favors retaining the frozen state, and  $\Delta = 0$  makes the two actions risk-equivalent. Target labels reveal  $\Delta$  only during offline auditing; they are not available to the deployment rule.

### Target-Label-Free Evidence and Decision Semantics

The controller observes a label-free evidence vector  $Z = \phi(X_{1:m}, f_0, f_a)$  containing quantities such as prediction entropy, confidence, class-balance statistics, frozen-versus-adapted disagreement, output-distribution drift, and update magnitudes. The deployment rule returns

$$g(Z) \in \{\text{adapt}, \text{freeze}, \text{abstain}\}.$$

Adapt commits  $f_a$ ; freeze rejects the proposal and retains  $f_0$  (or the latest certified state in continual operation); and abstain declines to change the model, serves the frozen prediction, and may request more evidence or human review. Abstention therefore applies to the update decision, not to prediction itself.

### What “Label-Free” Means

K-Bound is target-label-free rather than supervision-free. Source labels and a held-out development set may be used to fit the benefit estimator and calibrate its uncertainty radius. No target-test label may influence the adapter configuration, evidence map, benefit estimator, radius, action threshold, or model selection. Target-test labels are opened only after all decisions are frozen, for reporting accuracy, regret, and false-adapt events.

*Data access by stage. Target-test labels are forbidden until offline audit.*

Stage

---

Source training

Benefit/radius calibration

Deployment decision

Offline evaluation

## Assumptions and Validity Scope

The theory and the finite-sample certificate rely on distinct assumptions. *Risk alignment* determines whether the evidence can identify or bound the benefit sign over the declared target class. *Coverage* determines whether the empirical interval contains the true benefit at the stated rate. *Exchangeability* (or an explicit shift correction) connects calibration residuals to deployment residuals. The adapter, evidence schema, estimator, and calibration protocol must be fixed before held-out scoring. If these conditions cannot be justified, the theorem does not license a commitment; the operational fallback is freeze or abstain. Risk alignment is an assumption on the deployment class, not a property certified by fitting a benefit regressor: support and residual diagnostics may reject implausible evidence maps, but they do not verify it universally.

*Assumptions, their role, and the safe response when they are unsupported.*

| Condition                                  | Role                                                | If unsupported                                              |
|--------------------------------------------|-----------------------------------------------------|-------------------------------------------------------------|
| Risk-aligned $Z$                           | Benefit sign is recoverable over the declared class | abstain; do not interpret a point estimate as a certificate |
| Coverage of $\hat{\Delta} \pm \varepsilon$ | Controls marginal false-adapt/freeze                | recalibrate, widen the radius, or freeze                    |
| Exchangeable/corrected residuals           | Transfers calibration to deployment                 | use shift-aware calibration or abstain                      |
| Bounded loss/benefit                       | Supports concentration and finite-sample analysis   | clip/redefine the loss or state no bound                    |
| Frozen protocol                            | Prevents target-test leakage and selection bias     | rerun with a locked protocol                                |

## Notation and Observability

Table 4 lists the core quantities and marks which are observable at deployment.

*Core quantities. The population drift budget  $\beta$  and empirical radius  $\varepsilon$  are related but not interchangeable.*

Symbol

$f_0, f_a$

$\Delta$

$D$

$M$

$\gamma$

$\beta$

$Z$

$\hat{\Delta}$  $\varepsilon$  $\alpha$ 

## Multiclass and Regression Scope


The binary 0–1 loss case gives the cleanest frontier because, on  $D = \{x : f_0(x) \neq f_a(x)\}$ , exactly one predictor is correct. For multiclass 0–1 loss,

$$\Delta = P_T(D)(p_a - p_0), p_j = P_T(f_j(X) = Y \mid D),$$

so the decision becomes an ordinal comparison of the two disagreement-region accuracies. For squared-loss regression, the risk difference reduces to a disagreement-local moment. The main theorem uses a split-observable decomposition  $\text{sign}(\Delta) = \text{sign}(M + \gamma)$ ; the multiclass bridge is stated below and the regression derivation appears in Appendix 16.

[prop:multiclass] For multiclass 0/1 loss,  $\Delta = \mu_T(D)(p_a - p_0)$  with  $p_j = P_T(f_j(X) = Y \mid D)$ . If the disagreement-region accuracy gap admits a split-observable decomposition  $p_a - p_0 = M_{mc} + \gamma_{mc}$  with  $|\gamma_{mc}| \leq \beta_{mc}$ , then  $|M_{mc}| > \beta_{mc}$  implies  $\text{sign} \Delta = \text{sign} M_{mc}$ . The converse strict-commitment result additionally requires a richness assumption: the declared class must contain augmented-evidence-identical laws whose admissible  $\gamma_{mc}$  values straddle  $-M_{mc}$ , together with the zero-benefit boundary law. At  $M_{mc} = \beta_{mc} = 0$ , the sign is identified as zero.

In the multiclass experiments KGA estimates  $\Delta$  directly through the benefit proxy  $\hat{\Delta} = h_\theta(Z)$  (not  $M_{mc}$  itself); the binary frontier is the identifiability backbone, and the multiclass results are evaluated through this benefit-estimation route.

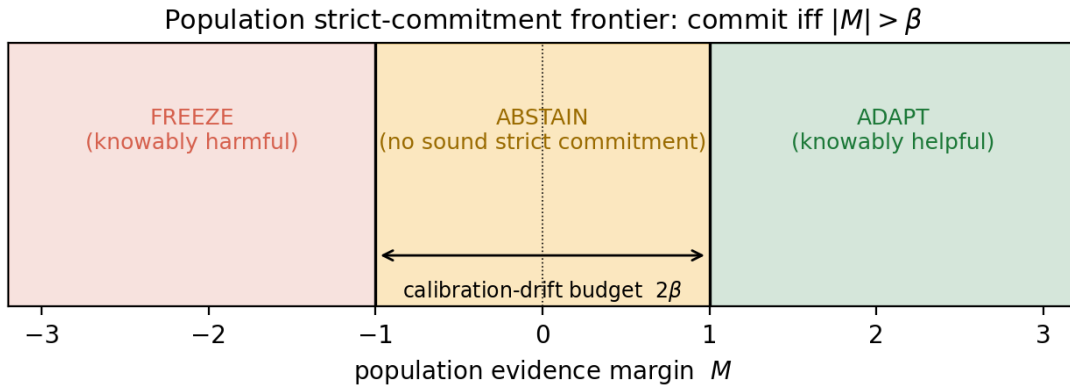

**Population strict-commitment frontier.** The population rule supports adapt or freeze outside the drift band and abstains inside it. At the boundary, zero-benefit ambiguity rules out a uniformly sound strict action; opposite nonzero signs are claimed only in the interior. KGA uses the separate finite-sample interval rule in Fig. 3.

## Formal Setup

Source law  $P_S(X, Y)$  supplies labels at train/validation; target law  $P_T(X, Y)$  exposes only  $P_T(X)$  at deployment. Fix loss  $\ell$ , frozen predictor  $f_0$ , candidate  $f_a$ , and target measure  $\mu_T$  on inputs. Write target risk  $R_T(f) = E_{P_T}[\ell(f(X), Y)]$  and the *adaptation benefit*

$$\Delta := R_T(f_0) - R_T(f_a) \quad (\Delta > 0 \Leftrightarrow \text{adapting helps}).$$

The *disagreement region*  $D := \{x : f_0(x) \neq f_a(x)\}$  is observable from  $(f_0, f_a)$ .

[ass:deploy] Unless stated otherwise: binary label  $Y \in \{0, 1\}$ , 0/1 loss  $\ell$ , and  $\mu_T(D) > 0$ . Fix a source-calibrated score  $s : X \rightarrow [0, 1]$  estimating the candidate's *pointwise correctness* (e.g. a Platt-scaled confidence that  $f_a$  is right at  $x$ ), and write the target pointwise correctness  $\eta_a(x) := P_T(f_a(X) = Y \mid X = x)$  on  $D$ , so that  $E_{\mu_T}[\eta_a \mid D] = \hat{a}$ . Define the *observable margin*

$$M := E_{\mu_T}[s(X) \mid D] - 1/2,$$

the *calibration drift* (unobserved at deploy)

$$\gamma := E_{\mu_T}[\eta_a(X) - s(X) \mid D],$$

and label-free evidence  $Z = \phi(X_{1:m}, f_0, f_a)$  for any measurable  $\phi$  using only unlabeled batches and model outputs (entropy, confidence, drift, disagreement, update norms). A *label-free rule* is any measurable map  $g : Z \rightarrow \{\text{adapt}, \text{freeze}, \text{abstain}\}$  that does not use target labels on the deployment batch.

[def:risk-align] Evidence  $Z$  is *risk-aligned on a class*  $P$  if no two laws  $P_T^1, P_T^2 \in P$  with  $\text{sign } \Delta_1 \neq \text{sign } \Delta_2$  satisfy  $\text{Law}(Z \mid P_T^1) = \text{Law}(Z \mid P_T^2)$ .

All frontier claims stated in terms of  $M$  additionally require  $M$  to be determined on each evidence-law fibre; equivalently, take the population evidence to be  $\tilde{Z} = (Z, M)$ . Without this requirement,  $|M| > \beta$  proves sign stability *given*  $M$ , not identifiability from  $\text{Law}(Z)$  alone. Fitting a benefit regressor does not certify risk alignment: support, dependence, and residual diagnostics may falsify a proposed evidence map but cannot verify the assumption uniformly over the declared deployment class.

[def:regimes] At evidence  $z$ : *knowably helpful* if the population frontier certifies  $\Delta > 0$  (adapt); *knowably harmful* if it certifies  $\Delta < 0$  (freeze); *unsupported for strict commitment* if the same augmented-evidence law is compatible with distinct signs, including zero versus a strict sign (abstain).

[rem:four-quantities] Do not confuse  $M$  (observable margin, deploy-time),  $\gamma$  (realized drift, latent),  $\beta$  (declared bound  $|\gamma| \leq \beta$  on the deployment class), and  $\varepsilon$  (finite-sample radius from held-out residuals). The radius  $\varepsilon$  operationalizes coverage; it is *not* an estimate of  $\beta$ .

| Symbol | Meaning    | Role            |
|--------|------------|-----------------|
| $M$    | observable | evidence toward |



|               |                              |                              |
|---------------|------------------------------|------------------------------|
|               | evidence margin              | adapt/freeze                 |
| $\gamma$      | realized calibration drift   | can reverse the benefit sign |
| $\beta$       | declared bound on $ \gamma $ | population frontier          |
| $\varepsilon$ | residual quantile radius     | finite-sample certificate    |

For a supplied drift budget  $\beta \geq 0$ , the *declared deployment class* is

$$C_\beta := \{P_T : |\gamma(P_T)| \leq \beta\}.$$

Identifiability statements below are *over*  $C_\beta$ , not over arbitrary shifts.

## Theory

### Roadmap

The theoretical spine has three layers. First, the risk difference reduces to the region where the frozen and candidate predictions disagree. Second, matched label-free evidence can support incompatible benefit signs, which establishes an abstention requirement. Third, the decomposition  $\text{sign}(\Delta) = \text{sign}(M + \gamma)$  yields the population frontier, while a calibrated interval around  $\hat{\Delta}$  yields the finite-sample decision rule.

[lem:reduction] Under Assumption [\[ass:deploy\]](#), with  $\acute{a} := P_T(f_a = Y \mid D)$ ,

$$\begin{aligned} \Delta &= 2\mu_T(D)(\acute{a} - 1/2), \\ \text{sign } \Delta &= \text{sign}(\acute{a} - 1/2) = \text{sign}(M + \gamma). \end{aligned}$$

The identity  $\text{sign } \Delta = \text{sign}(M + \gamma)$  holds for *every* target law; it does not assume  $|\gamma| \leq \beta$ .

On  $D$  exactly one of  $f_0, f_a$  is correct under 0/1 loss, so the benefit equals  $2\mu_T(D)(\acute{a} - 1/2)$ . By the definitions of  $M$  and  $\gamma$ ,

$$M + \gamma = \underbrace{(E_{\mu_T \mid D}[s] - 1/2)}_{\text{red}} + \underbrace{E_{\mu_T \mid D}[\eta_a - s]}_{\text{red}}$$

so  $\text{sign } \Delta = \text{sign}(\acute{a} - 1/2) = \text{sign}(M + \gamma)$ .

[lem:nonid] Fix  $\alpha \in (0, 1/2)$  and  $\beta > 0$ . For any margin with  $|M| < \beta$  there exist  $P_T^1, P_T^2 \in C_\beta$  such that  $L a w(Z \mid P_T^1) = L a w(Z \mid P_T^2)$ ,  $\text{sign } \Delta_1 = -\text{sign } \Delta_2 \neq 0$ , and  $|M(P_T^1)| < \beta$ . (For  $\beta = 0$  the class  $C_0$  forces  $\gamma = 0$ , so  $\text{sign } \Delta = \text{sign } M$  is determined and no such pair exists: matched-

evidence ambiguity is a strictly-positive-drift phenomenon.) Consequently, any label-free rule  $g$  with  $P[g = \text{adapt}, \Delta \leq 0] \leq \alpha$  and  $P[g = \text{freeze}, \Delta \geq 0] \leq \alpha$  must satisfy  $P[g = \text{abstain}] \geq 1 - 2\alpha$  on this shared evidence law.

Choose  $0 < \delta < \min\{\beta - |M|, 1/2\}$  and construct the two label laws explicitly. For  $\theta \in \{+1, -1\}$  define  $P_T^\theta$  on  $X \times \{0, 1\}$  by  $P_T^\theta(dx, y) = \mu_T(dx) K^\theta(x, y)$  with label kernel

$$K^\theta(x, y) = \begin{cases} 1/2 + \theta\delta, & x \in D, y = f_a(x), \\ 1/2 - \theta\delta, & x \in D, y = f_0(x), \\ K^\circ(x, y), & x \notin D, \end{cases}$$

where  $K^\circ$  is any fixed conditional label law used by *both* worlds (e.g. the source conditional). On  $D$  the binary labels satisfy  $\{f_0(x), f_a(x)\} = \{0, 1\}$ , so  $K^\theta(x, \cdot)$  is a valid Bernoulli law ( $\delta < 1/2$  keeps both masses in  $(0, 1)$ ); off  $D$  the two predictors agree, so those labels contribute identically to both risks and cancel in  $\Delta$ . *Class membership:*

$\eta_a^\theta(x) = 1/2 + \theta\delta$  on  $D$ , hence  $\dot{a}_\theta = 1/2 + \theta\delta$  and  $\gamma_\theta = \dot{a}_\theta - (M + 1/2) = \theta\delta - M$ , with

$|\gamma_\theta| \leq \delta + |M| < \beta$ ; both worlds lie in  $C_\beta$ . *Matched evidence:* the input marginal  $\mu_T$  and

$(f_0, f_a, s)$  are unchanged, and  $Z = \phi(X_{1:m}, f_0, f_a)$  uses no labels, so

$\text{Law}(\tilde{Z} \mid P_T^+) = \text{Law}(\tilde{Z} \mid P_T^-)$  for  $\tilde{Z} = (Z, M)$ . *Opposite signs:* Lemma [lem:reduction] gives

$\Delta_\theta = 2\mu_T(D)\theta\delta \neq 0$  with  $\text{sign } \Delta_\theta = \theta$ . A label-free rule therefore has the same action probabilities in both worlds. Its adapt probability is at most  $\alpha$  in the negative world and its freeze probability is at most  $\alpha$  in the positive world, so its abstention probability is at least  $1 - 2\alpha$ . An explicit Gaussian witness appears in Appendix 15 (Theorem [thm:imp]).

[prop:closed-band] Fix  $\alpha \in (0, 1/2)$ . If  $|M| = \beta > 0$ , the declared class contains an augmented-evidence-identical zero-benefit world ( $\gamma = -M$ ) and a strict-benefit world of sign  $M$  ( $\gamma = 0$ ). In the zero-benefit world both strict actions are errors under the events used in Theorem [lem:nonid], so any rule controlling both marginal errors at level  $\alpha$  abstains with probability at least  $1 - 2\alpha$ . If  $M = \beta = 0$ , every admissible world has  $\Delta = 0$  and the same conclusion holds directly. Thus abstention is the maximal sound three-way action throughout the closed band  $|M| \leq \beta$ , although opposite nonzero signs are asserted only in the interior.

[thm:headline][thm:frontier] Under Assumption [ass:deploy], fix the observables  $(\mu_T, P_S, f_0, f_a, s)$  so  $M$  is determined, and let  $\beta \geq 0$ .

1. **Reduction.** For every  $P_T$ ,  $\text{sign } \Delta = \text{sign}(M + \gamma)$  (Lemma [lem:reduction]).
2. **Sufficiency.** If  $|M| > \beta$  and  $P_T \in C_\beta$ , then  $\text{sign } \Delta = \text{sign } M$ .
3. **Necessity.** If  $|M| < \beta$  (which requires  $\beta > 0$ ), there exist  $P_T^1, P_T^2 \in C_\beta$  with the same augmented-evidence law and opposite *nonzero* benefit signs; at  $|M| = \beta > 0$  the admissible drift  $\gamma = -\text{sign}(M)\beta$  yields  $\Delta = 0$ , and in the degenerate case  $M = \beta = 0$  the class  $C_0$  forces  $\Delta \equiv 0$ . Hence no *strict* benefit direction is uniformly supported by  $\text{Law}(\tilde{Z})$  over  $C_\beta$  whenever  $|M| \leq \beta$ .

4. **Strict-commitment iff.** A strict action in  $\{\text{adapt}, \text{freeze}\}$  is uniformly sound over  $C_\beta$  if and only if  $|M| > \beta$ ; on the closed band  $|M| \leq \beta$  (including  $M = \beta = 0$ , where  $\Delta \equiv 0$ ) abstention is the maximal sound action.

The population rule  $M > \beta \Rightarrow \text{adapt}$ ,  $M < -\beta \Rightarrow \text{freeze}$ ,  $|M| \leq \beta \Rightarrow \text{abstain}$  is the maximal sound certificate on  $C_\beta$ .

Part (i) is Lemma [lem:reduction]. For (ii), if  $M > \beta$  and  $|\gamma| \leq \beta$ , then  $M + \gamma > 0$ , so  $\text{sign } \Delta = \text{sign}(M + \gamma) = +1$ ; the negative case is symmetric. For (iii), pick  $\gamma_\pm \in [-\beta, \beta]$  with  $\text{sign}(M + \gamma_+) \neq \text{sign}(M + \gamma_-)$ , both nonzero, when  $|M| < \beta$ ; Lemma [lem:reduction] yields matched  $Z$  and opposite signs. At  $|M| = \beta$  the admissible  $\gamma = -\text{sign}(M)\beta$  gives  $\Delta = 0$ , still precluding a determined nonzero sign. Part (iv) combines (ii), (iii), and Proposition [prop:closed-band]. Maximality follows from Theorem [lem:nonid] in the interior and Proposition [prop:closed-band] on the boundary.

Region

---

$M > \beta$

$M < -\beta$

$|M| < \beta$

$|M| = \beta > 0$

$M = \beta = 0$

[thm:certificate][thm:cert] For any real-valued target benefit  $\Delta$ , suppose the benefit interval satisfies marginal coverage

$$P[|\hat{\Delta} - \Delta| \leq \varepsilon] \geq 1 - \alpha.$$

Define

$$g(Z) = \begin{cases} \text{adapt} & \hat{\Delta} - \varepsilon > 0, \\ \text{freeze} & \hat{\Delta} + \varepsilon < 0, \\ \text{abstain} & \text{otherwise.} \end{cases}$$

Then, marginally over the calibration randomness,

$$\begin{aligned} P[g(Z) = \text{adapt}, \Delta \leq 0] &\leq \alpha, \\ P[g(Z) = \text{freeze}, \Delta \geq 0] &\leq \alpha. \end{aligned}$$

On the event  $\{|\hat{\Delta} - \Delta| \leq \varepsilon\}$ , the condition  $\hat{\Delta} - \varepsilon > 0$  implies  $\Delta > 0$ , so a false adapt requires the complement of this event, which has probability at most  $\alpha$ . The freeze case is symmetric.

Exchangeability, or an explicit shift correction, is one route to this coverage assumption. Risk alignment is not required for the conditional-on-coverage implication.

[rem:fa-marginal] Theorem [thm:certificate] bounds the *marginal, unconditional* false-adapt and false-freeze probabilities ( $F A_u$ ). It does *not* bound the conditional rate  $F A_c = P[\Delta \leq 0 \mid \text{adapt}]$ , which we report empirically. Risk alignment (Definition [def:risk-

[align](#)) is required for the *frontier* identifiability claim; coverage alone certifies the *interval* rule above.

[cor:abstain-valid] If interval coverage—or the calibration assumptions supporting it (exchangeability, or an explicit shift correction)—cannot be justified on the deployment batch, Theorem [\[thm:certificate\]](#) does not apply, and committing to adapt is not protected at level  $\alpha$ ; the conservative action is abstain or freeze. If instead *risk alignment* (Definition [\[def:risk-align\]](#)) cannot be justified, the population-frontier interpretation and the transferability of the benefit estimator are unsupported, even though the interval implication of Theorem [\[thm:certificate\]](#) remains valid *conditional on coverage* (cf. Theorem [\[lem:nonid\]](#)).

## How the Results Fit Together

disagreement-region reduction  $\rightarrow$  matched-evidence ambiguity  $\rightarrow$  **Thm.** [\[lem:nonid\]](#) (abstention necessity)

$\rightarrow$  split-observable decomposition  $\text{sign } \Delta = \text{sign}(M + \gamma) \rightarrow$  **Thm.** [\[thm:headline\]](#) ( $|M| > \beta$  frontier)

$\rightarrow$  coverage condition  $\rightarrow$  **Thm.** [\[thm:certificate\]](#) (finite-sample certificate)

## Extensions and Deferred Results

Additional minimax, anytime-valid, multicandidate, and one-bit results are retained in the long manuscript (kbound.tex) and are not used by the short-paper claims. The saved iWildCam streaming script computes its betting increments from frozen and adapted window accuracies, which require target labels. We therefore retain that run only as a label-informed offline stress diagnostic; it is not a label-free KGA deployment result and no streaming empirical claim is made in this paper.

## Claim Scope

The population theorem is conditional on the declared class  $C_\beta$ , and the finite-sample guarantee is conditional on valid interval coverage. The theorem controls the marginal probabilities  $P(\text{adapt}, \Delta \leq 0)$  and  $P(\text{freeze}, \Delta \geq 0)$ ; it does not automatically control the conditional error among committed actions. The framework does not claim that  $\beta$  is identifiable from unlabeled deployment data, that the empirical radius  $\varepsilon$  estimates  $\beta$ , or that calibration coverage transfers to arbitrary unseen domains without an assumption or correction.

## KGA Method

### System Overview

KGA is the paper’s practical finite-sample method—a decision wrapper around a fixed adapter, not a new adaptation objective and not a numerical implementation of the population  $|M| > \beta$  rule. The wrapper is *adapter-interface agnostic*: it requires only that a

candidate can be proposed, evaluated on the batch, and rolled back. Its calibration is *adapter-specific*: the benefit model and radius are refit per dataset and per candidate adapter, and cross-adapter transfer of a fitted calibration is disallowed because it violates the false-adapt bound (Table 16). We fit the benefit estimator and its radius *out of fold*, so the data used to fit  $\hat{\Delta}$  and the data used to calibrate its residual are disjoint for every point. On the per-cell stress grids (CIFAR-10-C and the synthetic grids), for each cell  $i$  a gradient-boosted  $\hat{\Delta}_{-i}$  is trained on the other  $N - 1$  cells and evaluated on cell  $i$ , and  $\varepsilon$  is an upper empirical quantile of the leave-one-out residuals  $\{|\hat{\Delta}_{-i}(Z_i) - \Delta_i|\}_{i=1}^N$ —leave-one-condition-out cross-fitted empirical residual calibration, so no cell’s residual uses an estimator that saw it. On the natural-shift protocols (Camelyon17, iWildCam, Office-Home) the split is across domains:  $\hat{\Delta}$  and  $\varepsilon$  are fit once on a dev split and the untouched held-out target-domain conditions are scored a single time. At deploy we extract  $Z$  from an unlabeled batch and return adapt, freeze, or abstain (Algorithm [alg:kga]). Labels enter only through the calibration split; the deployment batch and held-out test scorer never use target labels for the adapter,  $\varepsilon$ , evidence, or rule selection. The coverage guarantee is split-dependent. The current released scorer uses the exact split-conformal rank  $\varepsilon = r_{(k)}$ ,  $k = \min\{n_{cal}, \lceil (n_{cal} + 1)(1 - \alpha) \rceil\}$ . Under exchangeability this supports finite-sample marginal coverage on a clean split. The archived benchmark JSONs, however, were generated by the earlier interpolated empirical quantile; they are therefore reported as empirical benchmark evidence rather than retroactively relabeled exact split-conformal runs. The per-cell grids set  $\varepsilon$  to the  $(1 - \alpha)$  empirical quantile of the leave-one-out residuals, so the *calibration-set* coverage is approximately nominal (realized 0.898 at nominal 0.90,  $\alpha = 0.10$ )—empirical calibration evidence, not an exact finite-sample statement; this is the standard jackknife radius, which is distribution-free only asymptotically under estimator stability; its formal finite-sample counterpart is the jackknife+ of Barber et al. (2021) at level  $1 - 2\alpha$ , which we note but do not implement. The decision rule’s false-adapt guarantee is stated under the coverage hypothesis (§5), which the empirical coverage approximately meets. This construction sits in a known landscape: weighted conformal corrects coverage under known covariate shift, adaptive conformal tracks coverage online, and beyond exchangeability the coverage gap is bounded by the total-variation drift of the calibration pairs, which is conceptually related to but mathematically distinct from our disagreement-region calibration budget  $\beta$ . The certificate’s marginal false-adapt control is risk control in the RCPS/Learn-then-Test lineage, specialized to the adapt/freeze/abstain loss; PAC prediction sets give set-valued analogues under covariate shift.

## Evidence Map and Benefit Estimator

The evidence map uses only unlabeled batches and model outputs, and is instantiated as two label-free panels matched to the two calibration regimes below. On the controlled stress grids (CIFAR-10-C, ImageNet-C, PACS) the base panel is an 11-dimensional vector computed from the frozen softmax  $p_0$  and the adapted softmax  $p_a$  on the adaptation batch: the mean predictive entropy and mean confidence of  $f_0$  and of  $f_a$ ; the normalized marginal (predicted-class) entropy of each; the entropy and marginal-balance drops between them; the fraction of adapted predictions above confidence 0.9 (a collapse indicator); the  $KL$  divergence between the adapted and frozen predicted-class marginals; and the  $\ell_2$  norm of

the adapter’s parameter update. On the natural-shift protocols (Camelyon17, iWildCam, Office-Home, RxRx1) a 16-dimensional panel adds distribution- and disagreement-oriented statistics computed from the frozen logits: entropy and confidence quantiles; the frozen/adapted prediction-disagreement rate; the entropy gap; a free-energy source  $\rightarrow$  target shift; a batch-vs-running BatchNorm-statistic  $KL$ ; an ATC-style threshold-accuracy estimate (its threshold fixed on *source* labels only, never target labels); and a source  $\rightarrow$  target confidence drop. The source-calibrated correctness score  $s$  of §4 is operationalized by the adapted-confidence and ATC-style features. KGA does not explicitly estimate the theoretical margin  $M$ ; it learns the benefit  $\hat{\Delta} = h_{\theta}(Z)$  directly from the full evidence vector  $Z$ .

The benefit model predicts  $\hat{\Delta} = h_{\theta}(Z)$  from labeled development conditions;  $h_{\theta}$  is a gradient-boosted regression tree (scikit-learn GradientBoostingRegressor, squared error, 250 trees, depth 2, learning rate 0.05, subsample 0.8, seed 0), refit *per dataset and per candidate adapter* rather than shared, so the estimator itself implies no cross-dataset transfer. The complete schema for both panels—exact per-feature formulas and families—is given in Appendix 14 (Tables 18 and 19), with per-adapter update hyperparameters in Table 20.

*Label-free evidence actually computed by KGA. The 11-dim base panel drives the stress grids; the natural-shift protocols use a 16-dim panel that adds the rows marked (nat.). Exact formulas and per-track subsets are in the configuration files.*

| Family               | Statistics                                                                                                     |
|----------------------|----------------------------------------------------------------------------------------------------------------|
| Frozen output $Z_0$  | mean entropy, mean confidence, normalized marginal-class entropy; entropy/confidence quantiles ( <i>nat.</i> ) |
| Adapted output $Z_a$ | mean entropy, mean confidence, normalized marginal entropy, frac. confidence $> 0.9$                           |
| Change $Z_{change}$  | entropy drop, marginal-balance drop, entropy gap                                                               |
| Disagreement         | frozen/adapted prediction-disagreement rate ( <i>nat.</i> )                                                    |
| Distribution drift   | adapted-vs-frozen marginal $KL$ ; free-energy shift, BN-statistic $KL$ , ATC/confidence drop ( <i>nat.</i> )   |
| Update behavior      | $\ell_2$ norm of the adapter parameter update                                                                  |

## Out-of-Fold Uncertainty Calibration

For calibration condition  $i$ , an estimator that did not train on  $i$  produces  $\hat{\Delta}_{-i}(Z_i)$  and residual

$$r_i = |\hat{\Delta}_{-i}(Z_i) - \Delta_i|.$$

The radius is a pre-specified upper residual quantile. On clean development/test splits, ordinary split conformal provides finite-sample marginal coverage under exchangeability. On stress grids, the reported radius uses leave-one-condition-out cross-fitted empirical residual calibration; its observed coverage does not imply the same finite-sample

guarantee as split conformal, and jackknife+ is not claimed. We therefore report the calibration design and guarantee level separately for each track.

**Require:** Frozen  $f_0$ ; adapter  $A$ ; batch  $X_{1:m}$ ;  $\hat{\Delta}$ ,  $\varepsilon$ ,  $\alpha$

**Ensure:** Decision  $g \in \{\text{adapt}, \text{freeze}, \text{abstain}\}$

$f_a \leftarrow A(f_0, X_{1:m})$

$Z \leftarrow \phi(X_{1:m}, f_0, f_a)$

$\hat{\Delta} \leftarrow \hat{\Delta}(Z)$ ;

$L \leftarrow \hat{\Delta} - \varepsilon$ ;  $U \leftarrow \hat{\Delta} + \varepsilon$


**if**  $L > 0$  **then**  $g \leftarrow \text{adapt}$

**else if**  $U < 0$  **then**  $g \leftarrow \text{freeze}$

**else**  $g \leftarrow \text{abstain}$

**end if**

**return**  $g$

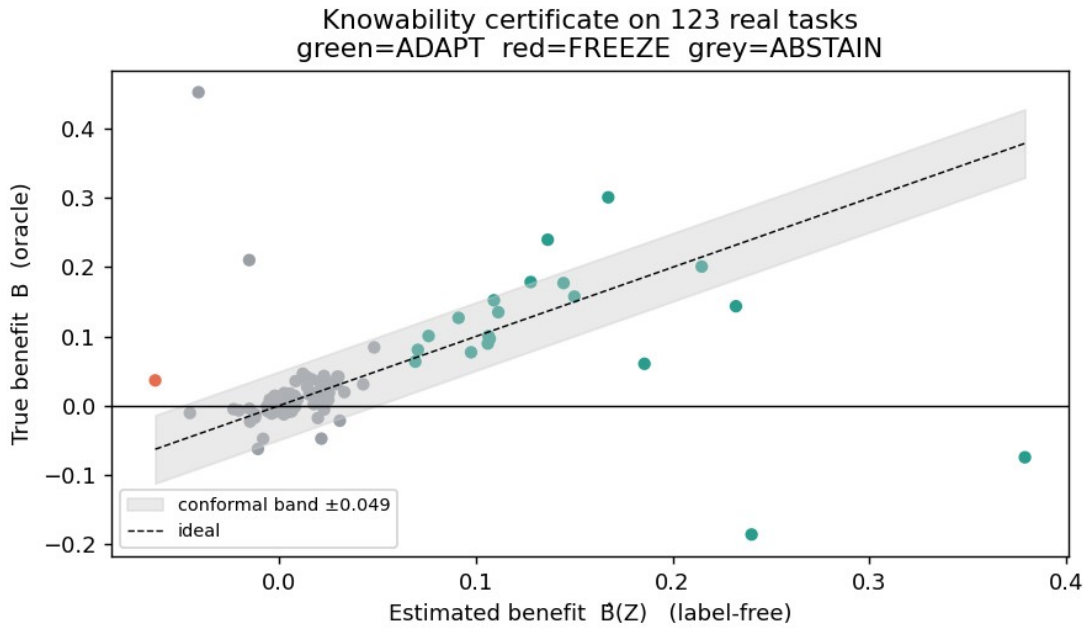

**The certificate rule in one picture.** KGA estimates the label-free benefit  $\hat{\Delta}(Z)$  and forms an interval  $\hat{\Delta} \pm \varepsilon$ : if the interval is entirely positive it adapts, if entirely negative it freezes, and otherwise it abstains. The vertical axis here uses true benefit only for offline audit; deployment decisions use only unlabeled evidence and the pre-calibrated radius.

On the good event  $|\hat{\Delta} - \Delta| \leq \varepsilon$ , committing adapt only when  $L > 0$  implies  $\Delta > 0$  (Theorem [thm:certificate]). The implication requires measurable marginal coverage; exchangeability or shift correction is used to justify coverage, while risk alignment is relevant to the population interpretation and estimator transfer. No target labels are used at deployment.



## Population Frontier versus Empirical Certificate

KGA’s commit boundary is not a swept hyperparameter, but the population frontier and the empirical radius must be kept distinct. The *population* frontier of Theorem [thm:headline] says a strict action is uniformly sound over  $C_\beta$  iff the population margin  $|M|$  exceeds the declared budget  $\beta$ . The realized drift satisfies  $|\gamma| \leq \beta$  but is unobserved. KGA instead learns  $\hat{\Delta}$  from  $Z$  and uses a finite-sample residual-coverage radius  $\varepsilon$ , fixed before target-test scoring. The radius neither estimates nor substitutes for  $\beta$ ; conditional on valid coverage it controls marginal decision errors without requiring risk alignment. Confidence-thresholding (ATC) and agreement-trend selection (AGL) fit a scalar against a labeled or held-out signal and predict *accuracy*; KGA certifies a strict benefit direction with a calibrated interval and, unlike a committal thresholded estimator, abstains where its calibrated interval crosses zero—consistent with the structural region studied by Theorem [lem:nonid], though finite-sample abstentions may also reflect sampling uncertainty, estimator inadequacy, or calibration conservatism. The impossibility construction, not a tuned cutoff, is what separates KGA from “estimate accuracy, then threshold.”

## Selecting and Auditing the Drift Budget

The drift budget  $\beta$  is part of the declared deployment class, not a target-test-tuned hyperparameter. It may be justified from historical domain calibration gaps, a documented domain assumption, or an explicit stress envelope. Sensitivity analysis should report how decisions change over a pre-specified range of budgets. A smaller  $\beta$  asserts stronger calibration transfer and increases commitment; a larger  $\beta$  widens the abstention region. When no credible upper bound is available, the population frontier does not provide a robust sign certificate. Reporting  $\beta=0$  is then only a zero-drift plug-in analysis, not an assumption-free or conservative guarantee.

## Deployment Semantics and Failure-Safe Behavior

The shadow-state workflow is: (1) checkpoint the active model; (2) propose adaptation on a temporary copy; (3) evaluate frozen and candidate outputs; (4) extract  $Z$ ; (5) compute  $\hat{\Delta} \pm \varepsilon$ ; (6) commit or roll back; and (7) log the configuration, evidence, interval, and action. Abstention applies to the adaptation update, not to prediction. Adapt commits the candidate; freeze rolls it back; and abstain retains the frozen state while recording that evidence was insufficient rather than certifiably harmful. The implementation should automatically freeze or abstain when evidence is missing, the batch is too small, a checkpoint or adapter configuration differs from calibration, the evidence lies outside calibration support, numerical values are invalid, or no valid radius is available. In the reference implementation (kbound\_pkg), the gate is applied per batch (KGA.decide\_from\_batch); on abstain or freeze the adaptation optimizer scales the candidate update by  $abstain_{scale}=0$ , i.e. the update is skipped and the frozen state  $f_0$  is served—this is the rollback mechanism. The failure-safe defaults instantiate the diagnostics of Table 17: abstain when the batch is smaller than the calibration batch size, when  $Z$  lies outside calibration support, when a checkpoint or adapter-configuration hash



differs from the calibrated one, or when the radius or evidence is missing or numerically invalid. In continual operation the last certified state replaces  $f_0$  as the fallback.

## Computational Cost

KGA cannot avoid the cost of proposing an update because candidate adaptation includes forward and backward computation before commitment. The controller’s *added* cost is measured by a controller-only microbenchmark (Table 6): evidence extraction 0.074 ms and benefit-model evaluation 0.127 ms per decision (0.20 ms total), plus one model copy (44.8 MB, ResNet-18/CIFAR) for rollback; the benefit model itself is 195 KB. Candidate adaptation and inference are unchanged by KGA— $f_a$  is evaluated regardless—and are expected to dominate end-to-end latency, but this microbenchmark does not measure them: a complete end-to-end component profile (frozen inference, candidate adaptation and inference, rollback time, total window latency) remains pending (App. 19).

*KGA controller added cost (ResNet-18/CIFAR; controller-only microbenchmark). Candidate adaptation/inference are unchanged by KGA and are not measured here; the end-to-end component profile is pending (App. 19).*

### Component

Evidence extraction (per batch)

Benefit-model evaluation (per decision)

### Controller added latency

Rollback model copy (memory)

Benefit model size

## Experimental Setup

### Research Questions

The experiments address seven questions: **RQ1** whether the measured commit transition follows the theoretical frontier; **RQ2** whether the interval controls marginal false adaptation; **RQ3** whether KGA beats both fixed policies in mixed detectable regimes; **RQ4** whether it prevents damage on held-out natural shifts; **RQ5** whether it improves over simple and neighboring label-free gates; **RQ6** which evidence and calibration choices matter; and **RQ7** what computational overhead the controller adds.

### Datasets and Shift Taxonomy

The evaluation separates controlled corruption/composition stress, large-scale corruption, natural institutional or geographic shifts, domain generalization, and low-margin diagnostic transfers. This taxonomy matters because a router can beat both fixed policies only when the optimal action varies across conditions and that variation is detectable from label-free evidence. The nine tracks draw on CIFAR-10-C, ImageNet, the WILDS

Camelyon17, iWildCam, and RxRx1 shifts , Office-Home , PACS via DomainBed , and CIFAR-10.1 ; models build on RobustBench checkpoints with PyTorch and scikit-learn .

## Track

CIFAR-10-C stress

ImageNet-C noise

Camelyon17

iWildCam

Office-Home

RxRx1

PACS

ImageNet-R

CIFAR-10.1

## Models, Adapters, and Leakage Control

For every track, the source checkpoint, candidate adapter, update mode, learning rate, number of steps, batch construction, adapted parameter subset, and random seeds must be declared before held-out scoring. Adapter selection, evidence selection, benefit-model fitting, and residual calibration use development data only. All choices are frozen before the target test cells are scored once; target labels are opened afterward solely for offline audit. The calibration and scoring configuration is uniform across tracks except where noted in Table 7.

*Per-track calibration and scoring configuration ( $\alpha=0.10$  throughout; benefit estimator family and calibration recipe are used across tracks, with parameters refit per dataset and candidate adapter, §5). Backbones: ResNet-18 (CIFAR), ResNet-50 (ImageNet-C); the natural-shift backbones follow the WILDS/DomainBed defaults per track.*

| Track             | Calibration unit               | Radius rule                   | Test unit            |
|-------------------|--------------------------------|-------------------------------|----------------------|
| CIFAR-10-C stress | grid cell (leave-one-cell-out) | LOO jackknife<br>$q_{0.9}$    | $5 \times 432$ cells |
| ImageNet-C        | grid cell (leave-one-cell-out) | LOO jackknife<br>$q_{0.9}$    | 27 cells             |
| PACS (LODO)       | source-domain cells            | LOO jackknife<br>$q_{0.9}$    | 108 cells/target     |
| Camelyon17        | dev $\{0, 1\}$                 | archived OOF empirical radius | test $\{2, 3, 4\}$   |
| iWildCam H v2     | calibration $\{0\}$            | archived OOF empirical radius | held-out $\{1\}$     |
| Office-Home M v2  | calibration $\{0, 1\}$         | archived OOF                  | target test          |

|         |                                  |                                     |                        |
|---------|----------------------------------|-------------------------------------|------------------------|
|         |                                  | empirical<br>radius                 | $\{0, 1\}$             |
| RxRx1 J | development<br>$\{0, \dots, 4\}$ | archived OOF<br>empirical<br>radius | test $\{5, \dots, 9\}$ |

Exact per-adapter update settings (optimizer, steps, learning rate, and the mild/aggressive operating points) are tabulated per track in Appendix 14, Table 20.

## Baselines

We distinguish fixed policies (always-freeze and always-adapt), an offline per-condition oracle, simple label-free gates (confidence, entropy, drift/KL, and ATC-style), KGA without its radius, and neighboring methods or ports inspired by POEM and AETTA. Each comparison must state whether the baseline is an official implementation, a faithful reimplement, or a protocol-matched port.

## Metrics and Statistical Testing

The primary decision metrics are regret-to-oracle, marginal false-adapt  $F A_u = P(\text{adapt}, \Delta \leq 0)$ , conditional false-adapt  $F A_c = P(\Delta \leq 0 \mid \text{adapt})$ , adapt rate, and decision coverage  $P(\text{adapt or freeze})$ . Accuracy or AUROC is reported as the task metric. The theorem controls  $F A_u$  under its assumptions;  $F A_c$  is descriptive. A beats-both verdict requires lower regret than both fixed policies under the declared statistical criterion and  $F A_u \leq \alpha$ . Paired bootstrap confidence intervals, their resampling unit, seed aggregation, and Holm correction are declared per comparison family.

## Evidence-Status Policy


**Locked** results trace to raw cells/seeds and a frozen aggregate; **reconciled** results correct a prior interpretation using raw records; **provisional** summaries require canonical replay; and **diagnostic** runs are complete but deliberately not promoted. Only locked and reconciled rows support the empirical headline. Every evidence-tier cell in the result tables begins with one of these four labels; qualifiers (seed counts, lock type, known caveats) follow in parentheses.

## Hardware and Software

Runs use Python 3.12, PyTorch 2.5.1, and scikit-learn for the benefit estimator. Accelerator and checkpoint details are recorded per run manifest rather than pooled into one hardware claim: CIFAR experiments used the saved ResNet-18 setup; the authoritative ImageNet-C result used ResNet-50 on seed 0. Hardware affects runtime but not the decision definitions or replayed metrics.


## Results

The results are organized by regime rather than by dataset prestige. Controlled mixed regimes test policy improvement, one-sided natural shifts test no-harm behavior, and low-margin transfers test whether the method declines unsupported claims.

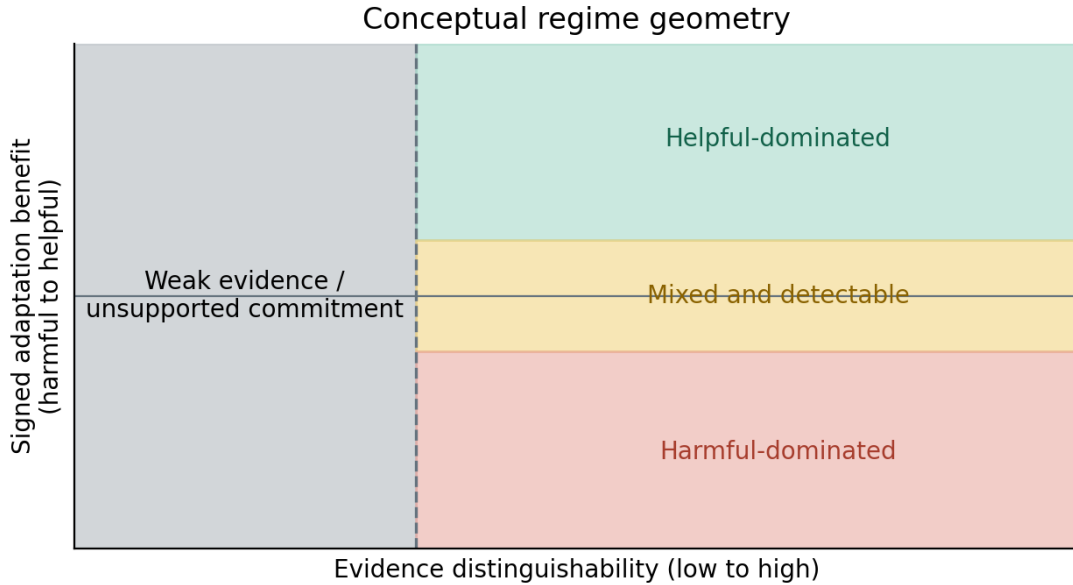

## Synthetic validation of the frontier

Before the real-data tracks we validate the theory directly on synthetic ground truth, where the observable margin  $M$ , the unobserved drift  $\gamma \sim U(-\beta, \beta)$ , and hence the true benefit sign  $\Delta = \text{sign}(M + \gamma)$  are all controlled. In the real-data tracks that follow,  $\beta$  is *not* numerically supplied to KGA: the empirical decision uses  $\hat{\Delta} \pm \varepsilon$ , and the  $\beta$ -frontier is evaluated directly only in this synthetic study. Evidence is fed to the reported cross-fitted rule (leave-one-out gradient-boosted  $\hat{\Delta}$  with an empirical residual radius, §5); nothing is hand-tuned. Three predictions hold (Fig. 4;  $\alpha = 0.10$ ). **(i) Recovery:**  $\hat{\Delta}$  tracks  $\Delta$  at 90.0% empirical coverage, matching the nominal target in this simulation. In this construction unresolved drift dominates the benefit-estimation residual, causing the calibrated radius to approximately track  $\beta$ . **(ii) Frontier** (Thm [thm:headline]): the commit rate jumps from 6.5% for  $|M| < \beta$  to 96.7% for  $|M| > \beta$ —a transition at the predicted boundary—and the committed sign is correct 99.3% of the time. **(iii) Certificate** (Thm [thm:certificate]): the unconditional false-adapt rate stays under budget for every  $\beta \in \{0.05, \dots, 0.20\}$  ( $F A_u \leq 0.014 \ll \alpha$ ). The frontier is not imposed; it appears because the synthetic residual scale is controlled by the deliberately hidden drift.

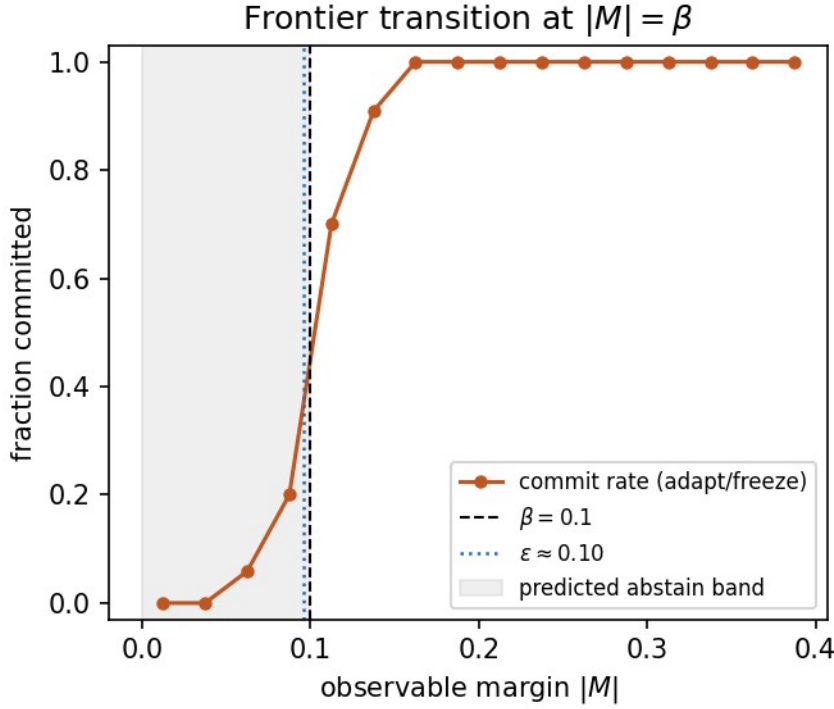

**Measured benefit-sign frontier** (synthetic ground truth, archived cross-fitted rule). The commit rate transitions sharply from abstention to adapt/freeze near  $|M| = \beta$ ; the calibrated radius  $\epsilon$  (dotted) approximately tracks  $\beta$  in this construction. Companion panels—estimator recovery and  $F A_u \leq \alpha$  across  $\beta$ —in [fig\\_frontier\\_recovery.png](#), [fig\\_frontier\\_fa\\_coverage.png](#).

### CIFAR-10-C stress grid (5 seeds)


The per-corruption suite is helpful-dominated; the *stress grid* crosses severity, batch size, composition, and update aggressiveness (432 conditions/method, ResNet-18; pre-registered as Protocol A; seeds 0–4). Harmful base rates are 34 % (Tent) and 27 % (EATA). KGA **beats both** trivial policies for Tent and EATA at 0 % false-adapt (Table 8). Among harmful cells KGA adapts 0 and freezes them; among helpful cells it adapts almost all; on marginal cells it abstains. For both Tent and EATA, the regret gaps to *both* fixed policies are positive with 95 % bootstrap CIs excluding zero, Holm-corrected over the comparison family, at false-adapt 0 / 2160.<sup>1</sup> The saved SAR aggregate is not promoted: a later seed-0 replacement causes the current raw tree to replay different SAR fixed-policy regrets, so SAR coverage and verdict require a clean five-seed rebuild. The Pareto panel in

<sup>1</sup> Design-based intervals, resampling the pre-registered mixing-ratio distribution of the stress-grid design (Protocol A; the 11-point Pareto over harmful fraction,  $N_{boot} = 5000$ ): Tent +0.019 [0.011, 0.026] vs. always-adapt, +0.080 [0.052, 0.107] vs. always-freeze; EATA +0.015 [0.009, 0.021] and +0.075 [0.049, 0.100]. A conventional paired per-condition bootstrap over the 432 realized conditions returns the same Tent/EATA verdict.


Fig. [fig:decisive] is retained as archived decision geometry; the promoted result is limited to Tent and EATA.

CIFAR-10-C stress grid (432 conditions/method, five seeds,  $\alpha=0.1$ , Protocol A). “coverage” is decision coverage  $P[\text{adapt} \vee \text{freeze}]$ ; both fixed policies commit on every cell. SAR is excluded because the current raw tree no longer replays its archived aggregate after a seed-0 replacement.

| candidate | policy         |
|-----------|----------------|
| Tent      | always-adapt   |
|           | always-freeze  |
|           | <b>K-Bound</b> |
| EATA      | always-adapt   |
|           | always-freeze  |
|           | <b>K-Bound</b> |

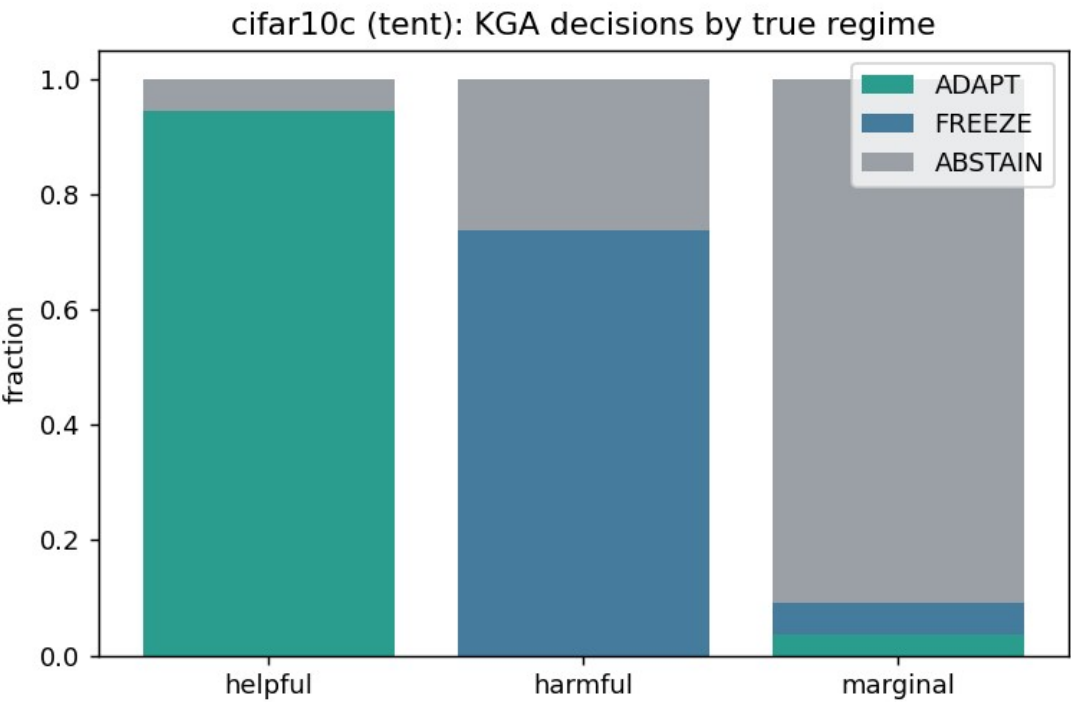

(a) decisions by true regime

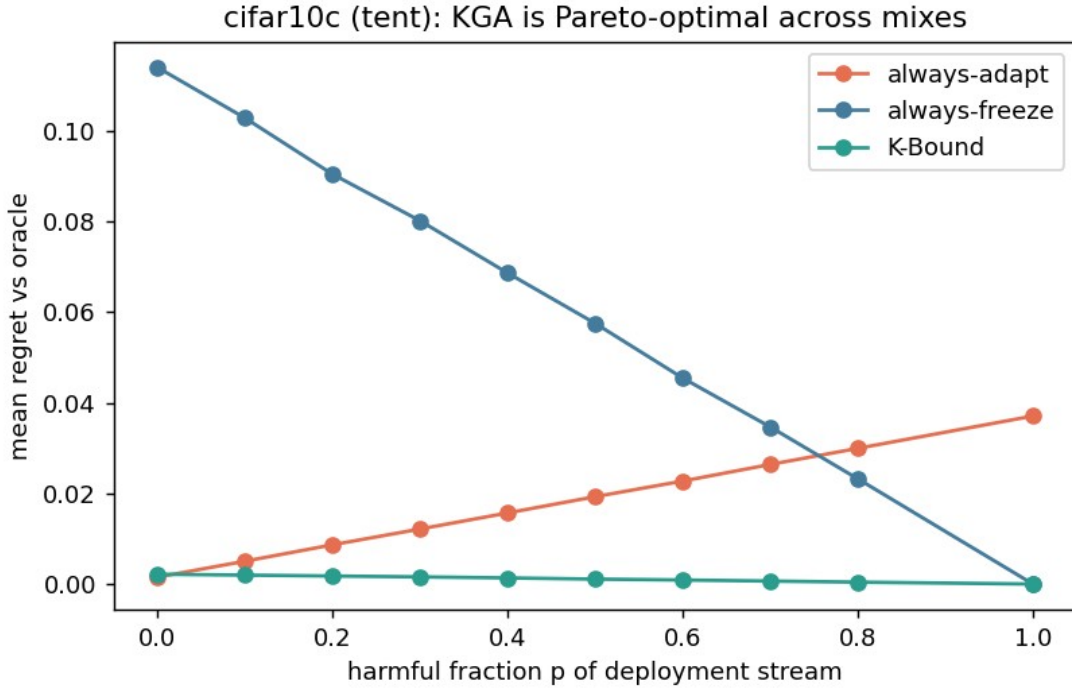

(b) regret as harmful fraction changes

### Decision-baseline comparison: empirical safety of the calibrated certificate

KGA’s claim goes beyond “better than always-adapt/always-freeze”: it is better than *simple label-free decision rules* under the same locked protocol. On the CIFAR-10-C stress grid (Tent candidate, identical cells), we score six rules from the same evidence (Table 9): a confidence gate (adapt iff adaptation raised mean confidence), an entropy gate (adapt iff it lowered entropy—Tent’s own objective), a drift/KL threshold, an ATC-style accuracy-prediction gate, KGA *without* its conformal radius (adapt iff  $\hat{\Delta} > 0$ ), and the full certificate. Only KGA is derived from a coverage-based false-adapt certificate; on this stress grid the leave-one-cell-out radius provides strong *empirical* coverage, not the exact distribution-free validity of clean split conformal or jackknife+. It attains zero observed  $F A_u$  on this grid while staying near-oracle on regret (the radius-free variant keeps  $F A_u = 0.049 < \alpha$  empirically, but with no such guarantee). The confidence/entropy gates false-adapt on  $\sim 74\%$  of harmful cells; the drift threshold, tuned to the budget, degenerates to always-freeze. The KGA-without-radius row isolates the radius: removing it lowers regret slightly ( $0.0017 \rightarrow 0.0004$ ) but raises  $F A_u$  from 0 to 0.049 (to 0.141 on harmful cells): the radius is what turns a good benefit *estimate* into a false-adapt *guarantee*. Reproduced from the locked per-cell dump (artifact manifest, App. 21).

**Decision-baseline comparison, CIFAR-10-C stress grid** (Tent candidate,  $n=432$  cells, 149 harmful,  $\alpha=0.1$ ). Lower regret and lower  $F A_u$  are better. Only the conformal certificate keeps  $F A_u=0$  on the full grid and on harmful cells while staying near-oracle.

Decision rule



confidence gate  
entropy gate  
drift/KL gate  
ATC-style gate  
KGA (no radius)  
**KGA (certificate)**

†Degenerate: the budget-tuned drift gate never adapts (adapt-rate 0), so its “0 false-adapt” is just always-freeze (regret 0.123).

### Mixed head-to-head vs. POEM-/AETTA-style baselines (pre-registered)

The stress-grid wins above beat the *trivial* policies always-adapt and always-freeze. A harder question is whether KGA improves over strong protocol-matched label-free decision baselines inspired by POEM and AETTA, on a *mixed* harmful+helpful stream. We pre-registered the benchmark, metrics, and WIN/TIE/LOSE criterion *before* computing any number (). All six policies consume the *same* logged per-condition signals  $Z$  and benefit  $B$  from the locked CIFAR-10-C stress grid (Tent, 432 conditions/seed, five seeds; harmful fraction  $\approx 33\%$ , i.e. the always-adapt  $F A_u$  of Table 10); only the decision rule differs. The competitors are *protocol-matched POEM-style and AETTA-style baselines*: ports of the published protectors onto this protocol with documented simplifications (batch-summary entropy rather than per-sample streams). Official per-sample POEM and dropout-based AETTA reproduction remains a camera-ready faithfulness check.

**Verdict: WIN.** KGA lowers mean regret-to-oracle vs. both ported baselines with paired-bootstrap 95 % CIs entirely below zero and Holm correction ( $\alpha=0.05$ ), at  $F A_u=0 \leq \alpha$  (Table 10). The ported POEM-/AETTA-style baselines false-adapt at  $\sim 24\text{--}25\%$  on the same stream, consistent with the absence of an explicit marginal false-adapt certificate under this ported protocol. Secondary pooled sets (Tent+EATA, EATA alone) yield the same WIN verdict, and a separate pre-registered recomputation pipeline (paired bootstrap  $10^4$ ) replicates all three configurations, with both regret-gap CIs below zero in each and  $F A_{\text{kga}}=0$  versus 11–33 % for the competitors; both artifacts are indexed in the manifest (App. 21).

*Pre-registered mixed head-to-head on the locked CIFAR-10-C stress stream. POEM/AETTA rows are protocol-matched style ports, not official reproductions. All policies use the same cross-fitted evaluation cells, candidate adapter, logged label-free evidence, regret-to-oracle metric, and unconditional false-adapt metric.*

policy

---

always-adapt  
always-freeze  
POEM-style  
AETTA-style

KGA

oracle

Baseline faithfulness.

Table [tab:baseline-faithfulness] records exactly what each port matches (evidence, candidate, cross-fitted evaluation cells, metrics) and what it does not claim (POEM's per-sample betting process; AETTA's dropout estimator); the comparison claim is limited to this locked protocol-matched setting.

Baseline

POEM-style

AETTA-style

KGA

ImageNet-C SAR (mechanism-faithful)

On ImageNet-C noise (ResNet-50, 27 cells: three noise corruptions  $\times$  severities  $\{1, 3, 5\} \times$  three batch-composition regimes (iid, imbalanced, single-class), seed 0, full-scale), SAR is harmful on 14.8% of cells under a mechanism-faithful re-implementation (SAM, recovery reset, EMA) at the learning rate shared across candidates. Always-adapt drops to 0.379 accuracy while KGA reaches 0.431, **beating both** trivial policies (regret 0.0108 vs 0.0625/0.0319). The gap to the better fixed policy (always-freeze) has a 95% paired-bootstrap CI of  $[-0.032, -0.011]$ ; the gap to always-adapt is  $[-0.115, -0.001]$ . Both intervals are regenerated from the saved 27 cells, so ImageNet-C SAR is a paired-bootstrap beats-both rather than a point estimate. No multiple-comparison correction is claimed for this isolated table. EATA stays helpful-dominated (KGA ties always-adapt); on Tent the harmful regime now dominates (63% of cells) and KGA abstains to always-freeze (Table 11). Under the same logged conditions, an ATC-style confidence gate false-adapts on the harmful SAR cells—it adapts wherever confidence is high, which is exactly where SAR collapses—while KGA abstains on them, so the certificate beats not only the two fixed policies but a simple label-free decision gate under the same protocol. The result uses our mechanism-faithful SAR reimplementation at a shared learning rate; SAR's official gentler schedule is left as a robustness check, so the claim is about this harmful-SAR operating point rather than all SAR configurations.

*ImageNet-C, mechanism-faithful SAR (27 cells: 3 noise corruptions, ResNet-50,  $\alpha=0.1$ ); full-scale run (2026-07-09) superseding the earlier 36-cell provisional configuration.*

candidate

Tent

EATA


SAR

## Natural Shifts and Consolidated Summary

All benchmark tracks use the same decision target: the adaptation benefit  $\Delta = R(f_0) - R(f_a)$ , evaluated against the same per-condition oracle, always-adapt, and always-freeze policies. The candidate adapter is locked using development data. Evidence  $Z$ , the benefit estimator  $\hat{\Delta}$ , and radius  $\varepsilon$  are then frozen before scoring the declared test cells; test labels are used only after decisions for offline regret and false-adapt audit. Stress grids use leave-one-cell-out residuals; semantic domain-shift tracks use a dev/test split. We report  $F A_u = P[\text{adapt}, \Delta \leq 0]$  and do not interpret  $F A_c$  as a certificate.

### Evidence tiers.

Tier labels follow the four-level policy of §6.6; only locked and reconciled rows support the empirical headline.

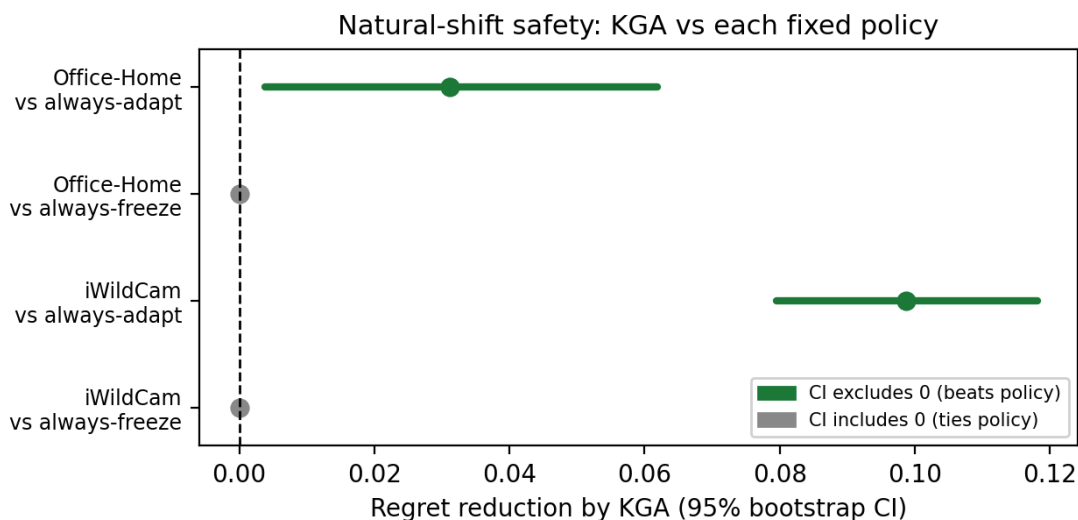

**Natural-shift no-harm, not beats-both.** Positive values favor KGA. Office-Home and iWildCam beat always-adapt but tie always-freeze under the corrected out-of-fold replay; the intervals are paired held-out-condition bootstrap intervals from the saved OOF bootstrap lock (App. 21).

Multi-seed stability (Camelyon17).

The one natural-shift track with per-condition logs at multiple seeds is Camelyon17 (4 seeds, 9 composition-stress conditions/seed). Aggregating the deployed per-seed decisions (locked per-seed artifacts, App. 21) shows the no-harm outcome is *candidate-dependent* and stable only for the milder adapter (Table 12): with Tent, KGA is **stable no-harm** across all four seeds—it ties always-freeze, beats always-adapt, at  $F A_u=0$  every seed; with EATA the margin is inconclusive; and with the aggressive helpful-dominated SAR arm KGA over-freezes (worse than always-adapt,  $F A_u$  up to 0.11), consistent with the candidate dependence seen elsewhere. Per-seed multi-seed replays for iWildCam, Office-Home, and RxRx1 are single-run in the current artifacts and remain future work.

**Multi-seed no-harm (Camelyon17, seeds 0–3).** *Regret mean±std across seeds;  $F A_u$  is the per-seed maximum. Reproduced from the committed per-seed logs.*

candidate

Tent

EATA

SAR

Weak-Evidence and Negative Regimes

ImageNet-R and CIFAR-10.1 remain diagnostics. Their outcomes are consistent with weak evidence, low margin, estimator inadequacy, or calibration-transfer failure; they do not by themselves prove structural non-identifiability. PACS is also incomplete relative to its three-seed registration.

Physical-Study Pre-registration

We preregister a two-phone physical package-inspection study with distinct source, calibration, held-out, and replication sessions. The protocol, leakage checks, and outcome-free result templates are provided in Appendix 18. No physical result is claimed until fresh sessions pass the repository’s fail-closed publication gate; mock or reconstructed clips are never admissible evidence.

Constructed Heterogeneous Routing

The three-source OOF mixture combines separately calibrated Office-Home, iWildCam, and Camelyon17 conditions. It demonstrates routing value under a researcher-constructed heterogeneous stream, not single-dataset natural-shift dominance or transfer to unseen shift types.

**Primary numeric evidence used for empirical claims.** *The three-source row is a constructed routing mixture, not a natural-transfer result.*

| Track           | Unit           | Status     |
|-----------------|----------------|------------|
| CIFAR-10-C Tent | $5 \times 432$ | locked; CI |

|                             |                |                                                     |
|-----------------------------|----------------|-----------------------------------------------------|
| CIFAR-10-C EATA             | $5 \times 432$ | BB, $F A_u = 0$<br>locked; CI<br>BB, $F A_u = 0$    |
| ImageNet-C SAR              | 27 cells       | locked<br>(single seed);<br>paired-<br>bootstrap BB |
| Camelyon17 OOD              | $n = 18$       | reconciled;<br>no-harm                              |
| RxRx1 J                     | $n = 60$       | locked; no-<br>harm                                 |
| Three-source OOF<br>mixture | $n = 143$      | locked; CI BB<br>(constructed<br>)                  |

### Consolidated Claim and Guarantee Accounting

| Statement                                                     | Status              | Requirement                                                                               |
|---------------------------------------------------------------|---------------------|-------------------------------------------------------------------------------------------|
| Abstention needed in matched-evidence opposite-benefit worlds | theorem             | stated model class                                                                        |
| $F A_u \leq \alpha$ (unconditional false-adapt)               | theorem             | measurable marginal coverage;<br>exchangeability/shift correction only justifies coverage |
| $F A_c \leq \alpha$ (conditional false-adapt)                 | <b>not claimed</b>  | report $F A_c$ descriptively only                                                         |
| Nine-track panel                                              | <b>accounting</b>   | locked/reconciled/<br>provisional tiers shown explicitly                                  |
| Stress-grid beats-both (Tent/EATA)                            | locked              | locked Protocol A v1 stress grid                                                          |
| ImageNet-C SAR paired-bootstrap beats-both                    | locked (1 seed)     | source-backed 27-cell noise grid; both paired CIs exclude 0                               |
| Natural safety (Camelyon17, RxRx1)                            | reconciled / locked | raw OOD/test artifacts                                                                    |
| Office-Home and iWildCam OOF summaries                        | reconciled          | OOF bootstrap lock                                                                        |
| Three-source mixed routing aggregate                          | locked              | constructed OOF mixture, not transfer                                                     |
| Universal improvement                                         | <b>not</b>          | impossible in general                                                                     |

|                                              |                |                                                 |
|----------------------------------------------|----------------|-------------------------------------------------|
|                                              | <b>claimed</b> |                                                 |
| $\varepsilon$ estimates drift budget $\beta$ | <b>false</b>   | $\beta$ is declared; $\varepsilon$ is empirical |

## Ablations and Sensitivity

### Value of the Uncertainty Radius

Table 9 isolates the radius: KGA without the radius has lower point regret but a higher empirical false-adapt rate, whereas the full certificate sacrifices coverage to eliminate observed harmful commitments on the locked grid. This comparison separates benefit-prediction quality from certification.

### Alpha, Evidence, Estimator, and Transfer Sensitivity

All ablations reuse the logged CIFAR-10-C stress evidence (per-condition  $Z$  and true benefit  $B$ ; 432 conditions/candidate, seed 0) and the deployed rule with an *exact-rank* empirical residual radius  $\varepsilon = r_{(k)}$ ,  $k = \lceil (n+1)(1-\alpha) \rceil$  (locked exact-rank ablation artifact with input hashes, App. 21). At the deployed operating point (Tent,  $\alpha=0.10$ ) the harness reproduces the locked gate row of Table 9 (regret 0.0017,  $F A_u=0$ , adapt 0.51, coverage 0.69).

**(i) Safety level  $\alpha$ .** Sweeping  $\alpha$  (Table 14) trades decision coverage for regret while holding  $F A_u=0$  at every certified level; only the radius-free variant breaks the guarantee ( $F A_u=0.051$ ). **(ii) Estimator.** Swapping the benefit regressor (Table 15) leaves the false-adapt guarantee intact: gradient boosting, random forest, and ridge all keep  $F A_u \leq 0.002$ ; a small MLP over-abstains on this small calibration set. **(iii) Evidence family.** Dropping any single evidence family (frozen, adapted, change, drift, or update) keeps regret in  $[0.0015, 0.0019]$  at  $F A_u=0$ : no single family is load-bearing. **(iv) Cross-adapter transfer.** Fitting the benefit model on one adapter and applying it to another (Table 16) *breaks* the false-adapt bound in most directions (SAR  $\rightarrow$  Tent  $F A_u=0.25$ ), which is exactly why the deployed method refits per adapter. **(v) Drift budget  $\beta$ .** The population-frontier  $\beta$  sweep is the synthetic ground-truth validation of §7.1, kept distinct from the empirical radius  $\varepsilon$ .

*Ablation (i): safety-level  $\alpha$  sweep (exact-rank radius), CIFAR-10-C Tent ( $n=432$ ).  $F A_u=0$  at every certified  $\alpha$ ; only the radius-free row breaks it.*

$\alpha$

0.01

0.05

0.10

0.20

no radius

*Ablation (ii): benefit estimator (exact-rank radius), CIFAR-10-C Tent ( $\alpha=0.10$ ). The radius keeps  $F A_u \approx 0$  regardless of estimator.*

estimator

gradient boosting

random forest

ridge (linear)

small MLP

*Ablation (iv): cross-adapter transfer (exact-rank radius,  $\alpha=0.10$ ). Transferring one benefit model across adapters violates  $F A_u \leq \alpha$  in most directions—per-adapter calibration is required.*

fit → apply

Tent → EATA

EATA → Tent

Tent → SAR

EATA → SAR

SAR → Tent

SAR → EATA

## Discussion and Failure Modes

### Why Natural Shifts Mainly Produce No-Harm

A single natural benchmark is often one-sided: adaptation helps almost everywhere or harms almost everywhere. In the first case, always-adapt is already near-oracle; in the second, always-freeze is near-oracle. A three-way router gains a strict margin over both fixed policies only when helpful and harmful conditions coexist and the evidence distinguishes them. Natural no-harm results and mixed-regime wins are therefore different operating points of the same decision geometry.

### Four Sources of Abstention

Not every abstention has the same interpretation. *Structural non-identifiability* means opposite-benefit worlds share the same admissible evidence law. *Finite-sample uncertainty* means the sign is identifiable in principle but the interval still crosses zero. *Estimator inadequacy* means the chosen model fails to extract an available signal. *Calibration failure* means a development relationship does not transfer to deployment. We distinguish these causes throughout the evaluation rather than treating every null result as evidence of structural unknowability.

### Operational Failure Modes

Table 17 maps each deployment failure to a diagnostic and a safe response.



### *Deployment failures, diagnostics, and safe responses.*

| Failure                           | Diagnostic                           | Safe response                         |
|-----------------------------------|--------------------------------------|---------------------------------------|
| Calibration transfer fails        | support/residual audit               | recalibrate, widen radius, or abstain |
| True drift exceeds $\beta$        | external domain monitoring           | revise class/budget; freeze meanwhile |
| Evidence out of support           | distance or density check in Z-space | abstain                               |
| Adapter/checkpoint changed        | configuration hash mismatch          | require recalibration                 |
| Batch too small                   | minimum-size rule                    | wait for more data or freeze          |
| Continual state accumulates error | checkpoint/stream monitor            | rollback to last certified state      |
| Missing/invalid evidence          | schema and numerical validation      | freeze                                |

## When to Deploy K-Bound

K-Bound is most valuable when harmful updates are plausible, the cost of a bad commit is high, a frozen fallback is available, and historical or structural information supports calibration. It is less useful when adaptation is uniformly benign, when no credible drift class or calibration set exists, or when the candidate update cannot be evaluated and rolled back safely.

## Limitations

**Scope of empirical wins.** On the stress grid KGA beats both for Tent/EATA and ties SAR (Table 8); on ImageNet-C the pattern flips by candidate—Tent/EATA are robust while SAR collapses and KGA beats both under a mechanism-faithful re-run (Table 11). Per-corruption CIFAR-10-C and helpful natural shifts are insurance regimes, not policy wins.

**Real-shift scope.** The uniform panel deliberately distinguishes three outcomes. Camelyon17 genuine OOD and RxRx1 are reconciled/locked no-harm results: KGA ties the better fixed policy at zero observed false-adapt. Office-Home and iWildCam are reconciled from their out-of-fold bootstrap lock (App. 21): no-harm safety results now backed by saved OOF confidence intervals rather than a pending replay. PACS, ImageNet-R, and CIFAR-10.1 are completed breadth tracks, not natural beats-both claims. The three-source mixture is a constructed routing aggregate; it is not a transfer result and does not change the per-dataset conclusion.

**Theory and calibration.** The conformal radius assumes exchangeable calibration pairs; sign bracketing without structure is impossible (Theorems [lem:nonid] and [thm:headline]; Appendix 15). KGA’s value scales with how often catastrophic, detectable harm occurs, not

with universal accuracy gains. On helpful-dominated shifts the resulting near-*tie* with always-adapt reflects the certificate abstaining rather than committing harmful updates: KGA approximately matches the better policy, at most paying a small abstention cost when it declines a helpful but uncertifiable update, so the value proposition is conditional, like insurance against detectable harm. *Setting  $\beta$* . The budget is *declared*, not estimated—a deployment-time upper bound on admissible calibration drift, fixed from domain knowledge, historical dev-to-deployment gaps, or an explicit stress envelope. The choice  $\beta=0$  is the strongest zero-drift assumption and may be reported only as a plug-in baseline; it is not an assumption-free or conservative default. When no credible bound is justifiable, the population frontier cannot certify robustness to calibration drift, and the safe operational response is to abstain or freeze. Larger  $\beta$  widens the abstain band monotonically, trading decision coverage for robustness.

**Detectability and transfer.** ImageNet-R is a weak, split-specific evidence regime: one point-only arm does not survive both comparisons across three seeds. CIFAR-10.1 fails the cross-seed certificate bar ( $F A_u=0.167$  and descriptive  $F A_c=0.444$ ). These are useful boundary cases, not failed headline experiments: they show that a low-margin signal should not be promoted merely because one split or one candidate looks favorable.

**Theory limits versus empirical limits.** Some abstention is compatible with the population frontier, whereas baseline faithfulness, seed count, estimator quality, and replay status are ordinary empirical limitations requiring further validation. Tying always-adapt on a helpful-dominated shift is the no-harm guarantee *holding*: one cannot beat an oracle that is already always-adapt. Declining ImageNet-R is consistent with a weak-evidence, low-margin regime; the null result does not by itself establish structural non-identifiability under Theorem [thm:headline] (it could also reflect weak evidence, poor benefit estimation, or calibration-transfer failure). Abstention in the structurally ambiguous closed band prevents a uniformly sound strict commitment over the declared class. Empirical abstention, however, may instead stem from an overly wide radius or a weak estimator and therefore does not establish that a tested shift lies in that structural band. Richer label-free evidence may improve benefit estimation and reduce avoidable abstention, while better-justified or more data-efficient calibration can narrow finite-sample uncertainty; neither removes the population limitation without strengthening the declared assumptions or evidence.

**Baseline scope and recomputation.** On the ImageNet-C SAR configuration, the committal confidence gate adapts on harmful cells while KGA abstains on the low-margin band. The POEM/AETTA comparison is complete only for protocol-matched ports; official implementations remain future baseline work. The Office-Home/iWildCam summaries have a separate saved recomputation lock, but no external-lab replication; more seeds would strengthen ImageNet-C and PACS. Abstention lowers *decision* coverage but never withholds a prediction: it retains the frozen fallback  $f_0$ .

# Reproducibility

## Artifacts and Result Lineage

All locked/reconciled rows in Tables [\[tab:uniform-panel\]–13](#) link to saved raw cells or seed aggregates in the anonymized repository. Provisional rows are retained only to document completed evidence and the required replay; they are not reused as headline claims. The core certificate module is packaged as an installable module in the anonymized repository.

## Formal Verification Scope

The repository contains a kernel-checked Lean 4 formalization of indexed algebraic, finite-decision, measure-containment, and conditional uniform-rank results, with no sorry, admit, or project-defined axioms. It checks frontier sufficiency and the marginal false-adapt/false-freeze implication once coverage is assumed. The current development does not formalize the target-law witness construction, frontier necessity or maximality, risk alignment, multiclass identifiability, calibration transfer, or a general exchangeable-process lift. The implementation theorem uses the same exact rank rule as the current clean-split scorer; historical benchmark artifacts produced with an interpolated empirical quantile are not presented as kernel-certified split-conformal experiments. To our knowledge, machine-checked conformal-coverage results remain uncommon, but no priority claim is made.

## Claim-to-Support Map

@p0.20p0.075p0.22p0.22p0.20@ Claim & Type & Exact requirement & Evidence location & Caveat

Interior matched-evidence impossibility & theorem &  $\beta > 0, |M| < \beta$ , declared class contains the constructed worlds & Thm. [\[lem:nonid\]](#); App. 15 & Opposite nonzero benefits are an interior result only.

Closed-band abstention & theorem & Strict three-way soundness over  $|\gamma| \leq \beta$  &

Prop. [\[prop:closed-band\]](#) & Boundary is zero-versus-strict ambiguity, not opposite signs.

Strict-commitment frontier & theorem & Declared drift class and risk alignment &

Thm. [\[thm:headline\]](#) & Uniform strict commitment, not universal sign recovery.

Marginal  $F A_u$  certificate & theorem &  $P(|\hat{\Delta} - \Delta| \leq \varepsilon) \geq 1 - \alpha$  & Thm. [\[thm:certificate\]](#); Lean inventory & Does not control conditional  $F A_c$ .

CIFAR-10-C mixed-regime beats-both & empirical & Locked Tent/EATA stress aggregate and paired CIs & Table 8; canonical manifest & Current raw tree does not replay archived SAR; SAR withheld.

ImageNet-C authoritative result & empirical & 27 cells, SAR candidate, paired condition bootstrap & Table 11; bootstrap JSON & One seed; no cross-seed claim.

Natural no-harm results & empirical & Reconciled OOF or locked held-out artifacts & Tables [\[tab:uniform-panel\]–13](#) & Not single-dataset natural beats-both.

POEM/AETTA comparison & empirical & Same logged stress cells and protocol-matched ports & Table 10 & Not official implementations.

Constructed heterogeneous mixture & empirical & Researcher-constructed three-source routing aggregate & Sec. 7.9 & Not unseen-shift transfer.

Universal improvement & diagnostic & No supporting requirement is declared & Sec. 10 & Explicitly not claimed.

Single-dataset natural beats-both & diagnostic & Would require held-out CI superiority to both fixed policies & Natural-shift tables & Explicitly not claimed.

Real-camera study & pending & Fresh preregistered held-out sessions and raw logs & pre-registration templates & Templates are not evidence.

## Conclusion

K-Bound reframes test-time adaptation as a validity decision rather than an unconditional update. The central object is the target benefit  $\Delta = R_T(f_0) - R_T(f_a)$ . Over a declared drift-budget class, a strict adapt or freeze commitment is uniformly supportable if and only if the observable disagreement-region margin satisfies  $|M| > \beta$ ; on  $|M| \leq \beta$ , abstention is the maximal sound three-way action under the paper’s strict-decision semantics.

KGA operationalizes this principle with a label-free benefit estimate and a pre-calibrated uncertainty radius. The resulting controller commits the candidate only when the interval excludes zero, retains the frozen model when harm is certified, and otherwise abstains from changing state. Across the benchmark panel, the observed behavior follows the regime map: controlled mixed regimes provide beats-both routing results, one-sided natural shifts primarily provide no-harm behavior, and weak or non-transferable evidence remains diagnostic rather than being promoted as a win.

The broader implication is that an adaptation system should expose two components: an update mechanism and a validity layer that decides whether the update is supportable under the available evidence and assumptions. Strengthening K-Bound therefore requires not only better adapters, but also richer risk-aligned evidence, more defensible calibration across shifts, explicit drift-budget auditing, and reproducible deployment semantics.

## Calibration and held-out evaluation

Algorithm [alg:calib-eval] gives the evaluation protocol behind the uniform nine-track panel (Table [tab:uniform-panel]) and the primary numeric evidence (Table 13). Its two branches are *not* interchangeable: stress grids are scored cell-by-cell with leave-one-cell-out cross-fitting (no single deployment estimator exists), whereas natural-shift tracks fit one estimator and radius on the development split and score the untouched held-out domains exactly once.

**Require:** Conditions  $C$ ; frozen  $f_0$ ; adapters  $A_1, \dots, A_K$ ;

track type (stress grid or natural shift); level  $\alpha$

**Ensure:** Regret-to-oracle, false-adapt rate, coverage, beats-both verdict

**for all**  $c \in C$ , adapters  $A_k$  **do** *# shared evidence logging*

$f_a^{(k,c)} \leftarrow A_k(f_0, X_c)$ ;

$Z_{k,c} \leftarrow \phi(X_c, f_0, f_a^{(k,c)})$ ;

```

 $\Delta_{k,c} \leftarrow R_c(f_0) - R_c(f_a^{(k,c)})$ 
end for
if stress grid (CIFAR-10-C, ImageNet-C, PACS):  $C$  is one grid of cells then
for all cells  $i \in C$  do
  Fit  $\hat{\Delta}_{-i}$  on the other  $N - 1$  cells;
   $\rho_i \leftarrow |\hat{\Delta}_{-i}(Z_i) - \Delta_i|$  # leave-one-cell-out
end for
 $\varepsilon \leftarrow (1 - \alpha)$  empirical quantile of  $\{\rho_i\}_{i=1}^N$ 
for all cells  $i \in C$  do
  Run Algorithm [alg:kga] with  $(f_0, A_k, X_i, \hat{\Delta}_{-i}, \varepsilon)$ 
  # each cell scored by the estimator that never saw it (cross-fitted)
end for
else natural shift (Camelyon17, iWildCam, Office-Home, RxRx1): split
 $C = C_{cal} \dot{\cup} C_{test}$  across domains
  Form out-of-fold residuals on  $C_{cal}$ ;
   $\varepsilon \leftarrow (1 - \alpha)$  empirical quantile
  Fit deployment estimator  $\hat{\Delta}(Z)$  on all of  $C_{cal}$ ;
  freeze  $(\hat{\Delta}, \varepsilon)$ 
for all  $c \in C_{test}$  do
  Run Algorithm [alg:kga] with  $(f_0, A_k, X_c, \hat{\Delta}, \varepsilon)$ 
  # untouched held-out domains, scored once
end for
end if
  Record decision, regret-to-oracle, coverage, false-adapt indicator per condition
  Aggregate metrics vs. always-adapt, always-freeze, per-condition oracle

```

## Evidence feature schema and adapter hyperparameters

Two label-free evidence panels are used, matched to the two calibration regimes of §5.

Notation:  $p_0, p_a$  are the frozen and adapted softmax rows on the adaptation batch;

$\dot{m}_0 = \text{mean}_n p_{0,n}$  and  $\dot{m}_a$  are the predicted-class marginals;  $H(p) = -\sum_c p_c \log p_c$ ;  $C$  is the

number of classes. The stress-grid tracks (CIFAR-10-C, ImageNet-C, PACS) use the 11-dimensional base panel of Table 18 (kbound\_pkg/kbound/evidence.py). The natural-shift

tracks (Camelyon17, iWildCam, Office-Home, RxRx1) use the 16-dimensional panel of

Table 19: a 10-statistic frozen-logit summary plus a 6-feature rich panel

(scripts/run\_wilds\_camelyon17.py). All features are target-label-free; the ATC feature calibrates its threshold on *source* labels only.

*Base 11-dim evidence panel (stress grids).*

| Featur | Definit           | Family |
|--------|-------------------|--------|
| e      | ion               |        |
| pre_e  | $\text{mean}_n F$ | frozen |

|               |                          |                  |
|---------------|--------------------------|------------------|
| ntropy        |                          | output           |
| pre_conf      | $mean_n$                 | frozen output    |
| pre_pbal      | $H(\dot{m}_0)/$          | frozen marginal  |
| post_entropy  | $mean_n F$               | adapted output   |
| post_conf     | $mean_n$                 | adapted output   |
| post_pbal     | $H(\dot{m}_a)/$          | adapted marginal |
| pbal_drop     | pre_pbal-post_pbal       | change           |
| entropy_drop  | pre_entropy-post_entropy | change           |
| frac_highconf | $frac_n(r$               | collapse         |
| marginal_KL   | $\sum_c \dot{m}_{a,c}$   | drift            |
| update_norm   | $\ \Delta\theta_{aff}$   | update           |

*Rich 16-dim panel (natural shift): 10 frozen-logit statistics + 6 rich features.  $H$  is softmax entropy,  $s = \max_c softmax$  the confidence,  $E(x) = -\log \sum_c e^{z_c}$  the free energy; subscripts  $s, t$  denote source/target pools.*

| Feature | Definition | Family |
|---------|------------|--------|
|---------|------------|--------|

entropy       $mean_n$  / frozen

|       |            |       |
|-------|------------|-------|
| mean  | $n$        |       |
| /std  |            |       |
| ent   | 25/75      | froze |
| p25/  | pct. o     | n     |
| p75   | f $H$      |       |
| conf  | $mean$     | froze |
| mean  | $n$        |       |
| /std  |            |       |
| frac  | $frac($    | froze |
| hi-   | $n$        |       |
| conf  |            |       |
| frac  | $frac($    | froze |
| hi-   | $n$        |       |
| ent   |            |       |
| marg. | $\max_c m$ | froze |
| max   | $n$        |       |
|       | marg       |       |
|       | inal       |       |
| marg. | $std_c m$  | froze |
| std   | $n$        |       |
|       | marg       |       |
|       | inal       |       |
| disa  | $frac($    | disag |
| gree  |            | reem  |
|       | ent        |       |
| ent_  | $mean$     | chan  |
| gap   |            | ge    |
| en_s  | $mean$     | drift |
| hift  |            |       |
| bn_k  | $mean_c$   | drift |
| l     |            |       |
| atc   | $frac_t($  | accur |
|       | , $t$      | acy   |
|       | src-       | prox  |
|       | calib.     | y     |
| conf_ | $means$    | drift |
| drop  |            |       |

*Per-track adapter hyperparameters (from the run configs). Adapted parameters are BN/LayerNorm-affine only; TTA optimizer is Adam. “Aggressiveness” cells use mild = (10 steps, lr  $10^{-3}$ ) or aggressive = (50 steps, lr  $2.5 \times 10^{-3}$ ). EATA uses an entropy filter  $e_{thr} = 0.4 \ln 2 \approx 0.28$ ; SAR adds SAM + entropy reset. Backbones for CIFAR-10-C, ImageNet-C, PACS, and Camelyon17 are verified from the run code; the remaining WILDS/DomainBed tracks use the standard baseline.*

Track

---

CIFAR-10-C stress

ImageNet-C

PACS (LODO)

Camelyon17

iWildCam

Office-Home

RxRx1

## Complete core proofs

This appendix is not required for the main empirical claim; it preserves the full theorem stack and validator mapping behind the three main-paper theorems: matched-evidence impossibility (Theorem [lem:nonid]), the benefit-sign frontier (Theorem [thm:headline]), and the finite-sample certificate (Theorem [thm:certificate]). The main text contains the complete algebraic proofs; the material below records only the supporting matched-evidence form and zero-drift interpretation used by those proofs.

### Core-theory inventory.

The main text gives complete proofs of disagreement reduction, interior impossibility, boundary abstention, the strict-commitment frontier, and the coverage-based certificate. This appendix records the matched-evidence full form and the zero-drift interpretation. Minimax, one-bit, capacity, and rate extensions are kept in the long manuscript and are not part of the short-paper claim stack.

[lem:gate] For any estimator  $\hat{\Delta}$  and gate  $\hat{g} = 1[\hat{\Delta} > 0]$ ,

$$R(\hat{g}) - R(g^*) = E[|\Delta(Z)| 1\{\text{sign } \hat{\Delta} \neq \text{sign } \Delta\}], g^* = 1[\Delta > 0].$$

On  $\{|\Delta| < \varepsilon\}$ , committal regret is at most  $\varepsilon$ .

Wrong-sign commits pay  $|\Delta|$  pointwise; averaging gives the identity.

[prop:lecam-finite] Let two target worlds share evidence laws at TV distance  $\delta$  and have opposite benefit signs with magnitude  $\Lambda > 0$ . For every label-free committal gate and finite  $n$ ,



$$\inf_{\hat{g}} \max_{\theta=\pm 1} [R_{P_\theta}(\hat{g}) - R_{P_\theta}(g^*)] \geq \Lambda/2(1-\delta) \geq \Lambda/4 e^{-KL}.$$

A Gaussian family with  $d_n = c/\sqrt{n}$  realizes a constant floor in  $n$  (val\_thm2\_lecam\_finite\_n.py).

[thm:imp] Theorem [lem:nonid] is part (iii) of the following. Fix  $\alpha \in (0, 1/2)$ .

1. Witness worlds with  $Law(Z \mid P_T^1) = Law(Z \mid P_T^2)$  and  $\text{sign } \Delta_1 = -\text{sign } \Delta_2 \neq 0$ .
2. Le Cam identity:  $\inf_g M(g) = 1 - TV$  between the evidence laws.
3. Forced abstention at rate  $\geq 1 - 2\alpha$  under dual error control.

[cor:forced-abstain] In the  $|M| \leq \beta$  wedge of Theorem [thm:headline], Theorem [thm:imp] (iii) implies any label-free rule with false-adapt and false-freeze  $\leq \alpha$  must abstain with probability at least  $1 - 2\alpha$  on matched evidence. Opposite nonzero signs are required only for  $|M| < \beta$ ; at  $|M| = \beta > 0$  zero-versus-strict ambiguity suffices, and at  $M = \beta = 0$  the benefit is identically zero so neither strict action is sound.

[prop:cert-sample] With empirical-Bernstein paired benefits, one-sided certification requires  $n = \tilde{O}(\sigma^2/\Delta^2)$ ; two-sided sign certification requires the same exponent with a larger constant (val\_minimax\_optimality.py).

[rem:beta-zero] On the  $\beta = 0$  face the class  $C_0$  forces  $\gamma = 0$ , so Lemma [lem:reduction] gives  $\text{sign } \Delta = \text{sign } M$  exactly, and the frontier of Theorem [thm:headline] specializes as follows. If  $M \neq 0$ , the strict action of  $\text{sign } M$  (adapt for  $M > 0$ , freeze for  $M < 0$ ) is uniformly sound over  $C_0$ . If  $M = 0$ , then  $\Delta = 0$  identically, so under the strict-decision semantics neither strict action is sound and the maximal sound action is abstain. Existing label-free estimators may be interpreted as  $\beta = 0$  plug-ins only when their estimand realizes the stated disagreement-score decomposition; assuming  $\gamma = 0$  alone does not establish their soundness.

[thm:conj1-dichotomy] Under the CEI panel hypothesis **H**: (i) rank-one agreement law; (ii) evidence fixes magnitudes but not global orientation  $b \mapsto -b$ ; (iii) no evidence-definable assumption identifies  $\text{sign } \Delta$ ; the minimal untestable supplement is one bit; (iv) drift budgets are auditable but not verifiable on a blind set. Conjecture [conj:gen] is resolved negatively by (iii).

[conj:gen] Unconditional label-free bracketing does not exist; the weakest one-bit classes (an explicit finite family of dominance polytopes) are characterized in the long manuscript (kbound.tex).

[thm:ev-rate] Under audited H, unlabeled agreement statistics and labeled paired benefits both converge at rate  $m^{-1/2}$ ; labels change constants and supply the missing bit, not the exponent.

Validator map. val\_thm2\_lecam\_finite\_n.py (Prop. [prop:lecam-finite]); val\_conj1\_.py (Thm. [thm:conj1-dichotomy]); val\_ev\_rate.py (Thm. [thm:ev-rate]).

## Multiclass and regression derivations

For multiclass 0/1 loss, errors cancel outside  $D = \{f_0 \neq f_a\}$ , giving  $\Delta = \mu_T(D)(p_a - p_0)$  with  $p_j = P_T(f_j = Y \mid D)$ . In contrast to binary classification,  $p_0$  need not equal  $1 - p_a$ . If  $p_a - p_0 = M_{mc} + \gamma_{mc}$  and  $|\gamma_{mc}| \leq \beta_{mc}$ , then  $|M_{mc}| > \beta_{mc}$  is sufficient for a strict commitment; necessity additionally needs the declared class to realize the admissible evidence-identical drifts.

For squared-loss regression, let  $m_T(x) = E_T[Y \mid X = x]$ . Direct expansion gives

$$\Delta = E_T[(f_a - f_0)(2m_T - f_0 - f_a)].$$

The integrand vanishes where  $f_a = f_0$ , so the comparison is again disagreement-local. For an observable proxy  $u(x)$ , define

$$\begin{aligned} M_{reg} &= E_T[(f_a - f_0)(2u - f_0 - f_a)], \\ \gamma_{reg} &= 2E_T[(f_a - f_0)(m_T - u)]. \end{aligned}$$

Then  $\Delta = M_{reg} + \gamma_{reg}$ . A declared bound  $|\gamma_{reg}| \leq \beta_{reg}$  yields the same sufficient strict-commitment rule  $|M_{reg}| > \beta_{reg}$ ; a converse again requires a richness assumption on the target class.

## Historical protocol reconciliation

The main text contains the complete empirical accounting in the uniform nine-track panel. Historical route studies and superseded per-dataset tables are deliberately excluded from this short-paper build. Their raw logs remain in the repository for audit, but they are not independent empirical claims. The declared evaluation unit is a condition or evaluation cell (cross-fitted on the stress grids, held-out on the natural-shift tracks), never an arbitrary pool of frames or domains; all policies replay the same unit stream, and labels are revealed only after the KGA decision for offline scoring.

## Physical-study pre-registration

The two-phone package-inspection protocol is locked before fresh capture. Table [\[tab:camera-r1\]](#) records the split and deployment design; Table [\[tab:camera-r2\]](#) fixes the primary endpoint layout. Every result cell remains blank until the exact physical inventory, source-model gate, development seal, held-out chronology, replication replay, and anti-leakage audit pass the machine-readable publication gate. Browser previews, mock clips, and reconstructed media are software diagnostics, not evidence.

| Item   | Locked design                       |
|--------|-------------------------------------|
| Task   | Four-class package/label inspection |
| Camera | Two phone cameras and real physics  |

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Base model                      | MobileNetV3-Small                    |
| Candidate adaptation            | Episodic Tent; one update step per   |
| Decision window                 | 32 frames                            |
| Evidence                        | 14 label-free frozen/candidate dis   |
| Calibration-fit sessions        | (distinct recorded session; IDs lock |
| Conformal calibration sessions  | (different day/session from calibra  |
| Held-out physical test sessions | (different day/session; inaccessible |
| Physical shifts                 | Lighting, shadow, blur, background   |
| Policies compared               | Always-freeze, always-adapt, confi   |
| Deployment labels used live?    | No; labels are joined only during o  |
| Miscoverage level               | $\alpha = 0.10$                      |
| Official live model             | Frozen fallback unless the candida   |
| Policy                          | Balance                              |
| Always-freeze                   |                                      |
| Always-adapt                    |                                      |
| Confidence gate                 |                                      |
| Entropy gate                    |                                      |
| KGA, no radius                  |                                      |
| KGA certificate                 |                                      |

$F A_u = P(\text{adapt} \wedge \Delta \leq 0)$  is the certificate-aligned unconditional false-adapt rate;  
 $F A_c = P(\Delta \leq 0 \mid \text{adapt})$  is descriptive. Ground-truth labels are unavailable during live decisions and are revealed only for offline evaluation. Latency reporting includes candidate adaptation, the KGA decision, and full end-to-end window latency.

## Runtime details

The adapter update requires forward and backward computation before the controller can decide. The saved controller microbenchmark reports evidence extraction, benefit-model evaluation, rollback copy memory, and benefit-model size; these are the added-cost quantities reported in Table 6. A complete end-to-end profile separating frozen inference, candidate adaptation, candidate inference, rollback time, and total window latency remains pending and is not inferred from the controller-only microbenchmark.

## Formalization inventory

Lean checks the indexed algebraic, finite-decision, measure-containment, and conditional uniform-rank results listed in `formal/KBound/TheoremMap.lean`. It does not formalize the target-law witness construction, frontier necessity/maximality, risk alignment, calibration transfer, or the lift from a conditional uniform-index model to general exchangeable processes.

## Claim-to-artifact map

The machine-readable manifest paper/generated/kbound\_result\_manifest.json is the authoritative index for every promoted number, seed count, protocol, quantile convention, and known replay caveat. Table [\[tab:claim-status\]](#) gives the reader-facing summary; the external manifest retains exact repository paths and pending work.

99

D. Wang, E. Shelhamer, S. Liu, B. Olshausen, T. Darrell. Tent: Fully test-time adaptation by entropy minimization. *ICLR*, 2021.

J. Liang, D. Hu, J. Feng. Do we really need to access the source data? Source hypothesis transfer for unsupervised domain adaptation. *ICML*, 2020.

Y. Sun, X. Wang, Z. Liu, J. Miller, A. Efros, M. Hardt. Test-time training with self-supervision for generalization under distribution shifts. *ICML*, 2020.

S. Niu, J. Wu, Y. Zhang, Y. Chen, S. Zheng, P. Zhao, M. Tan. Efficient test-time model adaptation without forgetting. *ICML*, 2022.

S. Niu, J. Wu, Y. Zhang, Z. Wen, Y. Chen, P. Zhao, M. Tan. Towards stable test-time adaptation in dynamic wild world. *ICLR*, 2023.

Q. Wang, O. Fink, L. Van Gool, D. Dai. Continual test-time domain adaptation. *CVPR*, 2022.

M. Zhang, S. Levine, C. Finn. MEMO: Test time robustness via adaptation and augmentation. *NeurIPS*, 2022.

M. Schirmer, M. Jazbec, C. A. Naesseth, E. Nalisnick. Monitoring risks in test-time adaptation. *NeurIPS*, 2025. arXiv:2507.08721.

A. Podkopaev, A. Ramdas. Tracking the risk of a deployed model and detecting harmful distribution shifts. *ICLR*, 2022. arXiv:2110.06177.

Y. Bar, S. Shaer, Y. Romano. Protected test-time adaptation via online entropy matching: A betting approach. *NeurIPS*, 2024. arXiv:2408.07511.

S. Garg, S. Balakrishnan, Z. Lipton, B. Neyshabur, H. Sedghi. Leveraging unlabeled data to predict out-of-distribution performance. *ICLR*, 2022. arXiv:2201.04234.

- A. T. Kalai, V. Kanade. Towards optimally abstaining from prediction with OOD test examples. *NeurIPS*, 2021. arXiv:2105.14119.
- J. Miller, R. Taori, A. Raghunathan, S. Sagawa, P. W. Koh, V. Shankar, P. Liang, Y. Carmon, L. Schmidt. Accuracy on the line: On the strong correlation between out-of-distribution and in-distribution generalization. *ICML*, 2021. arXiv:2107.04649.
- C. Baek, Y. Jiang, A. Raghunathan, J. Z. Kolter. Agreement-on- the-line: Predicting the performance of neural networks under distribution shift. *NeurIPS*, 2022. arXiv:2206.13089.
- T. Lee, S. Chottananurak, T. Gong, S.-J. Lee. AETTA: Label-free accuracy estimation for test-time adaptation. *CVPR*, 2024. arXiv:2404.01351.
- J. Steinhardt, P. Liang. Unsupervised risk estimation using only conditional independence structure. *NeurIPS*, 2016. arXiv:1606.05313.
- S. Ben-David, J. Blitzer, K. Crammer, A. Kulesza, F. Pereira, J. Wortman Vaughan. A theory of learning from different domains. *Machine Learning* 79(1-2):151–175, 2010.
- E. Rosenfeld, S. Garg. (Almost) provable error bounds under distribution shift via disagreement discrepancy. *NeurIPS*, 2023. arXiv:2306.00312.
- Y. Geifman, R. El-Yaniv. Selective classification for deep neural networks. *NeurIPS*, 2017.
- J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, L. Fei-Fei. ImageNet: A large-scale hierarchical image database. *CVPR*, 2009.
- D. Hendrycks, T. Dietterich. Benchmarking neural network robustness to common corruptions and perturbations. *ICLR*, 2019.
- P. W. Koh, S. Sagawa, H. Marklund, S. M. Xie, M. Zhang, A. Balsubramani, W. Hu, M. Yasunaga, et al. WILDS: A benchmark of in-the-wild distribution shifts. *ICML*, 2021.
- P. Bándi, O. Geessink, Q. Manson, M. van Dijk, M. Balkenhol, M. Hermesen, et al. From detection of individual metastases to classification of lymph node status at the patient level: The CAMELYON17 challenge. *IEEE Trans. Med. Imaging* 38(2):550–560, 2019.
- J. Taylor, S. L. Earnshaw, B. M. Mabey, M. Victors, M. N. Annis, D. Y. Torigian, et al. The RXX1 dataset and challenge: Unsupervised classification of cellular morphological changes. *arXiv:1907.04758*, 2019.
- H. Venkateswara, J. Eusebio, S. Chakraborty, S. Panchanathan. Deep hashing network for unsupervised domain adaptation. *CVPR*, 2017. (Office-Home dataset release).
- I. Gulrajani, D. Lopez-Paz. In search of lost domain generalization. *ICLR*, 2021.
- F. Croce, M. Andriushchenko, V. Sehwag, E. Debenedetti, N. Flammarion, M. Chiang, P. Mittal, M. Hein. RobustBench: A standardized adversarial robustness benchmark. *NeurIPS Datasets and Benchmarks*, 2021.

B. Recht, R. Roelofs, L. Schmidt, V. Shankar. Do CIFAR-10 classifiers generalize to CIFAR-10? *ICML*, 2019.

A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga, et al. PyTorch: An imperative style, high-performance deep learning library. *NeurIPS*, 2019.

F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, et al. Scikit-learn: Machine learning in Python. *JMLR* 12:2825–2830, 2011.

R. Xie, A. Odonnat, V. Feofanov, W. Deng, J. Zhang, B. An. MaNo: exploiting matrix norm for unsupervised accuracy estimation under distribution shifts. *NeurIPS*, 2024. arXiv:2405.18979.

W. Deng, Y. Suh, S. Gould, L. Zheng. Confidence and dispersity speak: characterizing prediction matrix for unsupervised accuracy estimation. *ICML*, 2023. arXiv:2302.01094.

J. Liang, R. He, T. Tan. A comprehensive survey on test-time adaptation under distribution shifts. *IJCV* 133(1):31–64, 2025. arXiv:2303.15361.

R. J. Tibshirani, R. F. Barber, E. Candès, A. Ramdas. Conformal prediction under covariate shift. *NeurIPS*, 2019. arXiv:1904.06019.

R. F. Barber, E. J. Candès, A. Ramdas, R. J. Tibshirani. Conformal prediction beyond exchangeability. *Annals of Statistics* 51(2):816–845, 2023. arXiv:2202.13415.

I. Gibbs, E. Candès. Adaptive conformal inference under distribution shift. *NeurIPS*, 2021. arXiv:2106.00170.

S. Park, E. Dobriban, I. Lee, O. Bastani. PAC prediction sets under covariate shift. *ICLR*, 2022. arXiv:2106.09848.

S. Bates, A. Angelopoulos, L. Lei, J. Malik, M. I. Jordan. Distribution-free, risk-controlling prediction sets. *JACM* 68(6), 2021. arXiv:2101.02703.

A. N. Angelopoulos, S. Bates, E. J. Candès, M. I. Jordan, L. Lei. Learn then test: calibrating predictive algorithms to achieve risk control. *Annals of Applied Statistics*, 2025. arXiv:2110.01052.

T. Hoang, D. M. Vo, M. N. Do. Persistent test-time adaptation in recurring testing scenarios. *NeurIPS*, 2024. arXiv:2311.18193.

J. Lee, D. Jung, S. Lee, J. Park, J. Shin, U. Hwang, S. Yoon. Entropy is not enough for test-time adaptation: from the perspective of disentangled factors. *ICLR*, 2024. arXiv:2403.07366.