



Launching an instance

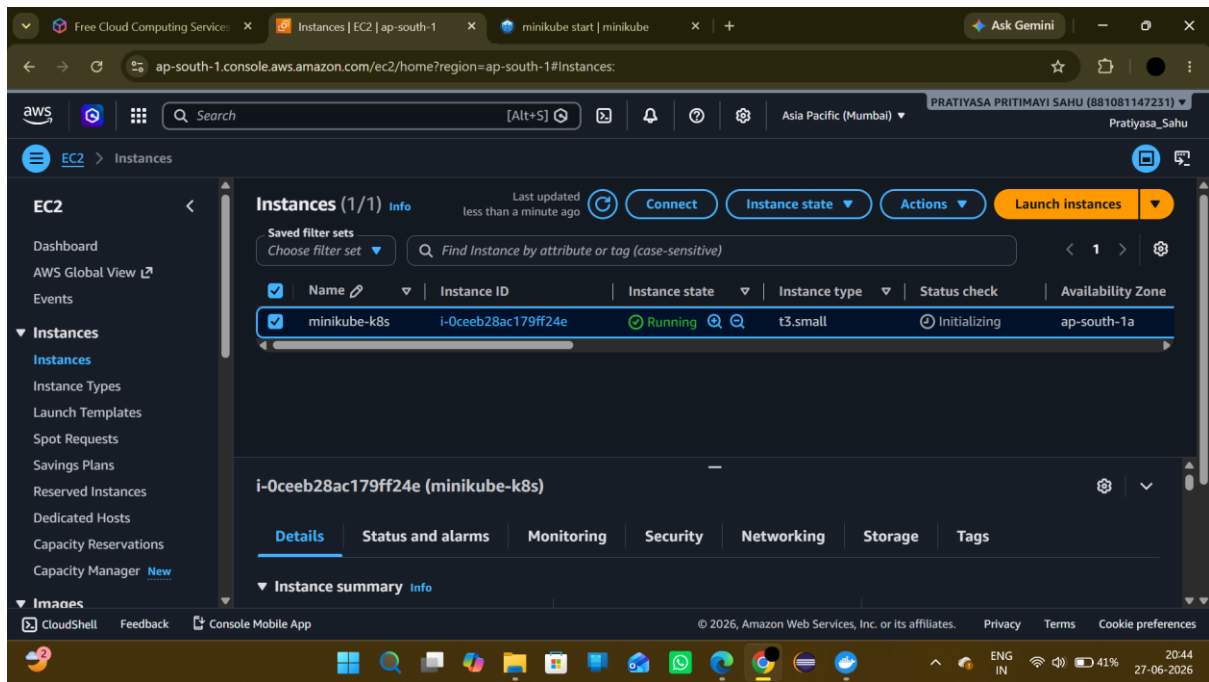

Updating the server

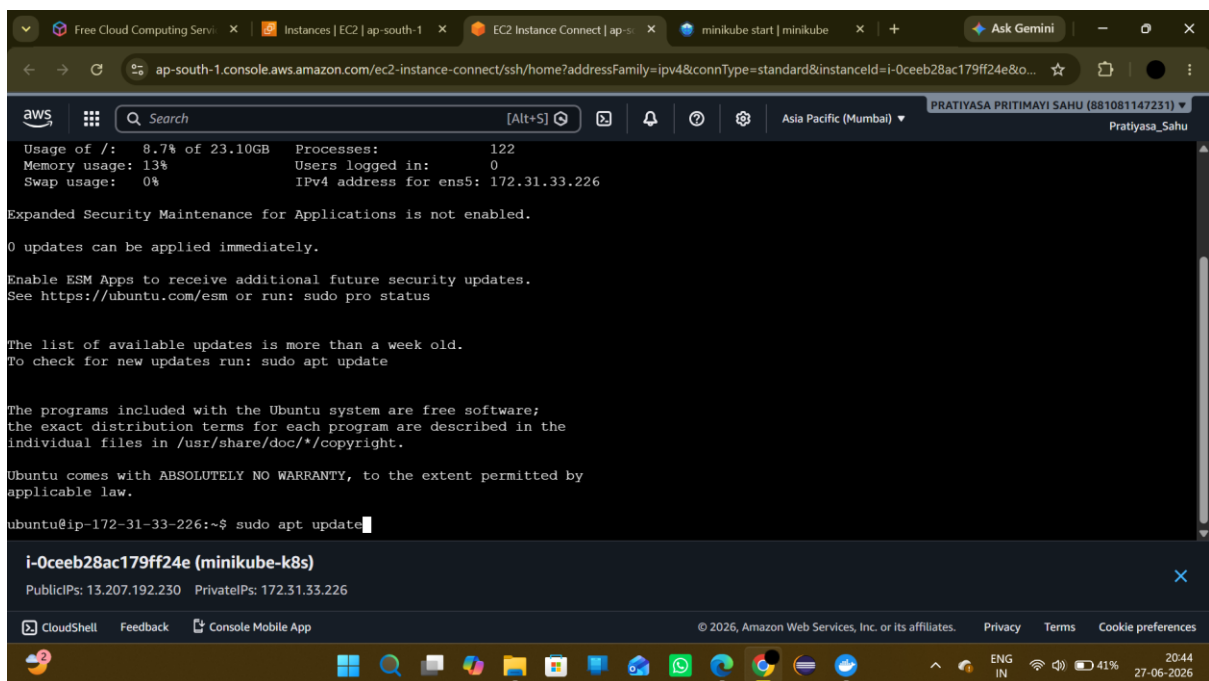

Installing docker and minikube

```
ubuntu@ip-172-31-33-226:~$ docker --v
unknown flag: --v

Usage:  docker [OPTIONS] COMMAND [ARG...]

Run 'docker --help' for more information
ubuntu@ip-172-31-33-226:~$ docker -v
Docker version 29.1.3, build 29.1.3-0ubuntu4.1
ubuntu@ip-172-31-33-226:~$ curl -LO https://storage.googleapis.com/minikube/releases/latest/minikube_latest_amd64.deb
sudo dpkg -i minikube_latest_amd64.deb
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left     Speed
100 36.84M 100 36.84M    0     0  8.38M      0  00:04  00:04    0     7.72M
Selecting previously unselected package minikube.
(Reading database ... 85680 files and directories currently installed.)
Preparing to unpack minikube_latest_amd64.deb ...
Unpacking minikube (1.38.1-0) ...
Setting up minikube (1.38.1-0) ...
ubuntu@ip-172-31-33-226:~$ minikube start
```

i-0ceeb28ac179ff24e (minikube-k8s)

PublicIPs: 13.207.192.230 PrivateIPs: 172.31.33.226

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

```
* minikube v1.38.1 on Ubuntu 26.04
* Using the docker driver based on user configuration

X Exiting due to PROVIDER DOCKER NEWGRP: "docker version --format <no value>:<no value>:<no value>" exit status 1: permission denied while trying to connect to the docker API at unix:///var/run/docker.sock
* Suggestion: Add your user to the 'docker' group: 'sudo usermod -aG docker $USER && newgrp docker'
* Documentation: https://docs.docker.com/engine/install/linux-postinstall/

ubuntu@ip-172-31-33-226:~$ sudo usermod -aG docker $USER
ubuntu@ip-172-31-33-226:~$ newgrp docker
ubuntu@ip-172-31-33-226:~$ minikube start --driver docker
* minikube v1.38.1 on Ubuntu 26.04
* Using the docker driver based on user configuration
! Starting v1.39.0, minikube will default to "containerd" container runtime. See #21973 for more info.

X The requested memory allocation of 1905MiB does not leave room for system overhead (total system memory: 1905MiB). You may face stability issues.
* Suggestion: Start minikube with less memory allocated: 'minikube start --memory=1905mb'

* Using Docker driver with root privileges
* Starting "minikube" primary control-plane node in "minikube" cluster
* Pulling base image v0.0.50 ...
* Downloading Kubernetes v1.35.1 preload ...
  > preloaded-images-k8s-v18-v1...: 48.09 MiB / 272.45 MiB 17.65% 4.38 MiB
```


i-0ceeb28ac179ff24e (minikube-k8s)

PublicIPs: 13.207.192.230 PrivateIPs: 172.31.33.226

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Created myapp namespace and inside it image nginx is created

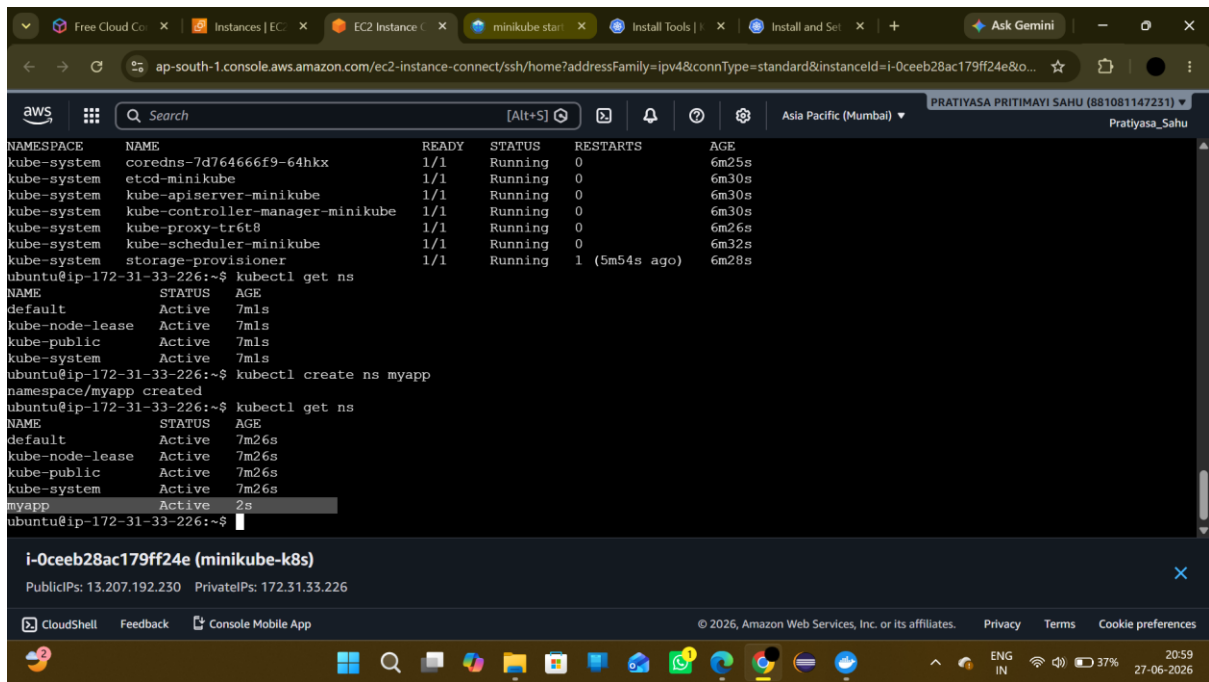

The screenshot shows a terminal window in the AWS CloudShell environment. The user is logged in as Pratiyasa_Sahu. The terminal output shows the following commands and results:

```
NAMESPACE NAME READY STATUS RESTARTS AGE
kube-system coredns-7d76466f9-64hxx 1/1 Running 0 6m25s
kube-system etcd-minikube 1/1 Running 0 6m30s
kube-system kube-apiserver-minikube 1/1 Running 0 6m30s
kube-system kube-controller-manager-minikube 1/1 Running 0 6m30s
kube-system kube-proxy-tr6t8 1/1 Running 0 6m32s
kube-system kube-scheduler-minikube 1/1 Running 0 6m32s
kube-system storage-provisioner 1/1 Running 1 (5m54s ago) 6m28s

ubuntu@ip-172-31-33-226:~$ kubectl get ns
NAME STATUS AGE
default Active 7m1s
kube-node-lease Active 7m1s
kube-public Active 7m1s
kube-system Active 7m1s


ubuntu@ip-172-31-33-226:~$ kubectl create ns myapp
namespace/myapp created

ubuntu@ip-172-31-33-226:~$ kubectl get ns
NAME STATUS AGE
default Active 7m26s
kube-node-lease Active 7m26s
kube-public Active 7m26s
kube-system Active 7m26s
myapp Active 2s

ubuntu@ip-172-31-33-226:~$
```

The terminal window also shows a sidebar with the instance ID **i-0ceeb28ac179ff24e (minikube-k8s)** and its public and private IP addresses.

Creating a sample deployment and expose it at port 8080

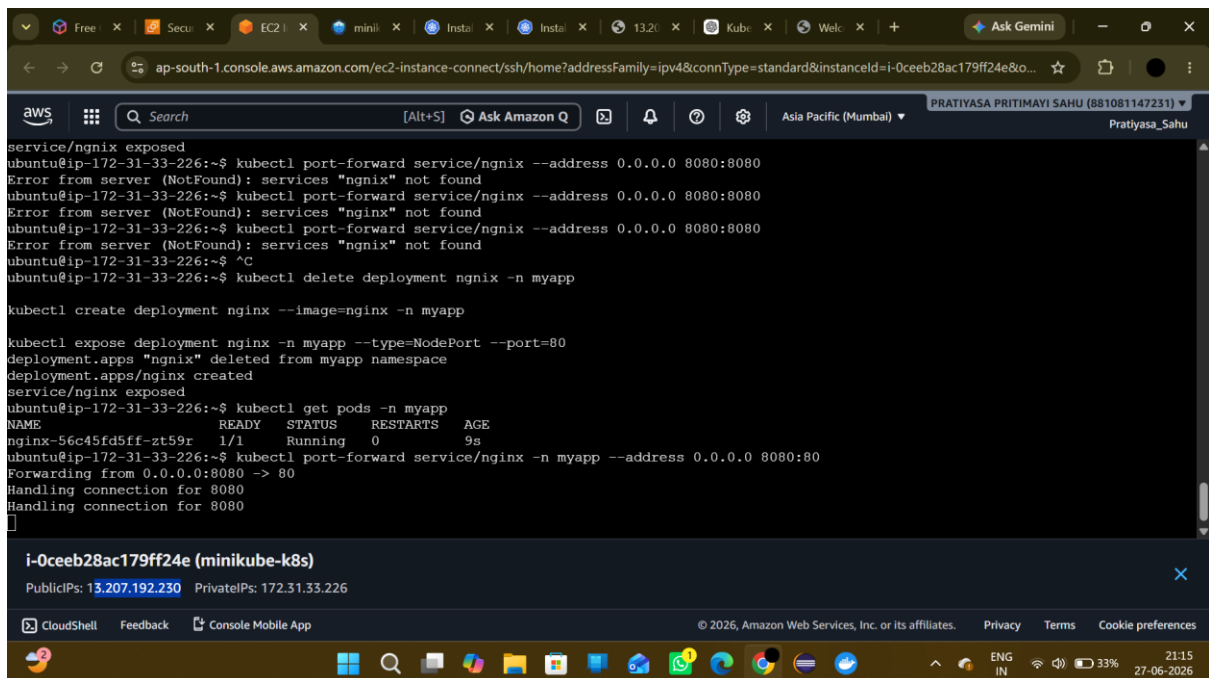

The screenshot shows a terminal window in the AWS CloudShell environment. The user is logged in as Pratiyasa_Sahu. The terminal output shows the following commands and results:

```
service/nginx exposed
ubuntu@ip-172-31-33-226:~$ kubectl port-forward service/nginx --address 0.0.0.0 8080:8080
Error from server (NotFound): services "nginx" not found
ubuntu@ip-172-31-33-226:~$ kubectl port-forward service/nginx --address 0.0.0.0 8080:8080
Error from server (NotFound): services "nginx" not found
ubuntu@ip-172-31-33-226:~$ kubectl port-forward service/nginx --address 0.0.0.0 8080:8080
Error from server (NotFound): services "nginx" not found
ubuntu@ip-172-31-33-226:~$ ^C
ubuntu@ip-172-31-33-226:~$ kubectl delete deployment nginx -n myapp

kubectl create deployment nginx --image=nginx -n myapp

kubectl expose deployment nginx -n myapp --type=NodePort --port=80
deployment.apps "nginx" deleted from myapp namespace
deployment.apps/nginx created
service/nginx exposed
ubuntu@ip-172-31-33-226:~$ kubectl get pods -n myapp
NAME READY STATUS RESTARTS AGE
nginx-56c45fd5ff-zt59r 1/1 Running 0 9s
ubuntu@ip-172-31-33-226:~$ kubectl port-forward service/nginx -n myapp --address 0.0.0.0 8080:80
Forwarding from 0.0.0.0:8080 -> 80
Handling connection for 8080
Handling connection for 8080
```

The terminal window also shows a sidebar with the instance ID **i-0ceeb28ac179ff24e (minikube-k8s)** and its public and private IP addresses.

Nginx reached at port 8080 of the launched server

