

Penetration Testing: Metasploitable 2

Steps taken:

Set Up Virtual Machines

- Install and configure VirtualBox to create virtual machines for **Kali Linux** and **Metasploitable 2**.


(Insert an image of the VirtualBox interface here)

Configure Network Settings

- Ensure both virtual machines are connected to the same **NAT Network**. This allows the VMs to communicate with each other via ping and other network interactions.

Find the IP Address

- Use the `ip a` command on each virtual machine to retrieve their respective IP addresses.

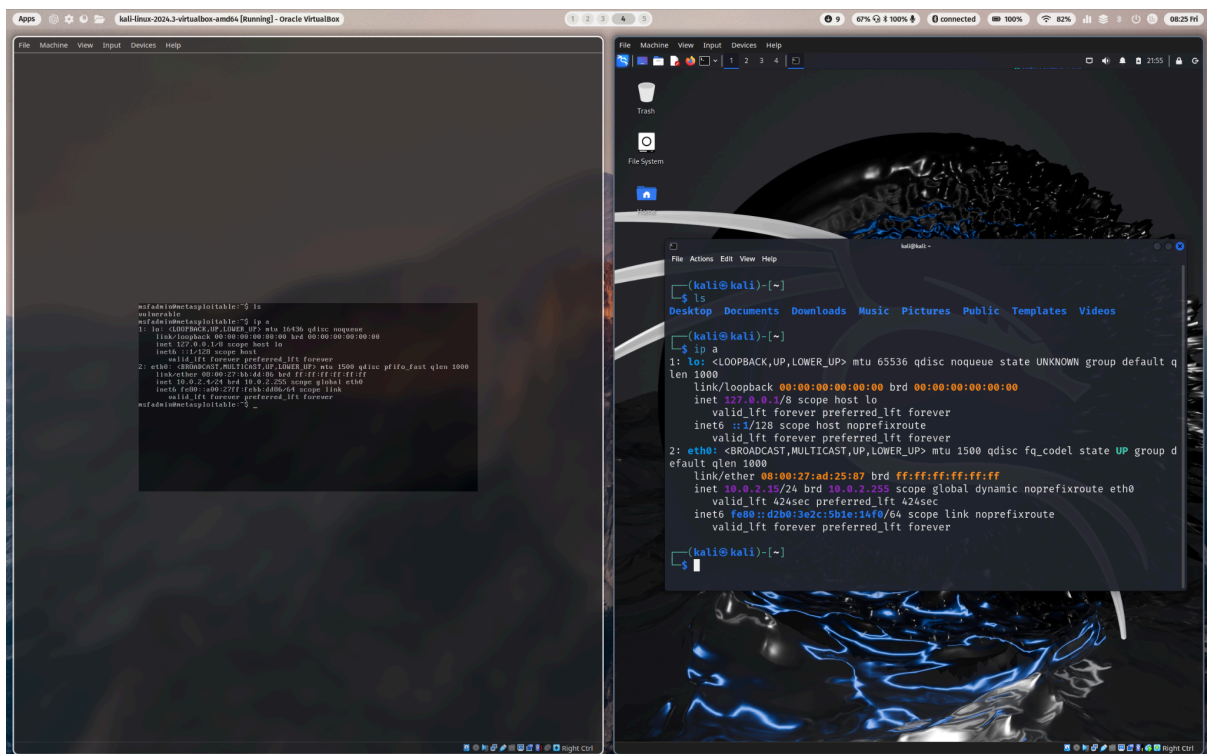

Scan the Metasploitable VM Using Nmap

- Use the `nmap` tool to ping the Metasploitable virtual machine. This will help identify the versions of services running on it and gather details about the operating system

