

```

#include <stdio.h>

int main() {

    int n, i;

    int at[20], bt[20], wt[20], tat[20], ct[20];

    printf("1WA24CS216\n");

    printf("Enter number of processes: ");

    scanf("%d", &n);

    printf("Enter Arrival Time and Burst Time:\n");

    for(i = 0; i < n; i++) {

        printf("P%d Arrival Time: ", i+1);

        scanf("%d", &at[i]);

        printf("P%d Burst Time: ", i+1);

        scanf("%d", &bt[i]);

    }

    ct[0] = at[0] + bt[0];

    for(i = 1; i < n; i++) {

        if(ct[i-1] < at[i])

            ct[i] = at[i] + bt[i];

        else

            ct[i] = ct[i-1] + bt[i];

    }

    for(i = 0; i < n; i++)

        tat[i] = ct[i] - at[i];

    for(i = 0; i < n; i++)

        wt[i] = tat[i] - bt[i];

    float avg_wt = 0, avg_tat = 0;

    for(i = 0; i < n; i++) {

        avg_wt += wt[i];


        avg_tat += tat[i];

    }

    printf("\nAverage Waiting Time = %.2f", avg_wt/n);

```

```
printf("\nAverage Turnaround Time = %.2f", avg_tat/n);  
  
return 0;  
  
}
```

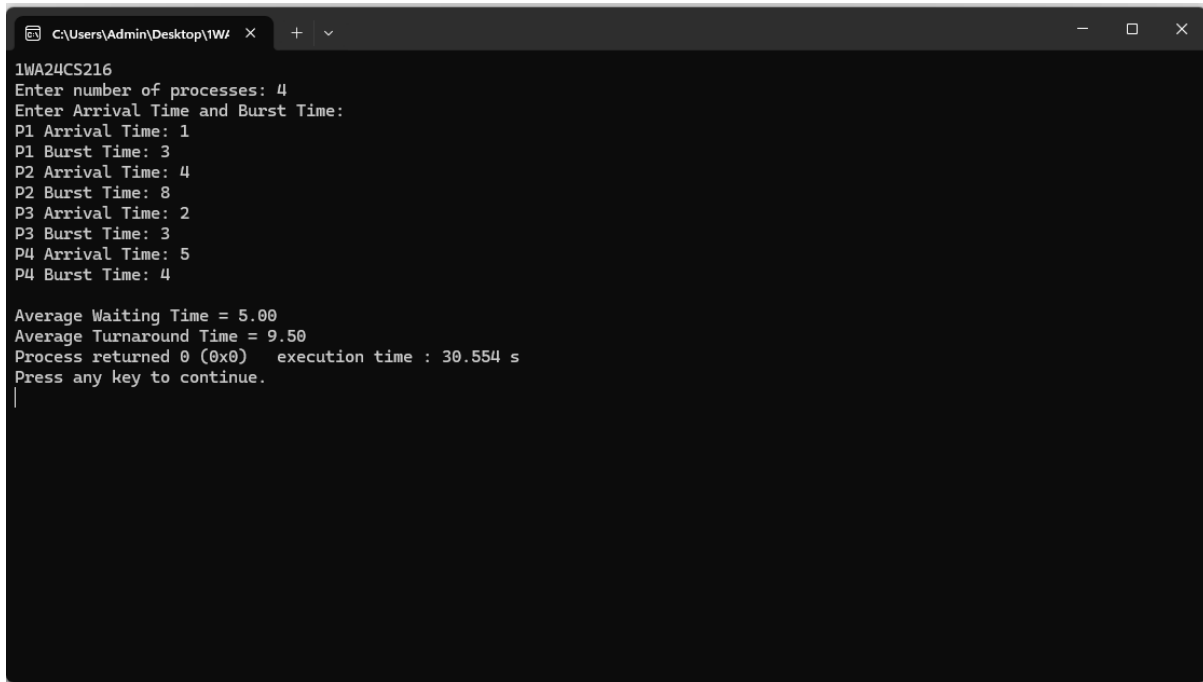

```
1WA24CS216  
Enter number of processes: 4  
Enter Arrival Time and Burst Time:  
P1 Arrival Time: 1  
P1 Burst Time: 3  
P2 Arrival Time: 4  
P2 Burst Time: 8  
P3 Arrival Time: 2  
P3 Burst Time: 3  
P4 Arrival Time: 5  
P4 Burst Time: 4  
  
Average Waiting Time = 5.00  
Average Turnaround Time = 9.50  
Process returned 0 (0x0)   execution time : 30.554 s  
Press any key to continue.  
|
```