

COURSE : AI ASSISTED CODING

Name:Pravalika Muthoju

Hall Ticket:2303A52347

Batch:34

Assignment:12.2

Lab 12: Algorithms with AI Assistance – Sorting, Searching, and optimising algorithms lab.

Objectives:

- Apply AI-assisted programming to implement and optimize sorting and searching algorithms.
- Compare different algorithms in terms of efficiency and use cases. Week6 - Tuesday
- Understand how AI tools can suggest optimized code and complexity improvements.

Task Description -1 (Data Structures – Stack Implementation with AI Assistance)

- Task: Use AI assistance to generate a Python program that implements a Stack data structure.

Instructions:

Prompt AI to create a Stack class with the following methods:

- push(element)
- pop()
- peek()
- is_empty()
- Ensure proper error handling for stack underflow.
- Ask AI to include clear docstrings for each method.

Expected Output:

- A functional Python program implementing a Stack using a class.
- Properly documented methods with docstrings.

Prompt:

"Act as a Python developer. Create a `Stack` class that follows the LIFO (Last-In, First-Out) principle. The class must include the methods `push(element)`, `pop()`, `peek()`, and `is_empty()`. Please ensure you handle 'Stack Underflow' by raising an error if `pop` or `peek` is called on an empty stack. Include clear docstrings for every method explaining what it does, its arguments, and its return values."

```
class Stack:
    """
    A class to represent a Stack data structure following the LIFO
    principle.
    """

    def __init__(self):
```

```
        """Initialize an empty list to store stack elements."""
        self.items = []

    def is_empty(self):
        """
        Check if the stack is empty.

        Returns:
            bool: True if the stack has no elements, False otherwise.
        """
```

```

        """
        return len(self.items) == 0

    def push(self, element):
        """
        Add an element to the top of the stack.

        Args:
            element: The item to be added to the stack.
        """
        self.items.append(element)
        print(f"Successfully pushed: {element}")

    def pop(self):
        """
        Remove and return the top element of the stack.

        Returns:
            The top element of the stack.

        Raises:
            IndexError: If the stack is empty (Stack Underflow).
        """
        if self.is_empty():
            raise IndexError("Stack Underflow: Cannot pop from an empty stack.")
        return self.items.pop()

    def peek(self):
        """
        Return the top element without removing it.

```

```

        Returns:
            The top element of the stack.

        Raises:

```

```

        IndexError: If the stack is empty.
    """
    if self.is_empty():
        raise IndexError("Stack is empty: Cannot peek.")
    return self.items[-1]

# --- TASK OUTPUT GENERATION ---
if __name__ == "__main__":
    print("--- Initializing Stack ---")
    my_stack = Stack()

    # Testing is_empty
    print(f"Is the stack empty? {my_stack.is_empty()}")


    # Testing push
    my_stack.push("Data Structure")
    my_stack.push("Algorithms")
    my_stack.push("AI Assistance")

    # Testing peek
    print(f"Top element (peek): {my_stack.peek()}")

    # Testing pop
    print(f"Popped element: {my_stack.pop()}")
    print(f"New top element after pop: {my_stack.peek()}")

    # Final check
    print(f"Stack size remaining: {len(my_stack.items)}")
    print("--- Stack Task Completed ---")

```

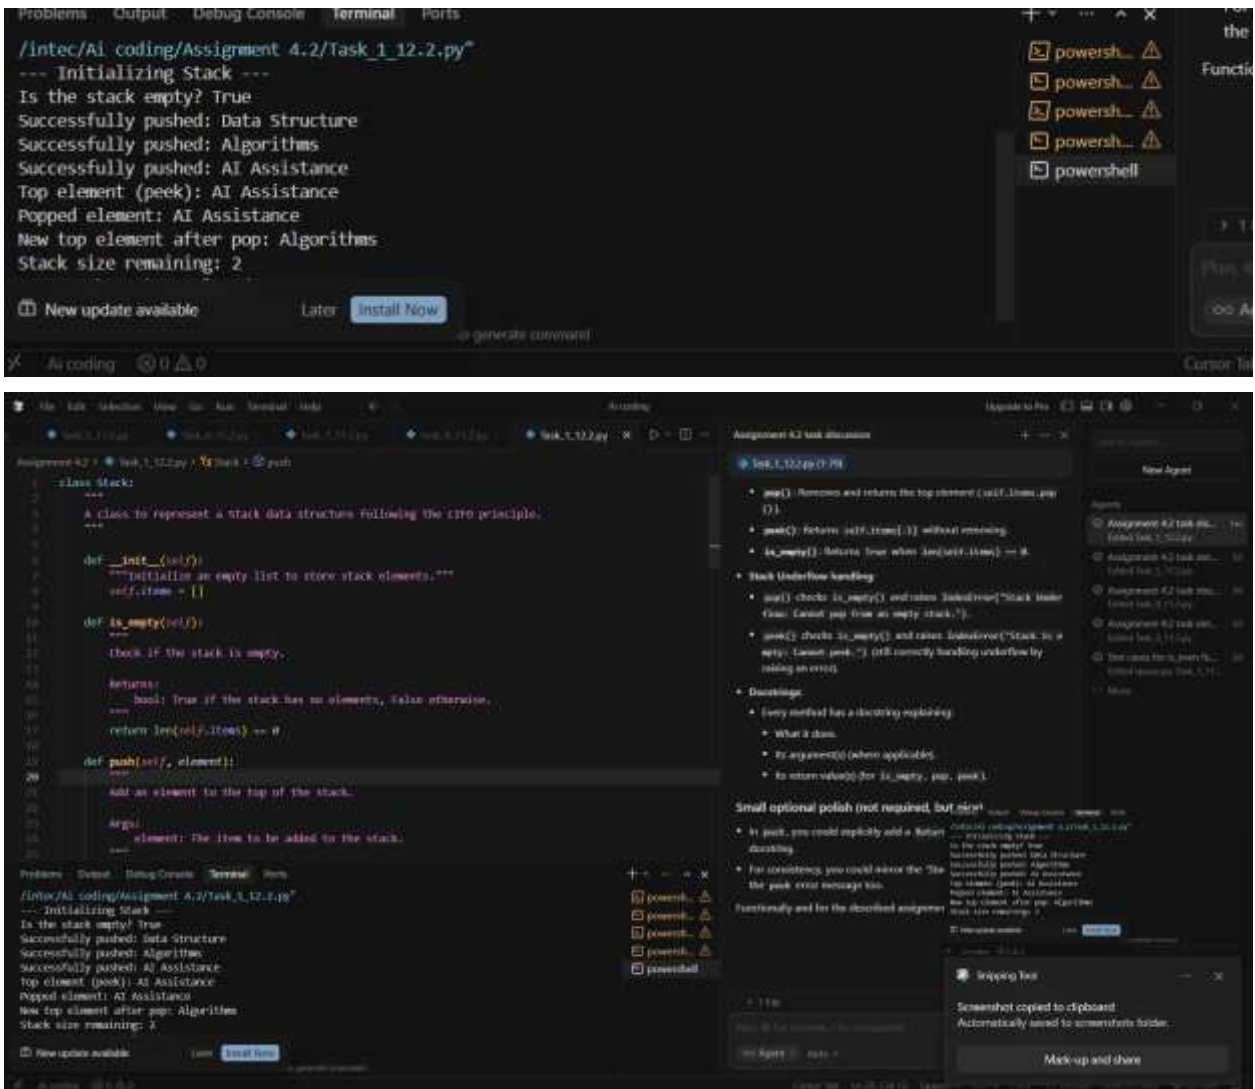

Task:2

Task Description -2 (Algorithms – Linear vs Binary Search Analysis)

➤ Task: Use AI to implement and compare Linear Search and Binary Search algorithms in Python.

Instructions:

- Prompt AI to generate:
- `linear_search(arr, target)`

- `binary_search(arr, target)`
- Include docstrings explaining:
- Working principle
- Test both algorithms using different input sizes.

Expected Output:

- Python implementations of both search algorithms.
- AI-generated comments and complexity analysis.
- Test results showing correctness and comparison.

Prompt: "Act as a Computer Science Tutor. Implement two Python functions: `linear_search(arr, target)` and `binary_search(arr, target)`. For the binary search, assume the input array is sorted. Include detailed docstrings for both explaining their working principles and time complexity ($O(n)$ vs $O(\log n)$). Finally, create a test suite that compares both algorithms using multiple cases: a target at the start, at the end, in the middle, and a target that does not exist in the array."

```
def linear_search(arr, target):
    """
        Search for target in array by checking each element in order.

        Working Principle:
        Iterates through each element of the array sequentially from the start
        until the target is found or the end of the array is reached.

    Complexity:
        - Time:  $O(n)$  – linear in the size of the array.
        - Space:  $O(1)$  – constant extra space.

    Args:
        arr: Sequence to search (list or similar).
```

target: Value to find.

Returns:

Index of the first occurrence of target, or -1 if not found.

```
"""
    for i in range(len(arr)):
        if arr[i] == target:
            return i # Return the index where target is found
return -1 # Return -1 if not found

def binary_search(arr, target):
    """
        Search for target in a sorted array by repeatedly halving the search
range.
        Working
Principle:
        Divide-and-conquer: compare target to the middle element; if equal,
return
        that index. If target is less than the middle, search the left half;
otherwise search the right half. Assumes the input array is sorted in
ascending order.

Complexity:
        - Time:  $O(\log n)$  – logarithmic in the size of the array.
        - Space:  $O(1)$  – iterative implementation uses constant extra space.

Args:
        arr: Sorted sequence to search (must be sorted in ascending
order).
        target: Value to find.

Returns:
        Index of target if present, or -1 if not found.
    """
    low = 0
```

```

high = len(arr) - 1

while low <= high:
    mid = (low + high) // 2
    if arr[mid] == target:
        return mid
    elif arr[mid] < target:
        low = mid + 1
else:

```

```

        high = mid - 1
    return -1

# --- TEST SUITE AND COMPARISON --- def
run_tests():

    """Compare linear_search and binary_search on the same cases."""
    # Sorted array (required for binary search)
    test_array = [10, 22, 35, 47, 50, 63, 75, 88, 99]

    test_cases = [
        {"name": "Target in the Middle", "target": 50},
        {"name": "Target at the Start ", "target": 10},
        {"name": "Target at the End   ", "target": 99},
        {"name": "Target Not Present ", "target": 100},
    ]

    print(f"{'Test Case':<25} | {'Target':<7} | {'Linear Index':<12} | {'Binary Index':<12}")
    print("-" * 70)

    for case in test_cases:
        target = case["target"]
        l_result = linear_search(test_array, target)
        b_result = binary_search(test_array, target)

        print(f"{case['name']:<25} | {target:<7} | {l_result:<12} | {b_result:<12}")

```




```
if __name__ == "__main__":
    run_tests()
```

Test Case	Target	Linear Index	Binary Index
Target in the Middle	50	4	4
Target at the Start	10	0	0
Target at the End	99	8	8
			-1

New update available. Later [Install Now](#)

generate command

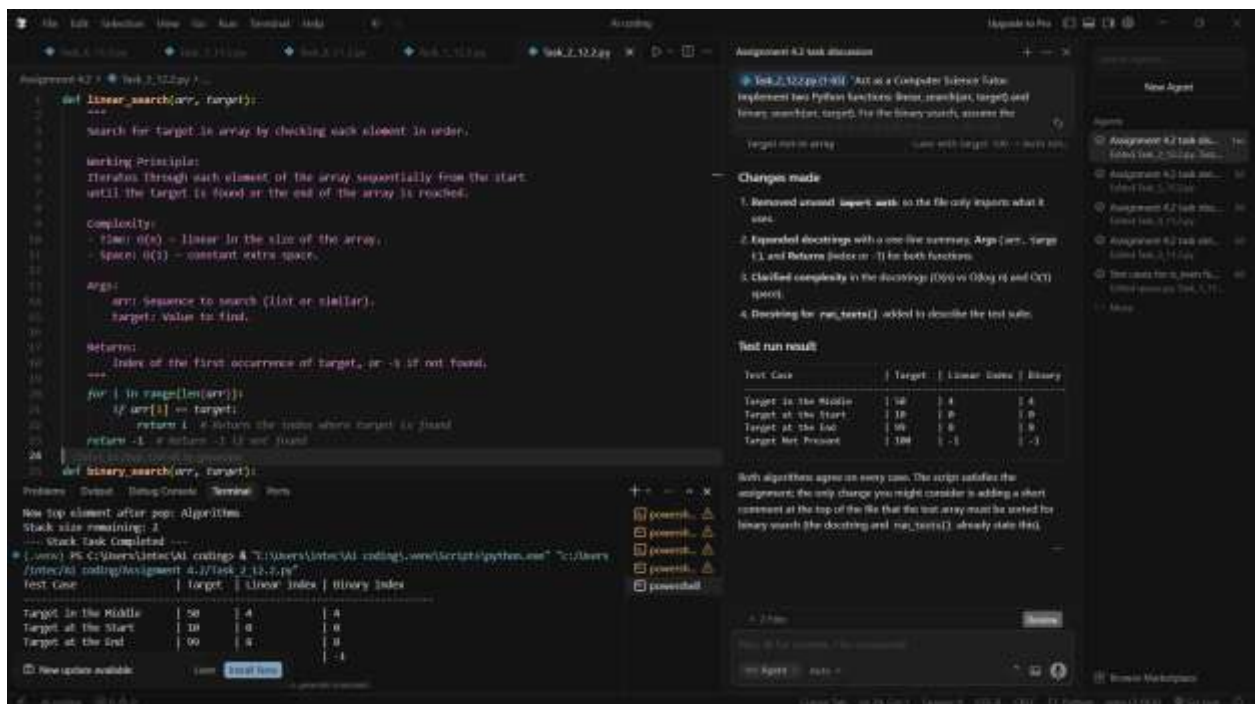

- Separate test file and implementation file.
- Test cases executed before implementation.
- Final implementation passing all test cases.

Prompt: "Act as a QA Engineer. Write a Python unit test script using the `unittest` library for a `Calculator` class. The tests should cover `add(a, b)` and `subtract(a, b)` methods.

Include test cases for positive numbers, negative numbers, and zeros. Do not provide the implementation yet." The implementation:

"Now, acting as a Developer, write the `Calculator` class that satisfies the unit tests provided in the previous step. Ensure the methods `add` and `subtract` are implemented correctly to pass all test cases."

```
"""
Unit tests for the Calculator class (add and subtract).
Covers positive numbers, negative numbers, and zeros.
"""

import unittest

try:
    from calculator import Calculator
except ImportError:
    Calculator = None

class TestCalculator(unittest.TestCase):
    """Test suite for Calculator.add and Calculator.subtract."""

    def setUp(self):
        """Create a Calculator instance before each
        test (or skip if not
        implemented)."""
        if Calculator is None:
            self.skipTest("Calculator class not implemented yet.")
```

```

self.calc = Calculator()

def test_add(self):
    """Test add(a, b): positive, negative, and zero cases."""
    # Positive numbers
    self.assertEqual(self.calc.add(10, 5), 15)
    # Negative numbers
    self.assertEqual(self.calc.add(-1, 1), 0)
    self.assertEqual(self.calc.add(-1, -1), -2)
    # Zeros
    self.assertEqual(self.calc.add(0, 0), 0)
    self.assertEqual(self.calc.add(5, 0), 5)
    self.assertEqual(self.calc.add(0, -3), -3)

def
test_subtract(self):
    """Test subtract(a, b): positive, negative, and zero cases."""
    # Positive numbers
    self.assertEqual(self.calc.subtract(10, 5), 5)
    self.assertEqual(self.calc.subtract(5, 10), -5)
    # Negative numbers
    self.assertEqual(self.calc.subtract(-1, -1), 0)
self.assertEqual(self.calc.subtract(-5, 3), -8)

    # Zeros
    self.assertEqual(self.calc.subtract(0, 0), 0)
    self.assertEqual(self.calc.subtract(5, 0), 5)
    self.assertEqual(self.calc.subtract(0, 4), -4)

if __name__ ==
"__main__":
    unittest.main()

```

Argument 4.2/Task_3.12.2.py"


powershell

Ran 2 tests in 0.000s

New update available

Later

Install Now

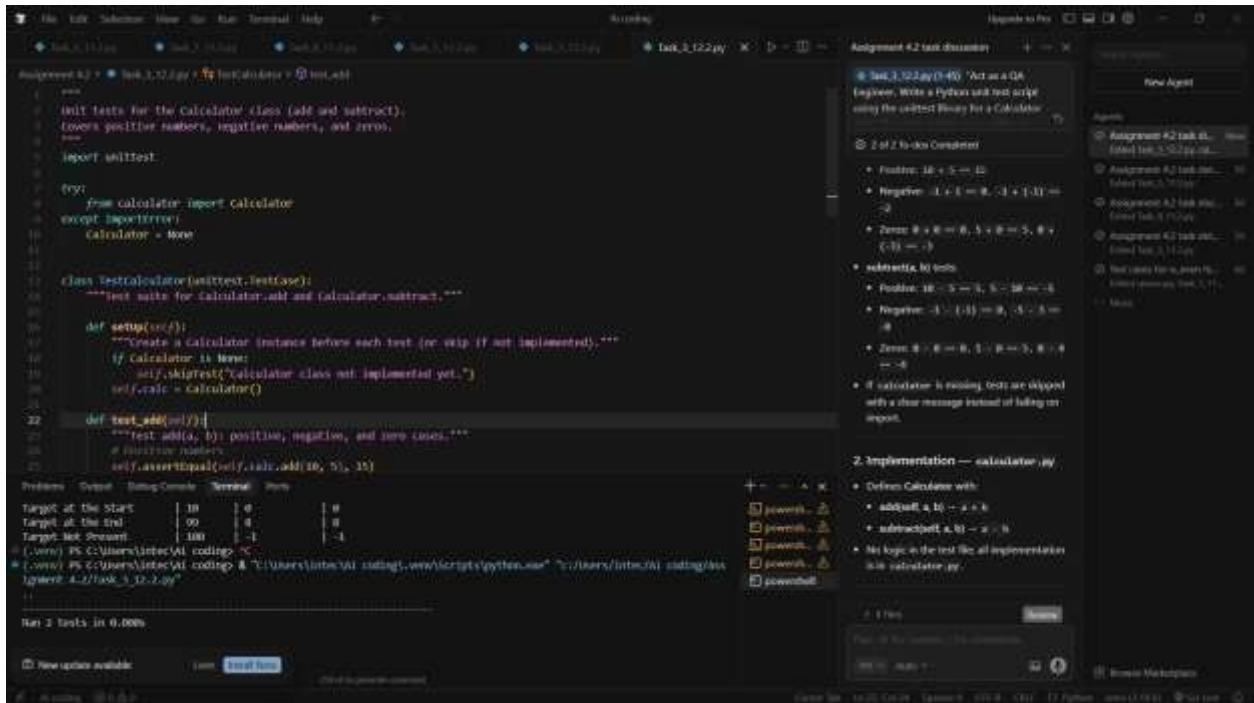

Task Description -4 (Data Structures – Queue Implementation with AI Assistance) ➤

Task:

Use AI assistance to generate a Python program that implements a Queue data structure.

Instructions:

➤ Prompt AI to create a Queue class with the following methods:

- enqueue(element)
- dequeue()
- front()
- is_empty()

➤ Handle queue overflow and underflow conditions.

➤ Include appropriate docstrings for all methods.

Expected Output:

➤ A fully functional Queue implementation in Python.

➤ Proper error handling and documentation.

Prompt:"Act as a Python Developer. Implement a `Queue` class following the FIFO principle. The class must include `enqueue(element)`, `dequeue()`, `front()`, and `is_empty()` methods. Include a `max_size` parameter in the constructor to handle 'Queue Overflow' and ensure 'Queue Underflow' is handled when dequeuing from an empty queue. Provide clear docstrings for all methods and a driver script to demonstrate the output."

```
class Queue:
    """
    A class to represent a Queue data structure (FIFO).
    """

    def __init__(self, max_size=5):
        """
        Initialize the queue with a fixed maximum size.
        Args:
            max_size (int): The maximum number of elements the queue can
hold.
        """
        self.items = []
        self.max_size = max_size

    def is_empty(self):
        """Check if the queue is empty."""
        return len(self.items) == 0

    def is_full(self):
        """Check if the queue has reached
its maximum capacity."""
        return len(self.items) >= self.max_size

    def enqueue(self, element):
        """
        Add an element to the back of the queue.
        Raises:
            OverflowError: If the queue
is already full.
```

```

        """
        if self.is_full():
            raise OverflowError("Queue Overflow: Cannot enqueue to a full
queue.")
        self.items.append(element)
        print(f"Enqueued: {element}")

def dequeue(self):
    """
    Remove and return the front element of the queue.
    Returns:
    The front element.
    Raises:
    IndexError: If the queue is empty (Underflow).
    """
    if self.is_empty():
        raise IndexError("Queue Underflow: Cannot dequeue from an
empty queue.")
    return self.items.pop(0)

def front(self):
    """Return the front element without removing it."""
    if self.is_empty():
        raise IndexError("Queue is empty: No front element.")
    return self.items[0]

# --- DRIVER CODE FOR OUTPUT ---
if __name__ == "__main__":
    print("--- Initializing Queue (Max Size: 3) ---")
    my_queue = Queue(max_size=3)

    # 1. Test Enqueue
    my_queue.enqueue("Task A")
    my_queue.enqueue("Task B")
    my_queue.enqueue("Task C")

    # 2. Test Front

```

```
print(f"Front element is: {my_queue.front()}")

# 3. Test Dequeue (FIFO Logic)
print(f"Dequeued: {my_queue.dequeue()}")
print(f"New front element: {my_queue.front()}")

# 4. Test Overflow Catching
try:

    print("Attempting to overfill...")
    my_queue.enqueue("Task D")
    my_queue.enqueue("Task E") # This should trigger the Overflow
except OverflowError as e:
    print(f"Error Caught: {e}")
```

Assignment 4.2 / Task 4.3.2.2.py
--- Initializing Queue (Max Size: 3) ---
Enqueued: Task A
Enqueued: Task B
Enqueued: Task C
Front element is: Task A
Dequeued: Task A
New front element: Task B
Attempting to overfill...
Enqueued: Task D
Error Caught: 'Queue' object is not a full queue.

New update available. Later. [Install Now](#)

```
class Queue:
    """
    A class to represent a Queue data structure (FIFO).
    """
    def __init__(self, max_size=5):
        """
        Initialize the queue with a fixed maximum size.
        Args:
            max_size (int): The maximum number of elements the queue can hold.
        """
        self._items = []
        self._max_size = max_size

    def is_empty(self):
        """Check if the queue is empty."""
        return len(self._items) == 0

    def is_full(self):
        """Check if the queue has reached its maximum capacity."""
        return len(self._items) == self._max_size

    def enqueue(self, element):
        """Add an element to the back of the queue.
        """
```

Assignment 4.2 / Task 4.3.2.2.py
--- Initializing Queue (Max Size: 3) ---
Enqueued: Task A
Enqueued: Task B
Enqueued: Task C
Front element is: Task A
Dequeued: Task A
New front element: Task B
Attempting to overfill...
Enqueued: Task D
Error Caught: 'Queue' object is not a full queue.

New update available. Later. [Install Now](#)

Assignment 4.2 task discussion

Task 4.3.2.2.py (1/10) "Not as a Python Developer: Implement a Queue data structure following the FIFO principle. The class must:"

- `__init__`, `enqueue`, `dequeue`, `front` (base docstrings that explain what they do).
- The class itself has a docstring describing it as a FIFO queue.
- Driver script:
 - Under `if __name__ == "__main__":` you:
 - Create a queue with `max_size=3`.
 - Enqueue three items.
 - Show `front()`.
 - `dequeue()` once and show the new `front`.
 - Attempt to enqueue beyond capacity inside a `try/except` block (add a `try/except` block to demonstrate overflow handling).

If you want to polish further, you could expand the docstrings for `is_empty`, `is_full`, `front` to explicitly include Return and Raises for `front`, but for the assignment as written, what you have is already correct.

Run in the console. Ctrl+Enter

Run in the console. Ctrl+Enter

Task Description -5 (Algorithms – Bubble Sort vs Selection Sort)

➤ Task:

Use AI to implement Bubble Sort and Selection Sort algorithms and compare their behavior.

Instructions:

➤ Prompt AI to generate:

- `bubble_sort(arr)`
- `selection_sort(arr)`

➤ Include comments explaining each step.

➤ Add docstrings mentioning time and space complexity.

Expected Output:

- Correct Python implementations of both sorting algorithms.

- Complexity analysis in docstrings. Prompt:

Act as an Algorithms Instructor. Implement `bubble_sort(arr)` and `selection_sort(arr)` in Python. For each function, include a detailed docstring explaining the time complexity ($O(n^2)$) and space complexity ($O(1)$). Inside the code, use comments to explain how the loops and swaps work. Finally, provide a test script that sorts the same unsorted list using both methods and prints the results."

```
def bubble_sort(arr):  
    """  
        Sort a list in ascending order by repeatedly swapping adjacent  
elements.  
        Working  
Principle:  
        Repeatedly steps through the list, compares adjacent elements, and  
swaps  
        them if they are in the wrong order. The largest elements 'bubble' up  
to
```


the end of the list. Each full pass places one more element in final position.

Complexity:

- Time: $O(n^2)$ – quadratic; nested loops over n elements.
- Space: $O(1)$ – in-place; only a fixed number of variables used.

Args:

arr: List of comparable elements (modified in place).

Returns:

The same list, now sorted in ascending order.

```
"""
n = len(arr)
# Outer loop: each pass places the next largest element at the end
for i in range(n):
    # Inner loop: only compare up to n - i - 1 (later positions
    already sorted)
    for j in range(0, n - i - 1):
        if arr[j] > arr[j + 1]:
            # Swap so the larger value moves toward the end
            arr[j], arr[j + 1] = arr[j + 1], arr[j]
    return arr
def
selection_sort(arr):
```

```
    """
```

Sort a list in ascending order by repeatedly selecting the minimum.

Working Principle:

Keeps a sorted region at the front and an unsorted region after it.

Each

pass finds the smallest element in the unsorted region and swaps it with

the first unsorted element, extending the sorted region by one.

Complexity:

- Time: $O(n^2)$ – quadratic; nested loops over n elements.
- Space: $O(1)$ – in-place; only a fixed number of variables used.

Args:

arr: List of comparable elements (modified in place).

Returns:

The same list, now sorted in ascending order.

```
"""
    n =
len(arr)

# Outer loop: position i is where the next minimum will be placed
for i in range(n):
    min_idx = i
    # Inner loop: scan unsorted part (from i+1 to end) for the minimum
    for j in range(i + 1, n):
        if arr[j] < arr[min_idx]:
            min_idx = j
    # Swap: put minimum at position i, extend sorted region
    arr[i], arr[min_idx] = arr[min_idx], arr[i]
return arr

# --- TEST SCRIPT: SAME UNSORTED LIST, BOTH METHODS ---
if __name__ == "__main__":
    sample_data = [64, 34, 25, 12, 22, 11, 90]

    print(f"Original Array:      {sample_data}")
    # Use .copy() so both sorts start from the same unsorted data
    bubble_res = bubble_sort(sample_data.copy())
    print(f"Bubble Sort Result:    {bubble_res}")

    selection_res = selection_sort(sample_data.copy())
    print(f"Selection Sort Result: {selection_res}")
```

Segment 4.2/Task 5_12.2.py

Original Array: [64, 34, 25, 12, 22, 11, 90]

Bubble Sort Result: [11, 12, 22, 25, 34, 64, 90]

Selection Sort Result: [11, 12, 22, 25, 34, 64, 90]

(.venv) PS C:\Users\Inter\AI coding>

Ctrl+K to generate comments

