

veehicle selection

```
In [16]: import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
from sklearn import preprocessing, svm
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
```

```
In [2]: df=pd.read_csv(r"C:\Users\anu\Downloads\fiat500_VehicleSelection_Dataset.csv")
df
```

Out[2]:

	ID	model	engine_power	age_in_days	km	previous_owners	lat	lon	price
0	1	lounge	51	882	25000	1	44.907242	8.611560	8900
1	2	pop	51	1186	32500	1	45.666359	12.241890	8800
2	3	sport	74	4658	142228	1	45.503300	11.417840	4200
3	4	lounge	51	2739	160000	1	40.633171	17.634609	6000
4	5	pop	73	3074	106880	1	41.903221	12.495650	5700
...
1533	1534	sport	51	3712	115280	1	45.069679	7.704920	5200
1534	1535	lounge	74	3835	112000	1	45.845692	8.666870	4600
1535	1536	pop	51	2223	60457	1	45.481541	9.413480	7500
1536	1537	lounge	51	2557	80750	1	45.000702	7.682270	5990
1537	1538	pop	51	1766	54276	1	40.323410	17.568270	7900

1538 rows × 9 columns

```
In [3]: df=df[['age_in_days','km']]
df.columns=['age','km']
```


```
In [4]: df.head(10)
```

Out[4]:

	age	km
0	882	25000
1	1186	32500
2	4658	142228
3	2739	160000
4	3074	106880
5	3623	70225
6	731	11600
7	1521	49076
8	4049	76000
9	3653	89000

```
In [5]: sns.lmplot(x = "age", y= "km", data = df, order = 2, ci = None)
```

```
Out[5]: <seaborn.axisgrid.FacetGrid at 0x598c863350>
```

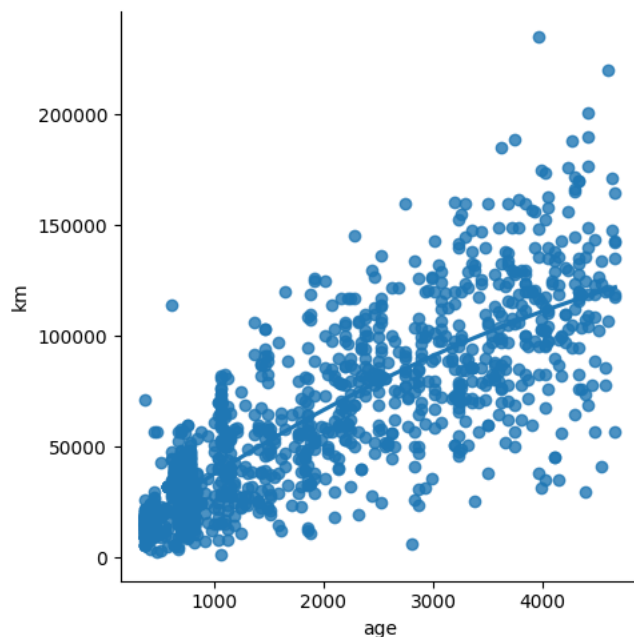

```
In [6]: df.describe()
```

```
Out[6]:
```

	age	km
count	1538.000000	1538.000000
mean	1650.980494	53396.011704
std	1289.522278	40046.830723
min	366.000000	1232.000000
25%	670.000000	20006.250000
50%	1035.000000	39031.000000
75%	2616.000000	79667.750000
max	4658.000000	235000.000000

```
In [7]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 1538 entries, 0 to 1537
Data columns (total 2 columns):
#   Column  Non-Null Count  Dtype
---  -
0    age      1538 non-null    int64
1    km       1538 non-null    int64
dtypes: int64(2)
memory usage: 24.2 KB
```

```
In [8]: df.fillna(method = 'ffill', inplace = True)
```

C:\Users\anu\AppData\Local\Temp\ipykernel_5596\1930596415.py:1: SettingWithCopyWarning:
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy (https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy)
df.fillna(method = 'ffill', inplace = True)

```
In [9]: X = np.array(df['age']).reshape(-1, 1)
Y = np.array(df['km']).reshape(-1, 1)
```

```
In [10]: df.dropna(inplace = True)
```


C:\Users\anu\AppData\Local\Temp\ipykernel_5596\1791587065.py:1: SettingWithCopyWarning:
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy (https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy)
df.dropna(inplace = True)

```
In [11]: X_train,X_test,Y_train,Y_test=train_test_split(X,Y,test_size=0.25)
regr = LinearRegression()
regr.fit(X_train, Y_train)
print(regr.score(X_test, Y_test))
```


0.7105842248847445

```
In [12]: y_pred=regr.predict(X_test)
plt.scatter(X_test, Y_test,color='b')
plt.plot(X_test,y_pred,color='k')
plt.show()
```

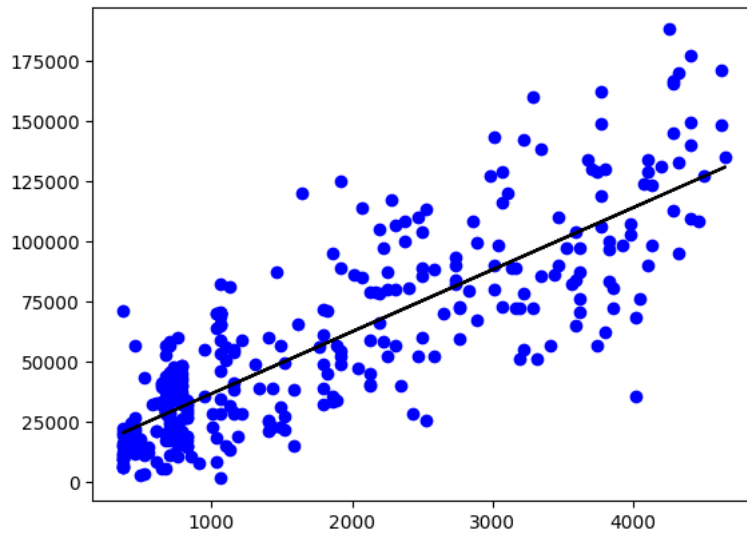


```
In [13]: df500 = df[:][:500]
sns.lmplot(x = "age",y = "km", data = df500,order = 1,ci = None)
```

Out[13]: <seaborn.axisgrid.FacetGrid at 0x598c8e6510>

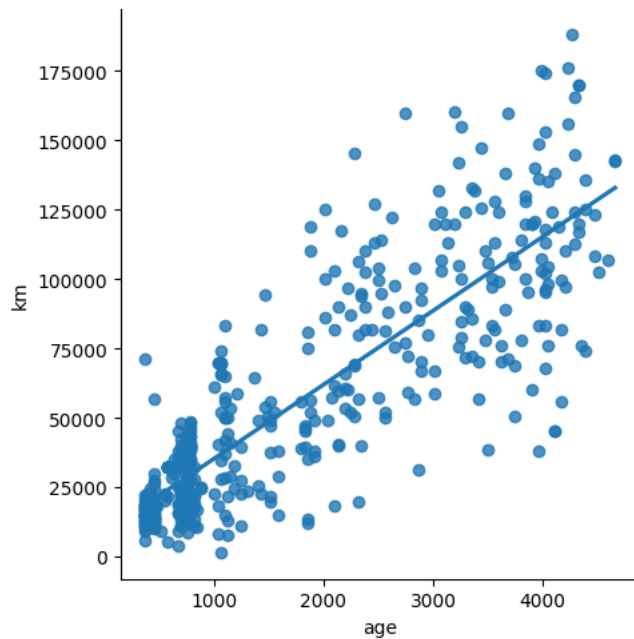

```
In [14]: df500.fillna(method = 'ffill',inplace = True)
X = np. array(df500['age']).reshape(-1, 1)
y = np.array(df500['km']).reshape(-1, 1)
df500.dropna(inplace = True)
X_train,X_test,y_train,y_test=train_test_split(X,y,test_size=0.25)
regr = LinearRegression()
regr.fit(X_train,y_train)
print("Regression:",regr.score(X_test,y_test))
y_pred=regr.predict(X_test)
plt.scatter(X_test,y_test,color = 'b')
plt.plot(X_test,y_pred,color = 'k')
plt.show()
```

Regression: 0.6624184900025549

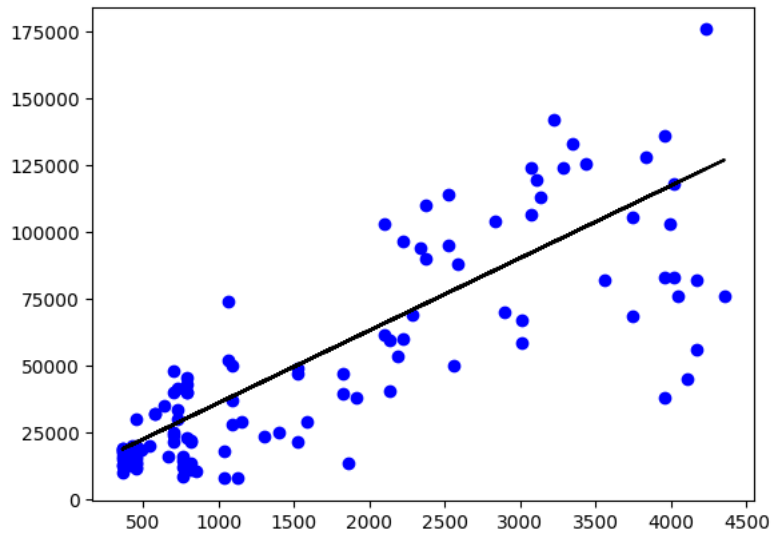

```
In [15]: from sklearn.linear_model import LinearRegression
from sklearn.metrics import r2_score
model = LinearRegression()
model.fit(X_train,y_train)
y_pred = model.predict(X_test)
r2=r2_score(y_test,y_pred)
print("R2 score:",r2)
```

R2 score: 0.6624184900025549

In []: