SUB-DOMAIN ENUMERATION TOOL INSTALLATION AND USAGE IN VMWARE WORKSTATION LINUX...

1. jonluca/Anubis

Subdomain enumeration and information gathering tool

Click on the **onluca/Anubis** link . After it will redirect to this page..

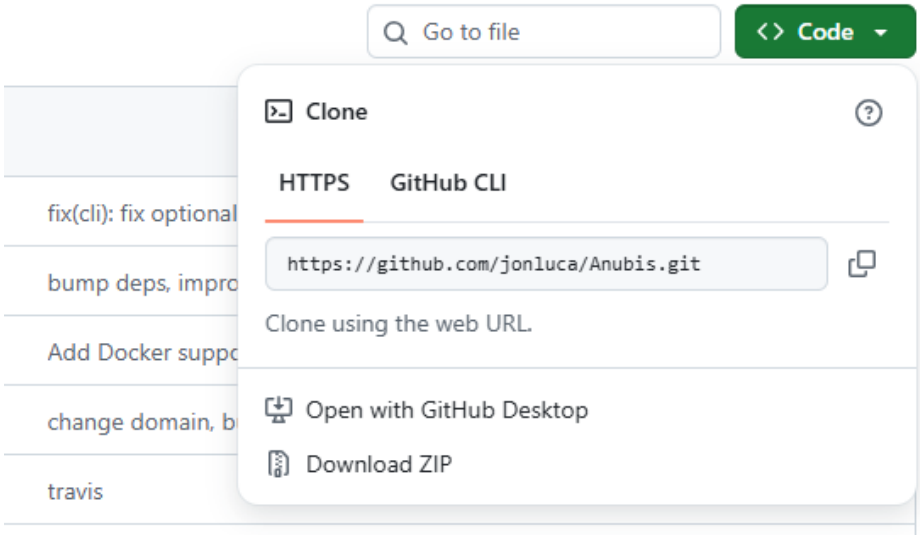

Copy the URL (https://github.com/jonluca/Anubis.git)

Paste the URL in Linux with command "git clone"

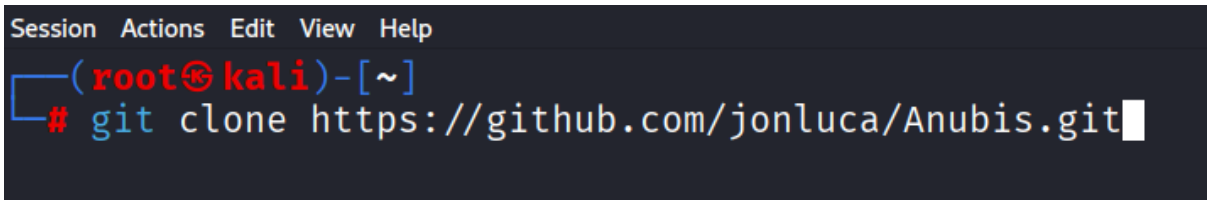

After click "Enter" Button

```
┌──(root㉿kali)-[~]
└─# git clone https://github.com/jonluca/Anubis.git
Cloning into 'Anubis' ...
remote: Enumerating objects: 1557, done.
remote: Counting objects: 100% (57/57), done.
remote: Compressing objects: 100% (14/14), done.
remote: Total 1557 (delta 43), reused 45 (delta 42), pack-reused 1500 (from 3)
Receiving objects: 100% (1557/1557), 307.63 KiB | 2.54 MiB/s, done.
Resolving deltas: 100% (898/898), done.

┌──(root㉿kali)-[~]
└─#
```

After that. Give the Command "cd Anubis"

```
┌──(root㉿kali)-[~]
└─# cd Anubis

┌──(root㉿kali)-[~/Anubis]
└─#
```

It Will Move to [/Anubis]

After type "ls"command . It shows list files and directories in the current working directory...

```
┌──(root㉿kali)-[~/Anubis]
└─# ls
anubis              coverage.svg        LICENSE       renovate.json     setup.py
CODE_OF_CONDUCT.md  Dockerfile          MANIFEST.in   requirements.txt  tests
CONTRIBUTING.md     ISSUE_TEMPLATE.md   README.md     setup.cfg

┌──(root㉿kali)-[~/Anubis]
└─#
```

Here " requirements.txt" will be showing

A requrements.txt file is used in python projects to list all the external packages(libraries) that project needs to run..

It helps others (or servers) install the exact same dependies....

What is requirements.txt?

It is a simple text file that contains the names and versions of **python** packages your projects depend up on……

So here we install all dependencies at once ..

To run a command'' pip3 install –r requirements.txt''

```
┌──(root㉿kali)-[~/Anubis]
└─# pip3 install -r requirements.txt
error: externally-managed-environment

× This environment is externally managed
╰─> To install Python packages system-wide, try apt install
    python3-xyz, where xyz is the package you are trying to
    install.
```

You Get an ERROR like this.

Why this Error Comes???

That error appears **because you're trying to install a package into the system Python**, which is locked by Debian/Ubuntu/Kali.
To fix this, you **must** install packages either:

- in a **virtual environment (recommended)**
- or using `--user`

`apt install python3-httpx` **will NOT work** because `httpx` is not in apt.

Solution: Create a virtual environment (this avoids the externally-managed error)

Run these commands: python3 –m venv (murali)-here you will give any name

Source murali/bin/activate

So what would I done ?

I created a virtual environment named **murali (python3 -m venv murali).**

I You activated it (**source murali/bin/activate**)

Now that prompt shows (**(murali)–(root㉿kali)**)

```
┌──(root㉿kali)-[~/Anubis]
└─# python3 -m venv murali

┌──(root㉿kali)-[~/Anubis]
└─# source murali/bin/activate

┌──(murali)─(root㉿kali)-[~/Anubis]
└─#
```

So Now we are in the **Anubis project directory** and you have a Python virtual environment named `murali`

What does this mean?

Inside this environment:

- You can install Python packages **without errors**
- No more "externally managed environment" issues
- Packages install **only inside this folder**, not system-wide
- `pip` works normally

So now i can install our dependencies like requirements.txt using" **pip3 install –r** command.

```
┌──(murali)─(root㉿kali)-[~/Anubis]
└─# pip3 install -r requirements.txt
Collecting setuptools (from -r requirements.txt (line 1))
  Downloading setuptools-80.9.0-py3-none-any.whl.metadata (6.6 kB)
Collecting python_nmap==0.7.1 (from -r requirements.txt (line 2))
  Downloading python-nmap-0.7.1.tar.gz (44 kB)
  Installing build dependencies ... done
  Getting requirements to build wheel ... done
  Preparing metadata (pyproject.toml) ... done
```

pip is installing the packages listed in requirements.txt

After that path Move to this Directory

```
┌──(murali)─(root㉿kali)-[~/Anubis]
└─#
```

`Give the Command pip3 install.`

```
┌──(murali)-(root㉿kali)-[~/Anubis]
└─# pip3 install .
Processing /root/Anubis
  Installing build dependencies ... done
  Getting requirements to build wheel ... done
  Preparing metadata (pyproject.toml) ... done
Requirement already satisfied: setuptools in ./murali/lib/python3.13/site-packag
es (from anubis-netsec==1.3.1) (80.9.0)
```

Everything is working correctly.

After That I you will use "ls" command to check what are the files adn directories were stored in Anubis project Directory....

It will shown like this:

```
┌──(murali)-(root㉿kali)-[~/Anubis]
└─# ls
anubis                  coverage.svg        murali              setup.py
anubis_netsec.egg-info  Dockerfile          README.md           tesla.txt
build                   ISSUE_TEMPLATE.md   renovate.json       tests
CODE_OF_CONDUCT.md      LICENSE             requirements.txt
CONTRIBUTING.md         MANIFEST.in         setup.cfg
```

Once Complete this and give the command cd.anubis

```
┌──(murali)-(root㉿kali)-[~/Anubis]
└─# cd anubis

┌──(murali)-(root㉿kali)-[~/Anubis/anubis]
└─#
```

you're now **inside the anubis subfolder** of the project. That's usually where the main Python scripts live.

Here's what to do next to run the project properly in your virtual environment:

Set's target to `domain.com`, (t) outputs additional information (i) like server and ISP or server hosting provider, then attempts to resolve all URLs (p) and outputs list of unique IPs and sends to Anubis-DB (a). Finally, writes all results to out.txt (o).

Given Target Domain and Run Anubis Tool to Subdomain Enumeration.

```
┌──(murali)-(root㉿kali)-[~/Anubis]
└─# anubis -tip tesla.com -o tesla.txt

         d8888                    888      d8b
        d88888                    888      Y8P
       d88P888                    888
      d88P 888 88888b.  888  888 88888b.  888 .d8888b
     d88P  888 888 "88b 888  888 888 "88b 888 88K
    d88P   888 888  888 888  888 888  888 888 "Y8888b.
   d8888888888 888  888 Y88b 888 888 d88P 888      X88
  d88P     888 888  888  "Y88888 88888P"  888  88888P'
```

```
Found 757 subdomains
____________________
akamai-apigateway-ops-warp3pl.tesla.com: 23.205.216.146
tesla.com: 2.18.49.207
owner-api.eng.vn.cloud.tesla.com:
obs.tesla.com:
tssapi-stg.tesla.com:
auth-global.tesla.com: 23.205.216.146
sandbox-studio.courses.tesla.com:
logcollector-ext.tesla.com: 23.9.121.4
akamai-apigateway-stg-warp3pl.tesla.com: 23.205.216.146
github-ap.tesla.com:
em7799.tesla.com:
url4104.tesla.com: 54.250.209.117
secureaccess.tesla.com:
npm.extgithub.tesla.com:
mta.email.tesla.com: 13.111.14.190
mobile.kronos.tesla.com: 54.70.167.244
```

It Found 757 Subdomains....