



Spring 2021 Setup Guide [For Q4]

Getting Started

A video tutorial has been created to help walk through the steps of GCP setup.

You can watch the video for:

- Creating [Project](#)
- Creating [Bucket](#)
- Creating [Cluster](#)

NOTE:

1. Ensure you are using personal GMAIL account. Do not use GMAIL account associated with any organization or university.
2. This setup guide is designed to help students quick start GCP Setup and assumes the GMAIL account used is setting up GCP account for the first time. The screens might vary based on your GCP account and this is excepted. Use this guide as a starting point and as a heuristic to identify and setup the GCP Storage buckets and Dataproc Cluster on your own based on the vagaries of your Google Account.

(Students are expected to setup the storage buckets and the clusters on their own. This guide is for reference only, and is not meant to serve as a step-by-step guide due to the variations in individual google accounts)

Instructions to setup GCP Storage buckets and Dataproc Cluster are provided below:

Please make sure you have a Google account and if you don't have one, you would need to create a new account.

1. Login into your account using this [link](#)
2. Access your GCP coupon through the canvas assignment as shown below.

CSE6242OAN,O01,O3 > Assignments

Spring 2021

Search for assignment

Home

Announcements

Modules

Piazza

Assignments

Gradescope

Quizzes

Media Gallery

Honorlock

Office 365

Grades

People

Well-Being Connect

CIOS

Mental Health Resources

▼ Upcoming assignments

HW1
Available until 15 Feb at 6:59 | Due 13 Feb at 6:59 | ~100 pts

▼ Undated assignments

Google Cloud Platform Coupon Code

3. Enter your free educational credits using this [link](#).

Google Cloud Platform Select a project Search products and resources

GCP credit application

Fill in the following information below to apply GCP credits to your account listed below.

First name *
George

Last name *
Burdell

Account email
burdell.george@gmail.com

Credits will be applied to this account. If you'd like to apply credits to a different account, specify your preference [here](#).

Coupon code *

Terms and conditions


The following [Terms of Service](#) apply to the credit you received for Google Cloud products.

ACCEPT AND CONTINUE

* Indicates required

- When you enter the educational credits, Google automatically creates a new billing account named “Billing Account for Education” and activate the “free trial option” at the top right corner of the console.

Note: You might not need to activate if you have previously used GCP with educational credits.

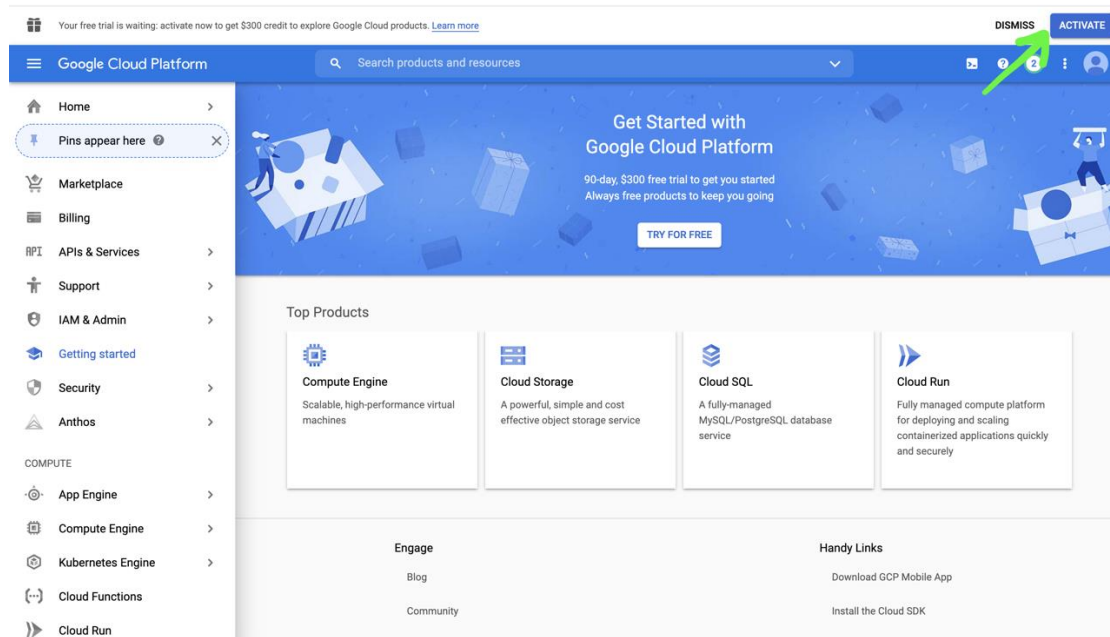



- You will need to enter default billing credit card information if you are using GCP for first time. This is to confirm it is a human and you may need to give your personal credit card details for billing (money would not be deducted from your card). Please make sure to use the billing account named “Billing Account for Education” is linked to a new project which will be used to create your storage and clusters (details in step 7). **Don't use your own personal billing account otherwise the free educational credits will not be applied.**


Try Google Cloud Platform for free

Step 2 of 2

Customer info

 Account type ⓘ 

Individual ▼

 Name and address ⓘ

Name

Name is required

Address line 1

Address line 1 is required

Address line 2

City

City is required

State ▼ ZIP code ⓘ

State is required ZIP code is required

Phone number (optional)

Access to all Cloud Platform Products


Get everything you need to build and run your apps, websites and services, including Firebase and the Google Maps API.

\$300 credit for free

Put Google Cloud to work with \$300 in credit to spend over the next 90 days.

No autocharge after free trial ends

We ask you for your credit card to make sure you are not a robot. You won't be charged unless you manually upgrade to a paid account.

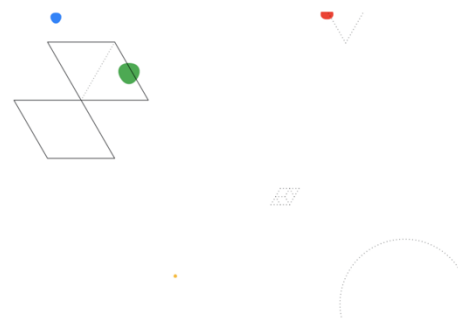


ZIP code ⓘ

State ▼ ⓘ

State is required ZIP code is required


Phone number (optional)

How you pay

 Automatic payments

You pay for this service only after you accrue costs, via an automatic charge when you reach your billing threshold or 30 days after your last automatic payment, whichever comes first.

Payment method ⓘ

 Add credit or debit card ▼

#

Card number	MM	YY	CVC
Card number is required	Month is required	Year is required	CVC is required

Cardholder name

☒ Credit or debit card address is same as above

Access to all Cloud Platform Products


Get everything you need to build and run your apps, websites and services, including Firebase and the Google Maps API.

\$300 credit for free

Put Google Cloud to work with \$300 in credit to spend over the next 90 days.

No autocharge after free trial ends


We ask you for your credit card to make sure you are not a robot. You won't be charged unless you manually upgrade to a paid account.

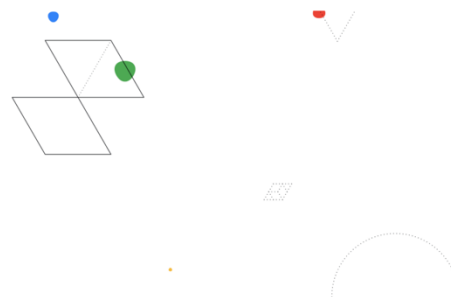


START MY FREE TRIAL

6. Go to [Google Console Home](#)

7. On the top left menu on the blue banner, click on dropdown to “select a project” (or if you already have existing projects, it will list the latest project. Click on the drop down in this case as well)

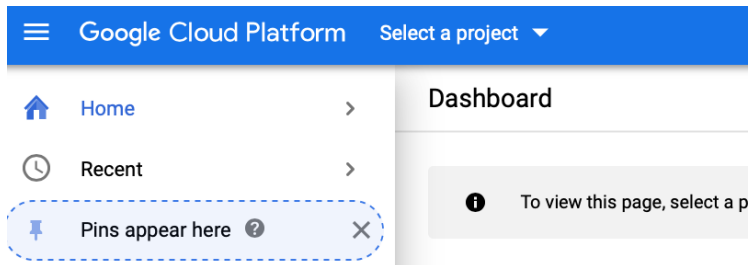

8. Click on New Project on the top right corner

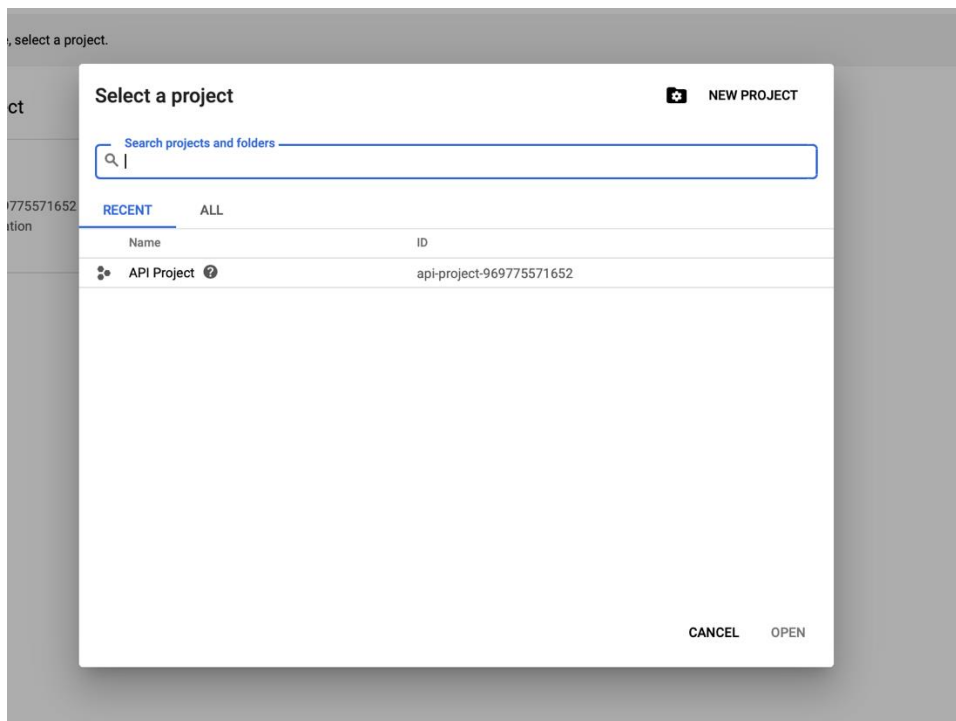

9. Enter CSE6242 (or any other default name) and create a new project.

Google Cloud Platform

Search products and resources

New Project

You have 20 projects remaining in your quota. Request an increase or delete projects. [Learn more](#)

[MANAGE QUOTAS](#)

Project name *

CSE6242

Project ID: cse6242-304303. It cannot be changed later. [EDIT](#)

Billing account *

Billing Account for Education

Any charges for this project will be billed to the account you select here.

Location *

No organization

BROWSE

Parent organization or folder

CREATE

CANCEL

Note: The new Project CSE6242 should be linked to the Billing Account “Billing Account for Education”. This step can be achieved while creating a new project in step 7 as listed above. If you have only one billing account (namely Billing Account “Billing Account for Education”, it will automatically link your project to Billing Account “Billing Account for Education”.

10. Wait till the new project is created.

Google Cloud Platform

CSE6242

Search products and resources

Home

Recent

Pins appear here

Marketplace

Billing

APIs & Services

Support

IAM & Admin

Getting started

Security

Anthos

COMPUTE

App Engine

Compute Engine

Kubernetes Engine

Cloud Functions

Cloud Run

VMware Engine

STORAGE

Cloud Storage

DASHBOARD

ACTIVITY

RECOMMENDATIONS

How Google Cloud is helping during COVID-19 [Learn more](#)

Project info

Project name

CSE6242

Project ID

cse6242-304303

Project number

253846610915

ADD PEOPLE TO THIS PROJECT

Go to project settings

Resources

This project has no resources

Trace

No trace data from the past 7 days

Get started with Trace

Getting Started

APIs

Explore and enable APIs

Deploy a prebuilt solution

Learn how to set up Error Reporting

APIs

Requests (requests/sec)

1.0

0.8

0.6

0.4

0.2

0

11:15

11:30

11:45

Go to APIs overview

Google Cloud Platform status

All services normal

Go to Cloud status dashboard

Billing

Estimated charges

For the billing period Sep 1 - 26, 2020

USD

View detailed charges

Monitoring

Set up alerting policies

Create uptime checks

View all dashboards

Go to Monitoring

Error Reporting

No sign of any errors. Have you set up Error Reporting?


Learn how to set up Error Reporting

Uploading data files to Spark compatible Google Cloud storage

We have listed the main steps from the documentation for uploading data file to your Google Cloud Platform:

Note: The data can be found on this dropbox link: [yellow_tripdata 2019-01.csv](#)

1. Go to [Google Storage Home Page](#)
2. On the top left corner, make sure the project is CSE6242 and Then choose 'storage' from the menu on the left-hand side.

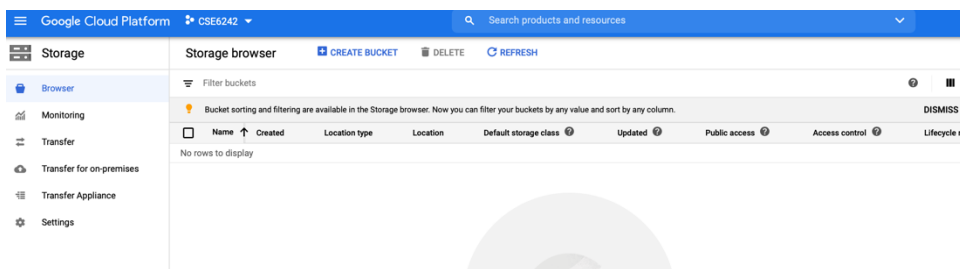

3. Click "CREATE BUCKET" to create a bucket.
 - a. Use your GT Username as bucket name.
 - b. Choose Location Type as "Region - Lowest Latency within a Single Region" (to minimize cost) and choose the closest location. For example, us-east4 (Northern Virginia) for students in east coast.
 - c. Choose "Standard" storage class.
 - d. Choose "Access Control" as "Fine Grained"
 - e. Other settings - leave them as default.


Once the bucket is created, click "UPLOAD FILES" and select **yellow_tripdata 2019-01.csv** from your local computer to upload to your bucket. The uploading process may take some time. You will see upload complete message and you will be able to view the yellow_tripdata_2019-01.csv file in the bucket.

Creating Clusters in Google DataProc (With Spark and Jupyter Notebook Components)

Google DataProc can be used to create an Apache Spark distribution cluster. This means that it handles large amounts of data on demand. The next step is to use Google's DataProc web-based management tool to create a Linux cluster. Follow the recommended steps shown to create a new cluster (or see full documentation here on [GCP site](#)).

Follow the steps in the below link to create the cluster:

1. Go to [Google Data Proc home page](#)
2. On the top left corner, make sure the project is CSE6242.

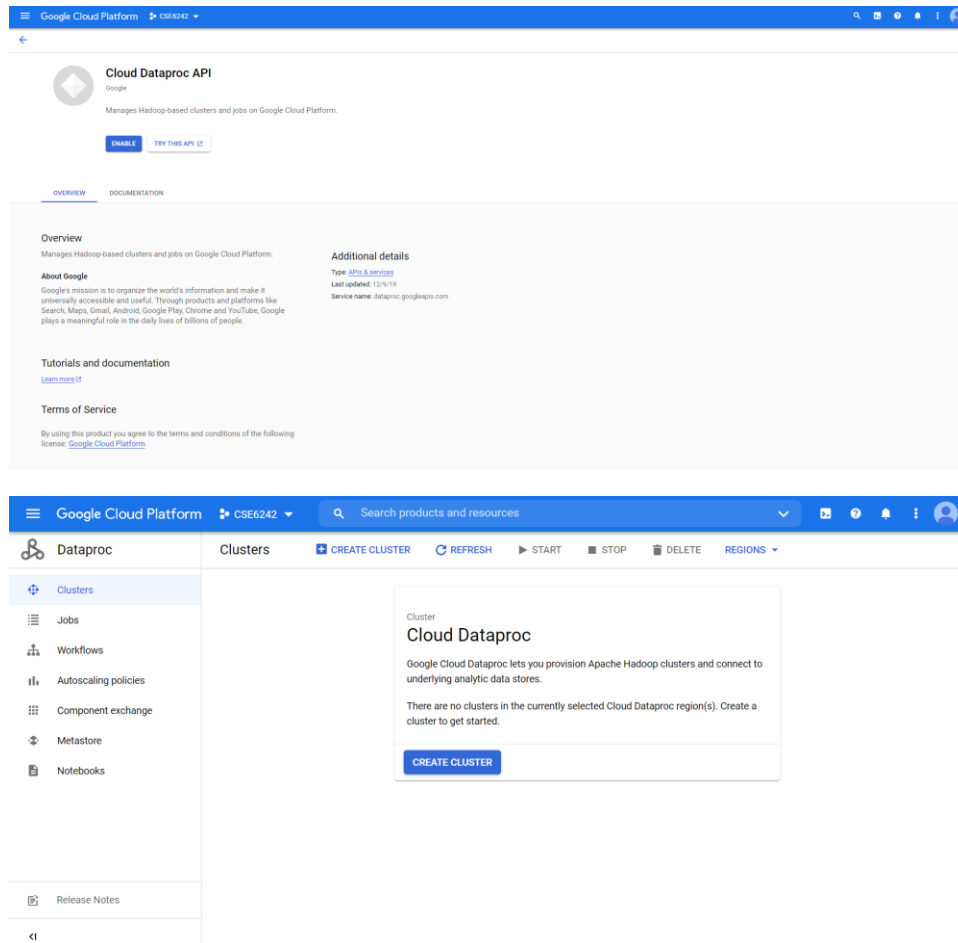

3. Enable API and Click CREATE CLUSTER.
4. Choose your GT Username as the cluster name (or you can use the default name)
5. Choose the closest region and location. For example, us-east4-a or us-east4-b or us-east4-c for students in east coast
6. Choose Cluster type as 'Standard'(1 master, N workers)
7. Leave the autoscaling policy as None.

Google Cloud Platform CSE6242 Search products and resources

Dataproc Create a cluster

Clusters

- Set up cluster** (Begin by providing basic information.)
- Configure nodes** (optional) (Change node compute and storage capabilities.)
- Customize cluster** (optional) (Add cluster properties, features, and actions.)
- Manage security** (optional) (Change access, encryption, and security settings.)

CREATE **CANCEL**

Equivalent [REST](#) or [command line](#)

Name

Cluster Name *
gburdell3

Location

Region *
us-east4

Zone *
us-east4-c

Cluster type

☒ **Standard** (1 master, N workers)

☐ **Single Node** (1 master, 0 workers)
Provides one node that acts as both master and worker. Good for proof-of-concept or small-scale processing.

☐ **High Availability** (3 masters, N workers)
Hadoop High Availability mode provides uninterrupted YARN and HDFS operations despite single-node failures or reboots.

Autoscaling

Automates cluster resource management based on an autoscaling policy.

Policy
None

Versioning

Use a custom image to load pre-installed packages. [Learn more](#)

Image Type and Version
1.3-debian10

Release Date
First released on 8/16/2018.

CHANGE

Release Notes

- Check the default Image version under Image type and version, if your default version is 2.0-debian 10, click change and select version 1.5-debian 10.

Dataproc Create a cluster

Clusters

- Set up cluster** (Begin by providing basic information.)
- Configure nodes** (optional) (Change node compute and storage capabilities.)
- Customize cluster** (optional) (Add cluster properties, features, and actions.)
- Manage security** (optional) (Change access, encryption, and security settings.)

CREATE **CANCEL**

Equivalent [REST](#) or [command line](#)

Autoscaling

Automates cluster resource management based on an autoscaling policy.

Policy
None

Versioning

Use a custom image to load pre-installed packages. [Learn more](#)

Image Type and Version
1.5-debian10

Release Date
First released on 3/25/2020.

CHANGE

- Check the Component gateway checkbox (Enable access to the web interfaces of default and selected optional components on the cluster.)

10. Under “Optional components”, click on “Select Component” button and select the "Anaconda" and "Jupyter Notebook" components













Components

Component Gateway

- ☒ Enable component gateway
Provides access to the web interfaces of default and selected optional components on the cluster. [Learn more](#)

Optional components

Select one or multiple components. [Learn more](#)

- ☒ Anaconda 
- ☐ Hive WebHCat 
- ☒ Jupyter Notebook 
- ☐ Zeppelin Notebook 
- ☐ Druid 
- ☐ Presto 
- ☐ ZooKeeper 
- ☐ Ranger 
- ☐ HBase 
- ☐ Flink 
- ☐ Docker 
- ☐ Solr 

11. You can use the provided defaults for the other options.
12. Under ‘Customize cluster’, use the “Cloud Storage staging bucket” field to select your bucket- Browse the name of the bucket you created in prior steps (only specify the name of the bucket which would be your GT Username). Your notebooks will be stored in Cloud Storage under gs://bucket-name/notebooks/jupyter

Cloud Storage staging bucket

Storage staging bucket BROWSE

Cloud Storage staging bucket to be used for storing cluster job dependencies, job driver output, and cluster config files.

13. Click Create

It will take a few minutes for your Cluster to be up and running. Once the cluster is up and running:

1. Click on your Cluster Name to navigate into the cluster details screen
2. Click the Web Interfaces tab to display a list of Component Gateway links to the web interfaces of default and optional components installed on the cluster
3. Click the Jupyter link. The Jupyter notebook web UI opens in your local browser.
4. Upload HW3 Q4 skeleton notebook into your Jupyter notebook web UI (under GCS folder and not under local folder)
5. Open the notebook, set the kernel to PySpark and you will be ready to start working on the Q4 section.

Delete Storage and Clusters

After you complete the Q4 section of this homework, please remember to delete both storage and clusters. The deletion process is easy.

NOTE: Ensure to download all the notebooks from GCP cluster before deleting the GCP cluster (otherwise the work will be lost).

1. On the Storage home page, check the bucket you want to delete and then click “DELETE.”
2. Wait till the bucket is deleted without any errors.
3. On the Cluster page, check the cluster you want to delete and then click “DELETE.”
4. Wait till the cluster is deleted without any errors.