

## Important

This is not an instruction how to set up the Gipter!!! It is a description of UI. Instruction can be found on the [github](#).

## Requirements

You need Java 8 installed on your computer. You can download it [here](#).

## Launching in UI mode

UI mode is set as default. Just double click on the Gipter.jar and that's it. If you have any problems then use the right click option and pick 'Open with' then choose 'Java(TM) Platform SE binary'.

## Launching in command line (CLI) mode

Open PowerShell, go to Gipter home and use this command:

```
java -jar Gipter.jar useUI=N
```

or create a file with extension \*.cmd and copy paste the above instruction to it. Place the file in the Gipter home directory and double-click it. You will launch the command window in which Gipter will be executed.

## Description of main window

All parameters are described [here](#).

**Gipter v3.6**

Settings Help

**Toolkit**

Username: PAWG

Password: ●●●

Domain: NCDMZ

Check your items in Toolkit

**Configuration**

Name: a

Add config

Save current configuration

a

Remove config

**Paths details**

File name prefix:

Use prefix as file name: ☐

Project paths: Change C:\Workspace\GitDiffGenerator

Item path: Change C:\Workspace\GitDiffGenerator

**CSV details**

Authors: PreCyz

Committer email:

Git author:

Mercurial author:

SVN author:

Upload type: SIMPLE

List names: Deliverables

Delete downloaded files: ☒

Skip remote: ☒

**Time frame**

Start date: 2019-07-22

End date: 2019-07-29

Period in days: 7


Execute All-in

Job Exit


This is the reflection of all parameters that are defined in Gipter application. You should know how to set them. What's important here is toolkit credentials. Use NCDMZ credentials.

Menu

On main window you have the access to settings. There are two different type of settings:




**Settings → Application** displays window where you can change the behaviour of the application:

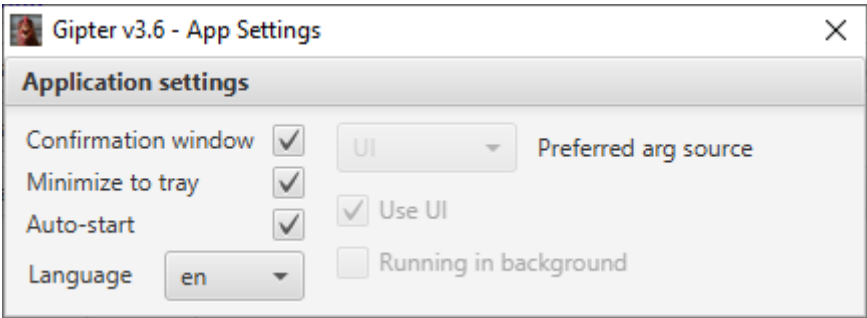


You can manipulate these settings as you want.

**Settings → Toolkit** displays window with toolkit settings. At this window you can not set anything. What you can do here is you can go to your copyright items in toolkit. To do so just press blue link.

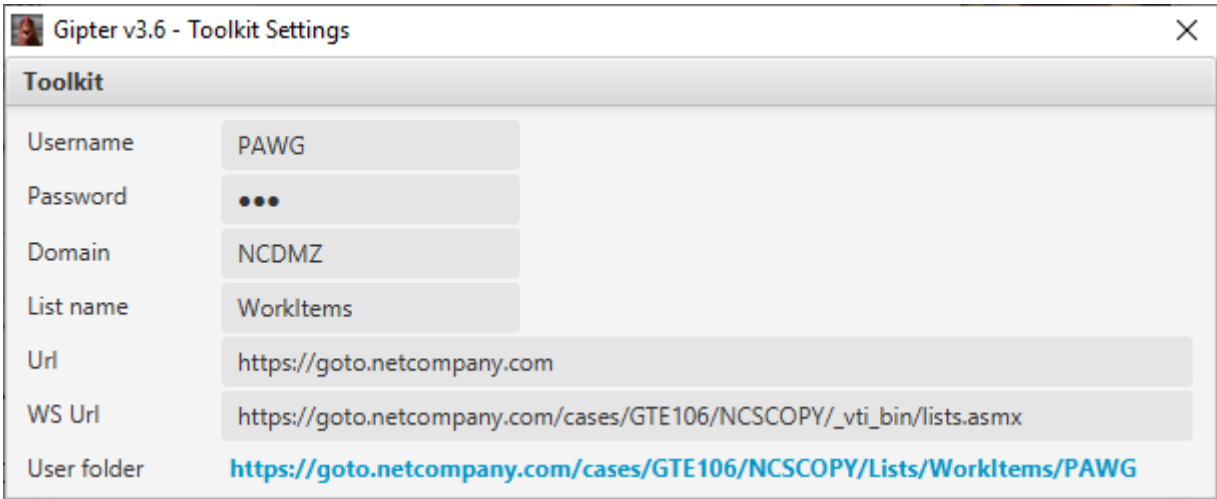

The second menu item is '**Help**'. I can imagine that you may have some problems with the application so here you have the place where you can find your answers.

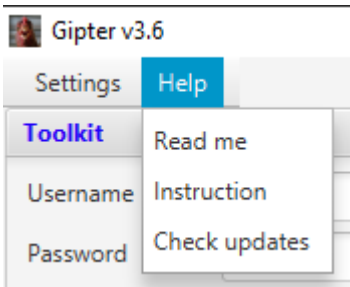

**Read me** – takes you to the page on github, where you can find description of all parameters.

**Instruction** – opens this document, if it is located in Gipter home directory.

**Check updates** – checks if there is newer version of the application available.

### Buttons on main window

Now here is a short description of buttons:


**Add config** – adds new configuration. You are allowed to add as many configurations as you want. To use that button you need to set configuration name first.



**Save current configuration** – saving or overriding current settings under the given configuration name.

**Execute** – executes diff generation and upload to toolkit for chosen configuration name.

**All-in** – executes diff generation for all configurations.

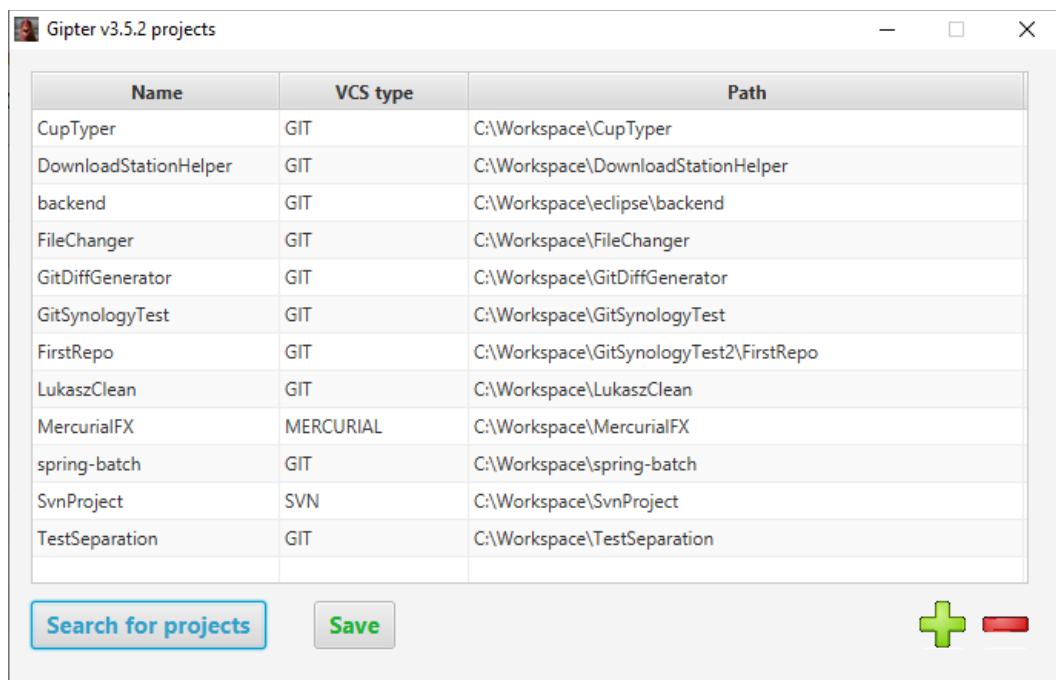**Change** – for '*Project paths*' allows you to pick up all projects, that you want to combine and use as copyright item. You can either replace previously chosen or add a new one. To do so Gipter will open new window to manage the projects:



Interface is simple. If you want to add new project then  press , if you want to remove then select project(s) and  press . If you want to Gipter find all your repositories because manual adding is too boring then use '**Search for projects**' button and select parent folder with you projects. You can use this feature multiple times. It will add new projects to existing. To save changes you made just press button '**Save**'.

If you set upload type as TOOLKIT\_DOCS then different window with projects will be displayed. And why would you do that? Because Gipter produces diff from the documents that you created. So for the documents you need to specify different kind of projects. To be more specific you need to add Toolkit projects. Under these projects your documentation is kept. But don't you worry. If you set toolkit credentails at the main window of application, then Gipter will download your project automatically for you and display it in the table. You can always check if Gipter downloaded proper projects, by filling in two fields in the link '**Check**' and press that link. It should redirect you to toolkit. There is another link there 'Show my project' that will redirect you to the page with all projects that are available for you. That window contains also the description what to do :)

The way to add and remove projects from the table is exactly the same as with the regular projects.

Gipter v3.6 - Toolkit Projects

Here you have to enter the id and then name of the project, where you created documentation. Easy now! Do not pass out! If you do not what am I asking of you, then below you have an example of the link. In that link, GTE106 is the id and NCSCOPY is the name of the project. If you do not know where to find it, then click the link 'Show my projects' and check it out what projects were displayed in section 'Mine toolkit'.  
Example address: https://goto.netcompany.com/cases/GTE106/NCSCOPY/default.aspx  
[Show my projects](#)  
https://goto.netcompany.com/cases/ /  /default.aspx [Check](#)

Name	VCS type	Path
NO_PROJECT_PATH_GIVEN	N/A	NO_PROJECT_PATH_GIVEN

Save

[Show my projects](#)[illegible]


Save

**Change** – for ‘*Item path*’ allows you to choose where to store your copyright items.

You can also change the language to Polish.

## Tray description

When you look at the tray you will see a new icon there like below:

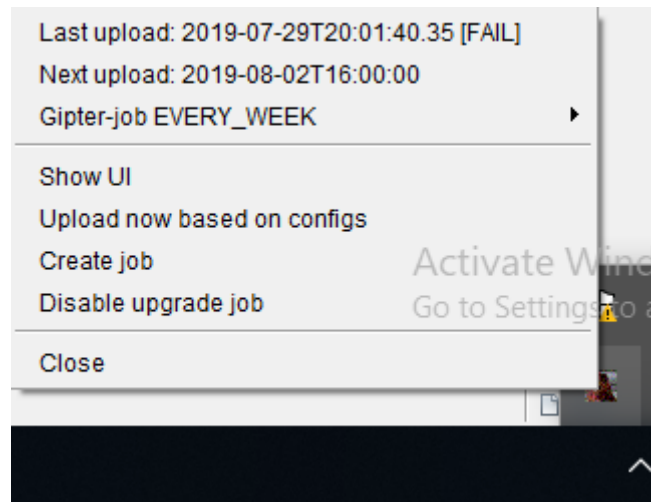

Yes, yes! It's a chicken 🐔 When you right-click that chicken then you will see the menu. Below is a short description of all available options.

If the program have been executed at least once, then **Last upload ...** - shows when was the last upload of item and status of it (success or fail).

Below options are visible all the time.

**Show UI** – brings back the main window with application parameters.

**Upload now based on configs** – uploads copyright items for all configurations. This actions is equal to **All-in** button from the main view.

**Disable upgrade job** – switching off the job responsible for checking if the new version of application has been released. When this functionality is disabled, it can be enabled from the same place.

**Close** – terminates the program.

When you create a job, then **Next upload ...** - shows when will be next execution of the job, which means when next upload will be triggered.

**Create job** – launches the window where you can setup the gipter-job and schedule it. Below is a screenshot with that window:

A screenshot of a window titled 'Gipter v3.6 job'. The window has a light gray background and a title bar with standard Windows window controls. It is divided into two main sections: 'Clicking way' on the left and 'Cron way' on the right. The 'Clicking way' section has fields for 'Exact time' (7:0), 'Day of month' (1), 'Day of week' (FRIDAY), 'Start date' (2019-07-29), and 'Configs' (all-configs). There are also radio buttons for scheduling: 'Every month', 'Every 2 weeks', and 'Every week' (which is selected). The 'Cron way' section has a 'Cron expresion' field. Below these sections is a 'Defined job' section with a table showing job details. At the bottom of the window, there is a status bar with 'Last upload: 2019-07-29T20:01:40.35 [FAIL]' and 'Next upload: 2019-08-02T16:00:00', and two buttons: 'Schedule' and 'Cancel job'.

You can define gipter-job both ways: by clicking in predefined values or specifying CRON expression. CRON expression is well known but if you want to know more read [this](#). If you need with building the CRON expression go [here](#).

If job was defined in the past, its details will be displayed in 'Defined job' section. Remember that when you define job you need to choose the configurations that will be used in that job. By default all configurations are chosen. There are two ways of deletion an existing job. One is simple cancelling by pressing button 'Cancle job'. Job will be forgotten. The second is defining new job by pressing 'Schedule'. The old one will be replaced by the new one.

If you choose to the clicking way to define the job then:

**Configs** – configuration to choose.

**Exact time** – is an hour of the day when the job must be executed.


**Day of the month** – the exact day of the month to execute the job.

**Day of week** – the day of the week when to execute the job.

**Start date** – when to schedule the job. At this date above job definition will start to be valid.

Radio buttons are self-explanatory (I think).

**Schedule** – will create gipter-job and put it into quartz scheduler. Once the job is created you will the difference in the tray:

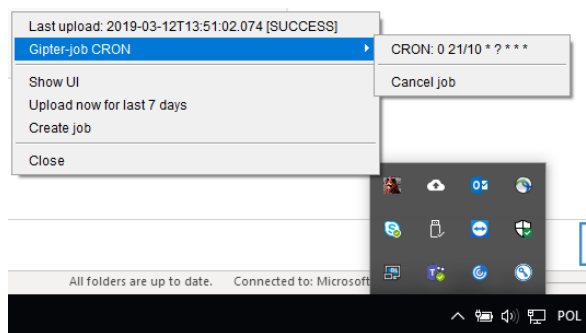

In tray area now you will see the menu with gipter-job type and details. Also, you can **Cancel job** that job. If you do that this section will disappear from the tray.

You might notice that there is one additional entry on the very top of the tray. This is the info when the last upload was executed end if it was success or failure.

The important thing here is that this job will work only **when Gipter is working**. If you close the application, then the job will be killed. Furthermore if you run application again, then Gipter will reschedule killed job, so it could run again.

That's it! Enjoy (I hope)!