0,4	1,4	2,4	3,4	4,4
0,3	1,3	2,3	3,3	4,3
0,2	1,2	2,2	3,2	4,2
0,1	1,1	2,1	3,1	4,1
0,0	1,0	2,0	3,0	4,0

Start

landing Spot = destination values + player values

destination x/z

↓

Set to 0 every time we do a new move input

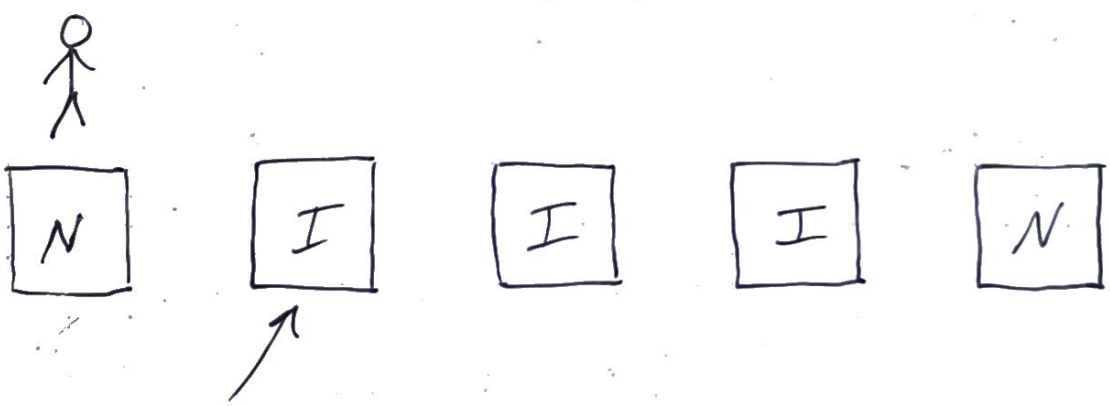

First thing we do is check the tile type of this first tile.

Because it's ice, we're going to call TryToMovePlayer() again to conduct that recursive ice logic.

destinationX = 0
destinationZ = 0] Before TryToMovePlayer()

Let's say we want to move right, the direction would be (1, 0).

destinationX += xDir] 1
destinationZ += zDir] 0 within TryToMovePlayer()

//... other stuff happens

We find out we have an ice tile, so we need to somehow recursively make our way back to TryToMovePlayer()... but then what is being passed into it again?

destination x is still 1,
destination z is still 0.] These are NOT passed into IceTile() as parameters

If we were to call TryToMovePlayer(), we would be updating the destination values yet again.

Also, IceTile() and NormalTile are both being called with the attemptedDestX & attemptedDestZ parameters, not the destinationX/Z variables.

We really just need to handle the xDir and zDir variables we pass into TryToMovePlayer() from within IceTile().