

# FLYAWAY (AN AIRLINE BOOKING PORTAL) SCREENSHOTS

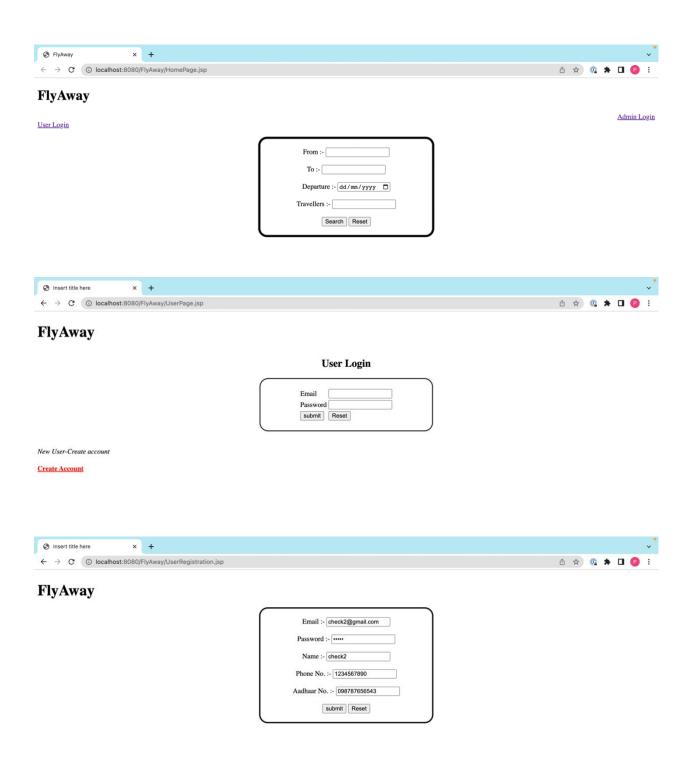

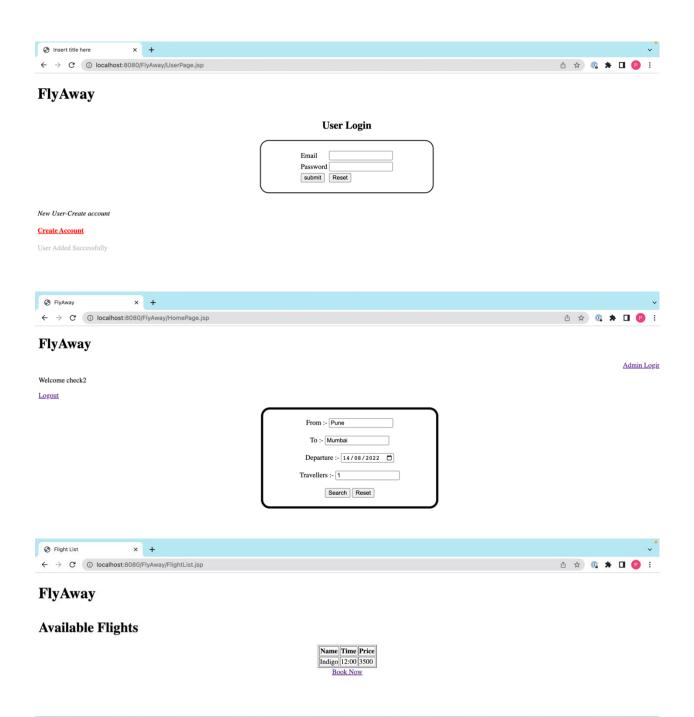

## Welcome to FlyAway

 $\leftarrow$   $\rightarrow$   $\mathbf{C}$   $\bigcirc$  localhost:8080/FlyAway/BookFlight.jsp

Proceed to Pay

S FlyAway





### Welcome to FlyAway

## Booking done successfully..Happy Journey!!

## Thank you check2 for booking with FlyAway!


## Your AirTicket






### One step away from flying away !!



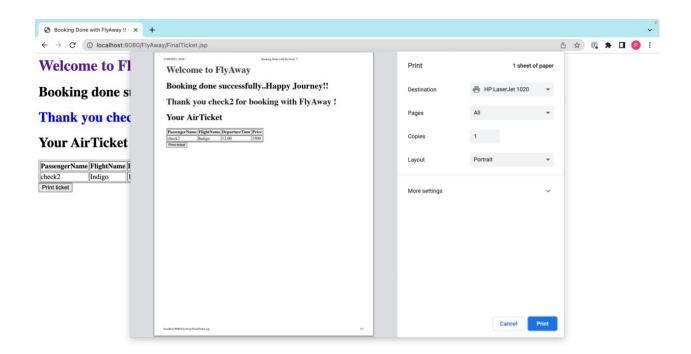

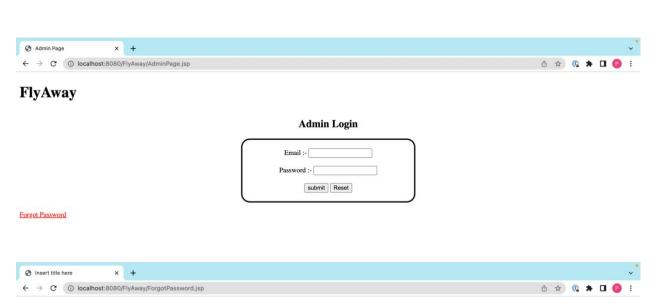

## **FlyAway**





## **FlyAway**

## **Insert New Flight Details**



## FlightList



[prem@Prems-MacBook-Pro ~ % /usr/local/mysql/bin/mysql -u root -p;
[Enter password:
Welcome to the MySQL manitor Commands and with tor \g

Welcome to the MySQL monitor. Commands end with ; or  $\gray{g}$ .

Your MySQL connection id is 75

Server version: 8.0.30 MySQL Community Server - GPL

Copyright (c) 2000, 2022, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

[mysql> use flyaway;

Reading table information for completion of table and column names You can turn off this feature to get a quicker startup with -A

# Database changed [mysql> show tables;

1	Tables_in_flyaway
+-	
1	admin
l	flights
1	user

3 rows in set (0.00 sec)

[mysql> select \* from admin;

1	email	password	
1	admin@gmail.com	admin123	1

1 row in set (0.00 sec)

#### [mysql> select \* from flights;

name	fromf	tof	datef	timef	price
Decon Airlines	CBE	Pune	2022-08-12	18:00	5000
Air Asia	Chennai	Salem	2022-08-14	12:00	6000
Indigo	Pune	Mumbai	2022-08-14	12:00	3500

3 rows in set (0.00 sec)

#### [mysql> select \* from user;

email	password	name	phno	adno
try1@gmail.com	12345	try1	1234567890	123456789012
check1@gmail.com	1 12345	   Check1	   0987654321	098787656543
check2@gmail.com	12345	check2	1234567890	098787656543

4 rows in set (0.00 sec)

mysql>