


Daily SQL Practice

(18-03-2026)

- **SQL**

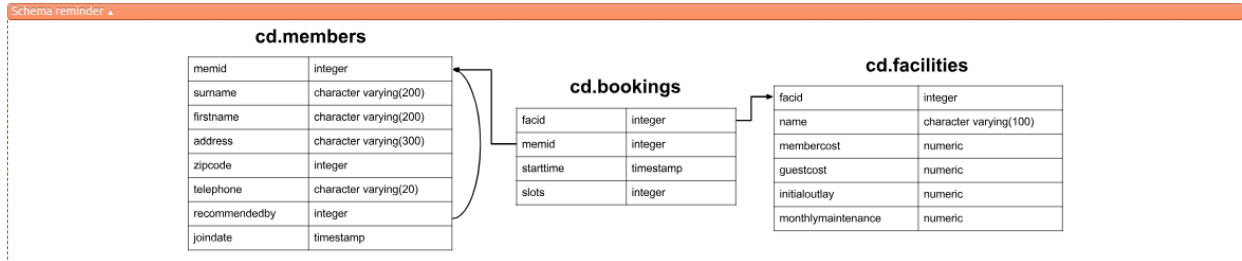

1. We want to alter the price of the second tennis court so that it costs 10% more than the first one. Try to do this without using constant values for the prices, so that we can reuse the statement if we want to.

Solution :

```
update cd.facilities
set
    membercost = 1.1 * (SELECT membercost from
                        cd.facilities where name='Tennis Court 1'),
    guestcost = 1.1 * (SELECT guestcost from
                      cd.facilities where name='Tennis Court 1')
where name = 'Tennis Court 2';
```

2. In our previous exercises, we deleted a specific member who had never made a booking. How can we make that more general, to delete all members who have never made a booking?

Solution :

```
delete from cd.members
where memid not in (select memid from cd.bookings)
```

3. Produce a count of the number of facilities that have a cost to guests of 10 or more.

Solution :

```
SELECT COUNT(*)
FROM cd.facilities
WHERE guestcost > 10;
```

- **MongoDB**

1. Write a MongoDB query to find the restaurant Id, name, borough and cuisine for those restaurants which contain 'ces' as last three letters for its name.

Solution:

```
db.mycollection.aggregate[
{$project:{restaurant_id: 1,name: 1,borough: 1,cuisine: 1}},
{ $match:{name: /ces$/}}]
```

2. Write a MongoDB query to find the restaurant Id, name, borough and cuisine for those restaurants which contain 'Reg' as three letters somewhere in its name.

Solution:

```
db.mycollection.aggregate[
  {$project:{restaurant_id: 1,name: 1,borough: 1,cuisine: 1}},
  { $match:{name: /Reg/}}]
```

3. Write a MongoDB query to find the restaurants which belong to the borough Bronx and prepared either American or Chinese dish.

Solution:

```
db.mycollection.find({$and:[{"borough":"Bronx"},{$or:
[{"cuisine":"American"}, {"cuisine":"Chinese"}]}}])
```