



- 1) Created reactive webflux application with reactive mongodb connectivity.
- 2) Controller search through path variables and request parameters and all customers if null.

If no parameter is passed:

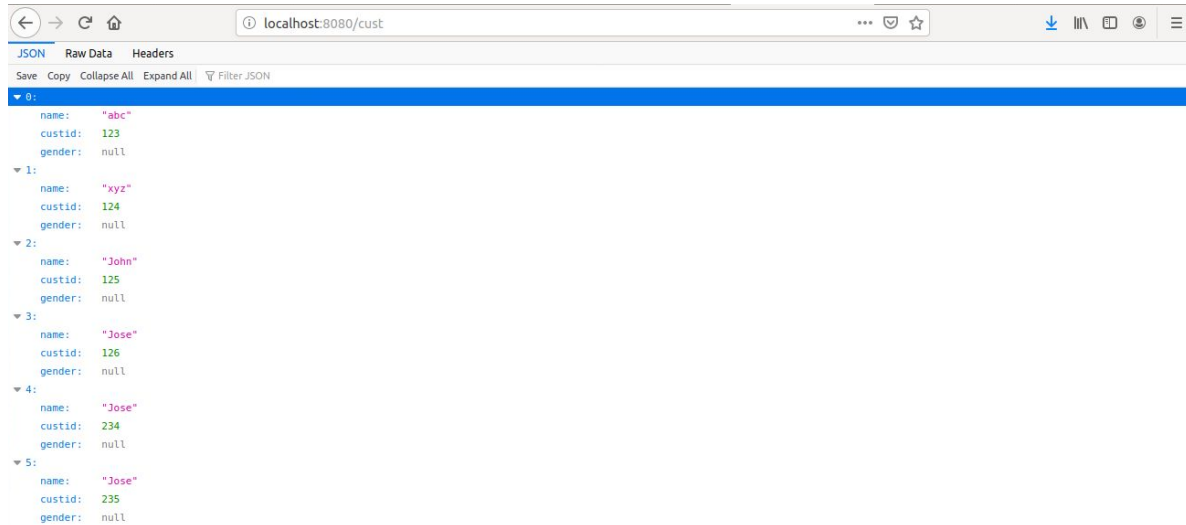

If id is passed:

Return as Mono<Customer> as id should be unique, if exists.

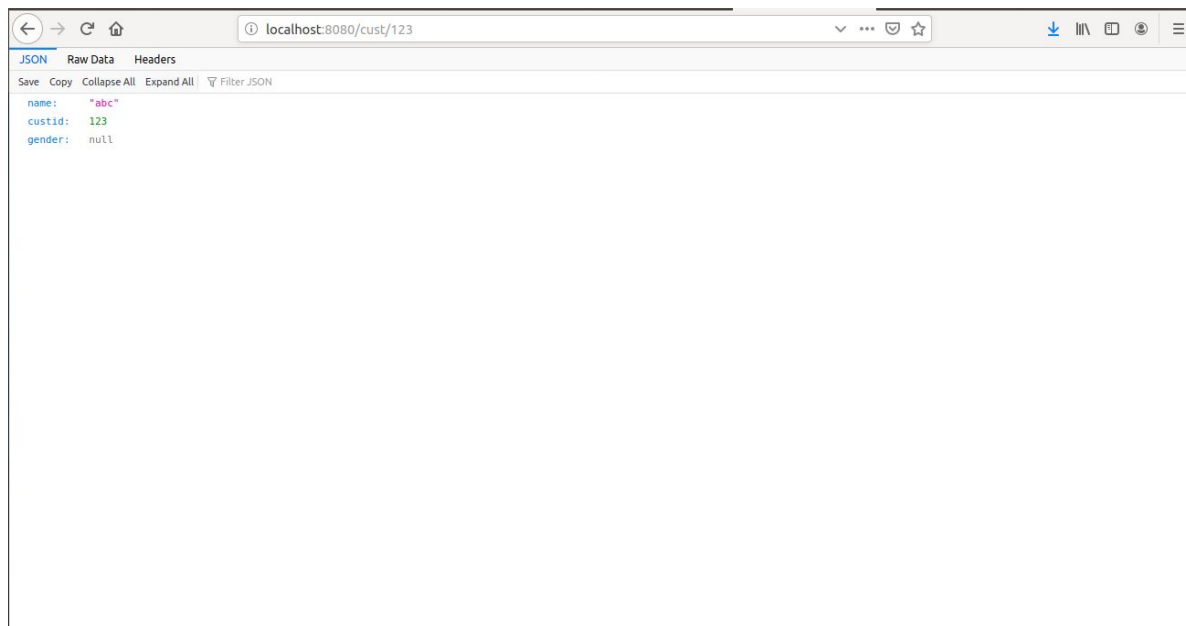

If name is passed then, Flux<Customer> with same name.

←

→

↺

🏠

localhost:8080/cust?name=Jose

⌵

⋮

🔒

☆

⬇

🔍

📄

🕒

☰

JSONRaw DataHeaders

SaveCopyCollapse AllExpand All🔍 Filter JSON

▼ 0:

name:

"Jose"

custid:

126

gender:

null

▼ 1:

name:

"Jose"

custid:

234

gender:

null

▼ 2:

name:

"Jose"

custid:

235

gender:

null