

**Performance**

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)



▲ 0–49 50–89 90–100

METRICS[Expand view](#)

First Contentful Paint

1.8 s

Largest Contentful Paint

3.0 s


Total Blocking Time

410 ms

Cumulative Layout Shift

0.008

Speed Index

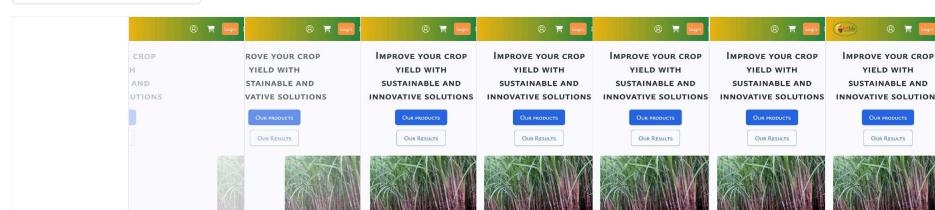2.2 s[View Treemap](#)Show audits relevant to: All [FCP](#) [LCP](#) [TBT](#) [CLS](#)**DIAGNOSTICS**

▲ Minimize main-thread work — 3.6 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work \(TBT\)](#)

Category	Time Spent
Other	2,158 ms
Script Evaluation	724 ms
Style & Layout	499 ms
Script Parsing & Compilation	116 ms
Rendering	111 ms

Category


Category	Time Spent
Parse HTML & CSS	28 ms

▲ Preload Largest Contentful Paint image — Potential savings of 140 ms

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) [\[LCP\]](#)

URL

onrender.com [\[1st Party\]](#)



...
media/front1.0ef88f3...jpg (pridefrontend.onrender.com)

img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...

▲ Largest Contentful Paint element — 3,000 ms

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#) [\[LCP\]](#)

Element



img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform...

Phase	% of LCP	Timing
TTFB	25%	760 ms
Load Delay	37%	1,120 ms
Load Time	16%	470 ms
Render Delay	22%	660 ms

▲ Eliminate render-blocking resources — Potential savings of 830 ms

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources.](#) [\[FCP\]](#) [\[LCP\]](#)

URL	Transfer Size	Potential Savings
Google Fonts [Cdn]	1.7 KiB	890 ms
/css2?family=... (fonts.googleapis.com)	1.7 KiB	890 ms


▲ Serve images in next-gen formats — Potential savings of 2,514 KiB

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats.](#) [\[FCP\]](#) [\[LCP\]](#)

Show 3rd-party resources (3)

URL

onrender.com [1st Party]



img.object-cover.w-full.h-full

...


media/Wheat.c633468...png (pridefrontend.onrender.com)



img.w-32.mb-4

...

media/logo.605e081...png (pridefrontend.onrender.com)



img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover,transition-transform.duration-300.group-hov...



img.object-cover.w-full.h-full

...

media/Apple.6872461...png (pridefrontend.onrender.com)



img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover,transition-transform.duration-300.group-hov...



img.object-cover.w-full.h-full

...

media/Banana.c74c0ed...png (pridefrontend.onrender.com)




img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover,transition-transform.duration-300.group-hov...



img.object-cover.w-full.h-full

...

media/Grapes.7026601...png (pridefrontend.onrender.com)




img.object-cover.w-full.h-full

...

media/Pomegranate.1f419c5...png (pridefrontend.onrender.com)


Cloudinary [Content]



img.w-[80%].h-48.object-cover.rounded-lg

...

v173.../s5qdbjncsvpctbfhduzn.jpg (res.cloudinary.com)



img.w-[80%].h-48.object-cover.rounded-lg

...

v173.../hfnnqkjrygzendhrhsqc.jpg (res.cloudinary.com)

URL



...
v173.../nahrgxv7mwltdxpvn7p.jpg (res.cloudinary.com)

▲ Reduce unused JavaScript — Potential savings of 86 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) [FCP] [LCP]

URL	Transfer Size	Potential Savings
onrender.com 1st Party	125.7 KiB	64.8 KiB
...js/main.c1e22a28.js (pridefrontend.onrender.com)	125.7 KiB	64.8 KiB
Unattributable	28.2 KiB	21.4 KiB
chrome-extension://apldhonppojnaadpeoghllcjealkmem/jquery.js	28.2 KiB	21.4 KiB

Image elements do not have explicit `width` and `height`




Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions.](#) [CLS]

URL	
onrender.com 1st Party	
	img.w-20 ...media/logo.605e081....png (pridefrontend.onrender.com)
	img.w-32.mb-4 ...media/logo.605e081....png (pridefrontend.onrender.com)

Serve static assets with an efficient cache policy — 6 resources found

A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)

URL	Cache TTL	Transfer Size
Cloudinary Content		1,999 KiB
...v173.../nahrgxv7mwltdxpvn7p.jpg (res.cloudinary.com)	30d	360 KiB
...v173.../s5qdbjncsvpctbfhduzn.jpg (res.cloudinary.com)	30d	356 KiB
...v173.../hfnnqkjrygzendhrhsqc.jpg (res.cloudinary.com)	30d	356 KiB
...v173.../qppgeikuny0effy7duoy.jpg (res.cloudinary.com)	30d	336 KiB

URL	Cache TTL	Transfer Size
...v173.../o09bgwtveooqjmkjulxf.jpg (res.cloudinary.com)	30d	318 KiB
...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)	30d	273 KiB
Properly size images — Potential savings of 4,702 KiB		
Serve images that are appropriately-sized to save cellular data and improve load time. Learn how to size images. [FCP] [LCP]		
<input checked="" type="checkbox"/> Show 3rd-party resources (6)		
URL		
onrender.com 1st Party		
	img.object-cover.w-full.h-full	... media/Wheat.c633468....png (pridefrontend.onrender.com)
	img.w-32.mb-4	... media/logo.605e081....png (pridefrontend.onrender.com)
	img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...	... media/front2.c3924e8....jpg (pridefrontend.onrender.com)
	img.object-cover.w-full.h-full	... media/Apple.6872461....png (pridefrontend.onrender.com)
	img.w-full.h-full.aspect-square.object-cover.border.border-gray-300	... media/Sugarcane.1faf6b....png (pridefrontend.onrender.com)
	img.object-cover.w-full.h-full	... media/Pomegranate.1f419c5....png (pridefrontend.onrender.com)
	img.object-cover.w-full.h-full	... media/Grapes.7026601....png (pridefrontend.onrender.com)
	img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...	... media/front3.1994ff3....jpg (pridefrontend.onrender.com)
	img.object-cover.w-full.h-full	... media/Carrot.481744e....png (pridefrontend.onrender.com)

URL

img.object-cover.w-full.h-full

... media/Mango.4ed48d2...png (pridefrontend.onrender.com)

img.object-cover.w-full.h-full

... media/Soybean.c61cf3e...png (pridefrontend.onrender.com)




img.object-cover.w-full.h-full

... media/Potato.ba6795f...png (pridefrontend.onrender.com)

img.object-cover.w-full.h-full


... media/Rice.28805db...png (pridefrontend.onrender.com)

Cloudinary Content




img.w-[80%].h-48.object-cover.rounded-lg

... v173.../nahrgxv7mwIntdxpvn7p.jpg (res.cloudinary.com)




img.w-[80%].h-48.object-cover.rounded-lg

... v173.../s5qdbjncsvpctbfhduzn.jpg (res.cloudinary.com)




img.w-[80%].h-48.object-cover.rounded-lg

... v173.../hfnnqkjrygzendhrhsqc.jpg (res.cloudinary.com)



img.w-[80%].h-48.object-cover.rounded-lg

... v173.../qppgeikuny0effy7duoy.jpg (res.cloudinary.com)



img.w-[80%].h-48.object-cover.rounded-lg

... v173.../o09bgwtveooqjmklxf.jpg (res.cloudinary.com)



img.w-[80%].h-48.object-cover.rounded-lg


... v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)

Defer offscreen images — Potential savings of 272 KiB

^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#) (FCP) (LCP)

URL	Resource Size	Potential Savings
Cloudinary Content	272.0 KiB	272.0 KiB

URL	Resource Size	Potential Savings
 ... v173...lse75aci4w21zj1pu66v.jpg (res.clo udinary.com)	272.0 KiB	272.0 KiB
img.w-[80%].h-48.object-cover.rounded-lg		
Efficiently encode images — Potential savings of 119 KiB		
Optimized images load faster and consume less cellular data. Learn how to efficiently encode images. FCP LCP		
URL	Resource Size	Potential Savings
onrender.com 1st Party		
 ... media/front2.c3924e8...jpg (pridefrontend. onrender.com)		
img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...		
 ... media/front3.1994ff3...jpg (pridefrontend.o nrender.com)		
img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...		
Avoid enormous network payloads — Total size was 5,327 KiB		
Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes.		
<input checked="" type="checkbox"/> Show 3rd-party resources (6)		
URL	Transfer Size	
onrender.com 1st Party	2,564.9 KiB	
...media/Wheat.c633468....png (pridefrontend.onrender.com)	1,190.1 KiB	
...media/logo.605e081....png (pridefrontend.onrender.com)	849.9 KiB	
...media/front2.c3924e8....jpg (pridefrontend.onrender.com)	326.1 KiB	
...media/Sugarcane.1faf6b....png (pridefrontend.onrender.com)	198.8 KiB	
Cloudinary Content	1,999.0 KiB	
...v173...nahrgxv7mwIhtdxpvn7p.jpg (res.cloudinary.com)	360.3 KiB	
...v173.../s5qdbjncsvpctbfhduzn.jpg (res.cloudinary.com)	355.7 KiB	
...v173.../hfnnqkjrygzendrhsqc.jpg (res.cloudinary.com)	355.5 KiB	
...v173.../qppgeikuny0effy7duoy.jpg (res.cloudinary.com)	336.5 KiB	
...v173.../o09bgwtveooqjmkjulf.jpg (res.cloudinary.com)	318.4 KiB	

URL	Transfer Size																												
...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)	272.6 KiB																												
○ JavaScript execution time — 0.8 s																													
Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. [TBT]																													
<table border="1"> <thead> <tr> <th>URL</th><th>Total CPU Time</th><th>Script Evaluation</th><th>Script Parse</th></tr> </thead> <tbody> <tr> <td>Unattributable</td><td>1,937 ms</td><td>105 ms</td><td>55 ms</td></tr> <tr> <td>Unattributable</td><td>1,781 ms</td><td>12 ms</td><td>0 ms</td></tr> <tr> <td>chrome-extension://aplhdhonppojnaadpeogh1lcjealkmem/jquery.js</td><td>156 ms</td><td>94 ms</td><td>55 ms</td></tr> <tr> <td>onrender.com [1st Party]</td><td>1,661 ms</td><td>602 ms</td><td>56 ms</td></tr> <tr> <td>https://pridefrontend.onrender.com</td><td>958 ms</td><td>36 ms</td><td>1 ms</td></tr> <tr> <td>...js/main.c1e22a28.js (pridefrontend.onrender.com)</td><td>703 ms</td><td>565 ms</td><td>55 ms</td></tr> </tbody> </table>		URL	Total CPU Time	Script Evaluation	Script Parse	Unattributable	1,937 ms	105 ms	55 ms	Unattributable	1,781 ms	12 ms	0 ms	chrome-extension://aplhdhonppojnaadpeogh1lcjealkmem/jquery.js	156 ms	94 ms	55 ms	onrender.com [1st Party]	1,661 ms	602 ms	56 ms	https://pridefrontend.onrender.com	958 ms	36 ms	1 ms	...js/main.c1e22a28.js (pridefrontend.onrender.com)	703 ms	565 ms	55 ms
URL	Total CPU Time	Script Evaluation	Script Parse																										
Unattributable	1,937 ms	105 ms	55 ms																										
Unattributable	1,781 ms	12 ms	0 ms																										
chrome-extension://aplhdhonppojnaadpeogh1lcjealkmem/jquery.js	156 ms	94 ms	55 ms																										
onrender.com [1st Party]	1,661 ms	602 ms	56 ms																										
https://pridefrontend.onrender.com	958 ms	36 ms	1 ms																										
...js/main.c1e22a28.js (pridefrontend.onrender.com)	703 ms	565 ms	55 ms																										
○ Avoid long main-thread tasks — 6 long tasks found																													
Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. Learn how to avoid long main-thread tasks [TBT]																													
<table border="1"> <thead> <tr> <th>URL</th><th>Start Time</th><th>Duration</th></tr> </thead> <tbody> <tr> <td>onrender.com [1st Party]</td><td></td><td>883 ms</td></tr> <tr> <td>...js/main.c1e22a28.js (pridefrontend.onrender.com)</td><td>2,401 ms</td><td>271 ms</td></tr> <tr> <td>...js/main.c1e22a28.js (pridefrontend.onrender.com)</td><td>2,672 ms</td><td>228 ms</td></tr> <tr> <td>https://pridefrontend.onrender.com</td><td>1,106 ms</td><td>182 ms</td></tr> <tr> <td>https://pridefrontend.onrender.com</td><td>906 ms</td><td>145 ms</td></tr> <tr> <td>...js/main.c1e22a28.js (pridefrontend.onrender.com)</td><td>2,945 ms</td><td>57 ms</td></tr> <tr> <td>Unattributable</td><td></td><td>169 ms</td></tr> <tr> <td>chrome-extension://aplhdhonppojnaadpeogh1lcjealkmem/jquery.js</td><td>1,288 ms</td><td>169 ms</td></tr> </tbody> </table>		URL	Start Time	Duration	onrender.com [1st Party]		883 ms	...js/main.c1e22a28.js (pridefrontend.onrender.com)	2,401 ms	271 ms	...js/main.c1e22a28.js (pridefrontend.onrender.com)	2,672 ms	228 ms	https://pridefrontend.onrender.com	1,106 ms	182 ms	https://pridefrontend.onrender.com	906 ms	145 ms	...js/main.c1e22a28.js (pridefrontend.onrender.com)	2,945 ms	57 ms	Unattributable		169 ms	chrome-extension://aplhdhonppojnaadpeogh1lcjealkmem/jquery.js	1,288 ms	169 ms	
URL	Start Time	Duration																											
onrender.com [1st Party]		883 ms																											
...js/main.c1e22a28.js (pridefrontend.onrender.com)	2,401 ms	271 ms																											
...js/main.c1e22a28.js (pridefrontend.onrender.com)	2,672 ms	228 ms																											
https://pridefrontend.onrender.com	1,106 ms	182 ms																											
https://pridefrontend.onrender.com	906 ms	145 ms																											
...js/main.c1e22a28.js (pridefrontend.onrender.com)	2,945 ms	57 ms																											
Unattributable		169 ms																											
chrome-extension://aplhdhonppojnaadpeogh1lcjealkmem/jquery.js	1,288 ms	169 ms																											
○ Avoid large layout shifts — 1 layout shift found																													
These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to windowing . Learn how to improve CLS [CLS]																													
<table border="1"> <thead> <tr> <th>Element</th><th>Layout shift score</th></tr> </thead> <tbody> <tr> <td> section.relative.flex.flex-col.items-center.justify-between.bg-gray-50.p-6.md:p-12.lg:p-16.font-ysabeau...</td><td>0.008</td></tr> </tbody> </table>		Element	Layout shift score	 section.relative.flex.flex-col.items-center.justify-between.bg-gray-50.p-6.md:p-12.lg:p-16.font-ysabeau...	0.008																								
Element	Layout shift score																												
 section.relative.flex.flex-col.items-center.justify-between.bg-gray-50.p-6.md:p-12.lg:p-16.font-ysabeau...	0.008																												

Element

	img.object-cover.w-full.h-full	Media element lacking an explicit size
	img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...	Media element lacking an explicit size
	img.w-32.mb-4	Media element lacking an explicit size
	img.w-20	Media element lacking an explicit size
/css2?family=... (fonts.googleapis.com)		A late network request adjusted the page layout
...css/main.14cef6ca.css (pridefrontend.onrender.com)		A late network request adjusted the page layout

Initial server response time was short — Root document took 70 ms

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric.](#) [FCP](#) [LCP](#)

URL	Time Spent
onrender.com 1st Party	70 ms
https://pridefrontend.onrender.com	70 ms

Avoids an excessive DOM size — 254 elements

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) [TBT](#)

Statistic	Element	Value
Total DOM Elements		254
Maximum DOM Depth	a	12

Statistic	Element	Value
Maximum Child Elements		11
		div.flex.space-x-4.mx-auto.overflow-x-auto.w-[70%].scrollbarhide

○ Avoid chaining critical requests — 2 chains found ^

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests.](#)

Maximum critical path latency: **664.036 ms**

Initial Navigation

<https://pridefrontend.onrender.com>

- /css2?family=... (fonts.googleapis.com)
 - ...v2/Noa36Uro3....woff2 (fonts.gstatic.com) - **105.391 ms, 29.19 KiB**
 - ...css/main.14cef6ca.css (pridefrontend.onrender.com) - **68.128 ms, 8.85 KiB**

○ Minimize third-party usage — Third-party code blocked the main thread for 0 ms ^

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact.](#) [TBT]

Third-Party	Transfer Size	Main-Thread Blocking Time
Cloudinary [Content]	1,999 KiB	0 ms
...v173.../nahrgxv7mwltdxpvn7p.jpg (res.cloudinary.com)	360 KiB	0 ms
...v173.../s5qdbjncsvpcfbhduzn.jpg (res.cloudinary.com)	356 KiB	0 ms
...v173.../hfmnqkjrygzendhrhsqc.jpg (res.cloudinary.com)	356 KiB	0 ms
...v173.../ppgeikuny0effy7duoy.jpg (res.cloudinary.com)	336 KiB	0 ms
...v173.../o09bgwtveeoqjmjkulf.jpg (res.cloudinary.com)	318 KiB	0 ms
...v173.../lse75aci4w21z1pu66v.jpg (res.cloudinary.com)	273 KiB	0 ms
Google Fonts [Cdn]	31 KiB	0 ms
...v2/Noa36Uro3....woff2 (fonts.gstatic.com)	29 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	2 KiB	0 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (19)

Hide

Minify CSS ^

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) [FCP] [LCP]

Minify JavaScript ^

Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript.](#) [FCP] [LCP]

Reduce unused CSS ^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) [FCP] [LCP]

Enable text compression ^

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) [FCP](#) [LCP](#)

Preconnect to required origins [^](#)

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#) [LCP](#) [FCP](#)

Avoid multiple page redirects [^](#)

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#) [LCP](#) [FCP](#)

Use HTTP/2 [^](#)

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#) [LCP](#) [FCP](#)

Use video formats for animated content [^](#)

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats](#) [FCP](#) [LCP](#)

Remove duplicate modules in JavaScript bundles [^](#)

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. [FCP](#) [LCP](#)

Avoid serving legacy JavaScript to modern browsers [^](#)

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/homodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. [Learn how to use modern JavaScript](#) [FCP](#) [LCP](#)

User Timing marks and measures [^](#)

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

All text remains visible during webfont loads [^](#)

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display.](#)

Lazy load third-party resources with facades [^](#)

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) [TBT](#)

Largest Contentful Paint image was not lazily loaded [^](#)

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) [LCP](#)

Element

img.w-full.h-64.sm:h-80.md:h-96.rounded-lg.object-cover.transition-transform.duration-300.group-hov...

Uses passive listeners to improve scrolling performance ^

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners](#).

Avoids `document.write()` ^

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid `document.write\(\)`](#).

○ Avoid non-composited animations ^

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) [CLS]

Has a `<meta name="viewport">` tag with `width` or `initial-scale` ^

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).

Page didn't prevent back/forward cache restoration ^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

NAMES AND LABELS

▲ Buttons do not have an accessible name ^

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible](#).

Failing Elements
button.absolute.right-1.mr-2.md:hidden.text-white.focus:outline-none

▲ Links do not have a discernible name ^

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible](#).

Failing Elements



a.mt-2

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

CONTRAST

⚠ Background and foreground colors do not have a sufficient contrast ratio.

Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast.](#)

Failing Elements



a



button.px-2.bg-orange-400.rounded-md



h3.text-2xl.sm:text-3xl.md:text-4xl.font-bold.text-white



div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...



p.text-base.sm:text-lg.md:text-xl.text-white/80.mt-2




div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...



span.text-5xl.sm:text-6xl.md:text-7xl.font-bold.text-white



div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...



p.text-lg.sm:text-xl.md:text-2xl.text-white



div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...



h3.text-2xl.sm:text-3xl.md:text-4xl.font-bold.text-white

Failing Elements

div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
p.text-base.sm:text-lg.md:text-xl.text-white/80.ml-2
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
span.text-5xl.sm:text-6xl.md:text-7xl.font-bold.text-white
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
p.text-lg.sm:text-xl.md:text-2xl.text-white
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
h3.text-2xl.sm:text-3xl.md:text-4xl.font-bold.text-white
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
p.text-base.sm:text-lg.md:text-xl.text-white/80.mt-2
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
span.text-5xl.sm:text-6xl.md:text-7xl.font-bold.text-white
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...
p.text-lg.sm:text-xl.md:text-2xl.text-white
div.relative.w-full.aspect-square.flex.flex-col.items-start.justify-center.bg-[#d1ad0e].text-left.border.bor...

Failing Elements

These are opportunities to improve the legibility of your content.

BEST PRACTICES

⚠ Touch targets do not have sufficient size or spacing.

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. [Learn more about touch targets](#).

Failing Elements

button.px-2.bg-orange-400.rounded-md

a

a

button.px-2.bg-orange-400.rounded-md

These items highlight common accessibility best practices.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Hide

- ➊ Interactive controls are keyboard focusable

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable](#).
- ➋ Interactive elements indicate their purpose and state

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints](#).
- ➌ The page has a logical tab order

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering](#).
- ➍ Visual order on the page follows DOM order

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering](#).
- ➎ User focus is not accidentally trapped in a region

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps](#).
- ➏ The user's focus is directed to new content added to the page

If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.
<ul style="list-style-type: none"> ○ HTML5 landmark elements are used to improve navigation ^ <p>Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.</p>
<ul style="list-style-type: none"> ○ Offscreen content is hidden from assistive technology ^ <p>Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content.</p>
<ul style="list-style-type: none"> ○ Custom controls have associated labels ^ <p>Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels.</p>
<ul style="list-style-type: none"> ○ Custom controls have ARIA roles ^ <p>Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls.</p>

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (10)

Hide

[aria-hidden="true"] is not present on the document <body>
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body.
Image elements have [alt] attributes ^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.
[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5. ^
Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.
Document has a <title> element ^
The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.
<html> element has a [lang] attribute ^
If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. Learn more about the lang attribute.
<html> element has a valid value for its [lang] attribute ^
Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.
Lists contain only elements and script supporting elements (<script> and <template>). ^
Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. Learn more about proper list structure.

List items (<code></code>) are contained within <code></code> , <code></code> or <code><menu></code> parent elements	^
Screen readers require list items (<code></code>) to be contained within a parent <code></code> , <code></code> or <code><menu></code> to be announced properly. Learn more about proper list structure.	
Heading elements appear in a sequentially-descending order	^
Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.	

NOT APPLICABLE (43)	Hide
<input type="radio"/> <code>[accesskey]</code> values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.	
<input type="radio"/> <code>[aria-*]</code> attributes match their roles	^
Each ARIA role supports a specific subset of <code>aria-*</code> attributes. Mismatching these invalidates the <code>aria-*</code> attributes. Learn how to match ARIA attributes to their roles.	
<input type="radio"/> Uses ARIA roles only on compatible elements	^
Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles.	
<input type="radio"/> <code>button</code> , <code>link</code> , and <code>menuitem</code> elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to make command elements more accessible.	
<input type="radio"/> ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. Learn more about conditional ARIA attributes.	
<input type="radio"/> Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.	
<input type="radio"/> Elements with <code>role="dialog"</code> or <code>role="alertdialog"</code> have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
<input type="radio"/> <code>[aria-hidden="true"]</code> elements do not contain focusable descendants	^
Focusable descendants within an <code>[aria-hidden="true"]</code> element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn how aria-hidden affects focusable elements.	
<input type="radio"/> ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about input field labels.	

○ ARIA <code>meter</code> elements have accessible names
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name meter elements.
○ ARIA <code>progressbar</code> elements have accessible names
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to label progressbar elements.
○ Elements use only permitted ARIA attributes
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. Learn more about prohibited ARIA roles.
○ <code>[role]</code> s have all required <code>[aria-*]</code> attributes
Some ARIA roles have required attributes that describe the state of the element to screen readers. Learn more about roles and required attributes.
○ Elements with an ARIA <code>[role]</code> that require children to contain a specific <code>[role]</code> have all required children.
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. Learn more about roles and required children elements.
○ <code>[role]</code> s are contained by their required parent element
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. Learn more about ARIA roles and required parent element.
○ <code>[role]</code> values are valid
ARIA roles must have valid values in order to perform their intended accessibility functions. Learn more about valid ARIA roles.
○ Elements with the <code>role=text</code> attribute do not have focusable descendants.
Adding <code>role=text</code> around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendants will not be announced. Learn more about the role=text attribute.
○ ARIA toggle fields have accessible names
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about toggle fields.
○ ARIA <code>tooltip</code> elements have accessible names
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn how to name tooltip elements.
○ ARIA <code>treeitem</code> elements have accessible names
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more about labeling treeitem elements.
○ <code>[aria-*]</code> attributes have valid values
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. Learn more about valid values for ARIA attributes.
○ <code>[aria-*]</code> attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

- The page contains a heading, skip link, or landmark region

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#)

- `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements.

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#)

- Definition list items are wrapped in `<dl>` elements

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#)

- ARIA IDs are unique

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#)

- No form fields have multiple labels

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#)

- `<frame>` or `<iframe>` elements have a title

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#)

- `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute.

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

- Input buttons have discernible text.

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#)

- `<input type="image">` elements have `[alt]` text

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#)

- Form elements have associated labels

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

- Links are distinguishable without relying on color.

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable.](#)

- The document does not use `<meta http-equiv="refresh">`

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag.](#)

- `<object>` elements have alternate text

Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen readers convey meaning to users. [Learn more about alt text for object elements.](#)

○ Select elements have associated label elements. [^](#)

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#)

○ Skip links are focusable. [^](#)

Including a skip link can help users skip to the main content to save time. [Learn more about skip links.](#)

○ No element has a [tabindex] value greater than 0 [^](#)

A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. [Learn more about the tabindex attribute.](#)

○ Tables have different content in the summary attribute and <caption>. [^](#)

The summary attribute should describe the table structure, while <caption> should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption.](#)

○ Cells in a <table> element that use the [headers] attribute refer to table cells within the same table. [^](#)

Screen readers have features to make navigating tables easier. Ensuring <td> cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute.](#)

○ <th> elements and elements with [role="columnheader"/"rowheader"] have data cells they describe. [^](#)

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers.](#)

○ [lang] attributes have a valid value [^](#)

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute.](#)

○ <video> elements contain a <track> element with [kind="captions"] [^](#)

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions.](#)



Best Practices

TRUST AND SAFETY

▲ Does not use HTTPS — 6 insecure requests found [^](#)

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Insecure URL	Request Resolution
...v173...lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)	Automatically upgraded to HTTPS

Insecure URL	Request Resolution
...v173.../s5qdbjncsvpcfbhduzn.jpg (res.cloudinary.com)	Automatically upgraded to HTTPS
...v173.../hfnnqkjrygzendhrhsqc.jpg (res.cloudinary.com)	Automatically upgraded to HTTPS
...v173.../qppgeikuny0effy7duoy.jpg (res.cloudinary.com)	Automatically upgraded to HTTPS
...v173.../nahrgxv7mwIntdpvn7p.jpg (res.cloudinary.com)	Automatically upgraded to HTTPS
...v173.../o09bgwtveooqjmkulxf.jpg (res.cloudinary.com)	Automatically upgraded to HTTPS

Ensure CSP is effective against XSS attacks ^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

Ensure proper origin isolation with COOP ^

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#)

Description	Directive	Severity
No COOP header found		High

GENERAL

▲ Uses third-party cookies — 5 cookies found ^

Chrome is moving towards a new experience that allows users to choose to browse without third-party cookies. [Learn more about third-party cookies](#).

Name	URL
Cloudinary [Content]	
_gd_visitor	...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)
_ga	...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)
_hp2_id.461121704	...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)
_hp2_id.513489544	...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)
_ga_NKMQJY2D2H	...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)

▲ Issues were logged in the [Issues](#) panel in Chrome Devtools ^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Issue type

Mixed content

- ...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)
- ...v173.../s5qdbjncsvpctbfhduzn.jpg (res.cloudinary.com)
- ...v173.../hfnnqkjrygzendhrhsqc.jpg (res.cloudinary.com)
- ...v173.../qppgeikuny0effy7duoy.jpg (res.cloudinary.com)
- ...v173.../nahrgxv7mwlndxpvn7p.jpg (res.cloudinary.com)
- ...v173.../o09bgwtveooqjmjkulf.jpg (res.cloudinary.com)

Cookie

- ...v173.../lse75aci4w21zj1pu66v.jpg (res.cloudinary.com)
- ...v173.../s5qdbjncsvpctbfhduzn.jpg (res.cloudinary.com)
- ...v173.../qppgeikuny0effy7duoy.jpg (res.cloudinary.com)
- ...v173.../hfnnqkjrygzendhrhsqc.jpg (res.cloudinary.com)
- ...v173.../o09bgwtveooqjmjkulf.jpg (res.cloudinary.com)
- ...v173.../nahrgxv7mwlndxpvn7p.jpg (res.cloudinary.com)

PASSED AUDITS (12)

Hide

Avoids deprecated APIs

Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Allows users to paste into input fields

Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. [Learn more about user-friendly input fields.](#)

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#)

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

Displays images with correct aspect ratio

Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Serves images with appropriate resolution

Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale`

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#)

Document uses legible font sizes — 100% legible text

Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)

Source	Selector	% of Page Text	Font Size								
Legible text		100.00%	≥ 12px								
Page has the HTML doctype											
Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration.											
Properly defines charset											
A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.											
No browser errors logged to the console											
Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. Learn more about this errors in console diagnostic audit											
Page has valid source maps											
Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps.											
<table border="1"> <thead> <tr> <th>URL</th> <th>Map URL</th> </tr> </thead> <tbody> <tr> <td>onrender.com 1st Party</td> <td></td> </tr> <tr> <td>...js/main.c1e22a28.js (pridefrontend.onrender.com)</td> <td>...js/main.c1e22a28.js.map (pridefrontend.onrender.com)</td> </tr> <tr> <td colspan="2">Error: Timed out fetching resource</td></tr> </tbody> </table>				URL	Map URL	onrender.com 1st Party		...js/main.c1e22a28.js (pridefrontend.onrender.com)	...js/main.c1e22a28.js.map (pridefrontend.onrender.com)	Error: Timed out fetching resource	
URL	Map URL										
onrender.com 1st Party											
...js/main.c1e22a28.js (pridefrontend.onrender.com)	...js/main.c1e22a28.js.map (pridefrontend.onrender.com)										
Error: Timed out fetching resource											

NOT APPLICABLE (3)

[Hide](#)

<input type="radio"/> Redirects HTTP traffic to HTTPS
Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more.
<input type="radio"/> Use a strong HSTS policy
Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. Learn more about using a strong HSTS policy.
<input type="radio"/> Detected JavaScript libraries
All front-end JavaScript libraries detected on the page. Learn more about this JavaScript library detection diagnostic audit.



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

CONTENT BEST PRACTICES

Document does not have a meta description

Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Format your HTML in a way that enables crawlers to better understand your app's content.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data.](#)

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (7)

Hide

Page isn't blocked from indexing

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a `<title>` element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Page has successful HTTP status code

Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text

Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable

Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable.](#)

Image elements have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Document has a valid `hreflang`

hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

NOT APPLICABLE (2)

Hide

robots.txt is valid

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

Document has a valid `rel=canonical`

Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

Captured at Mar 19, 2025,
11:46 AM GMT+5:30
Initial page load

[Emulated Moto G Power with](#)
[Lighthouse 12.3.0](#)
[Slow 4G throttling](#)

[Single page session](#)
[Using Chromium 134.0.0.0 with devtools](#)

Generated by **Lighthouse 12.3.0** | [File an issue](#)