

Experiment 1

Collaboration and Remote Repositories:

Clone a remote Git repository to your local machine.

Solution:

To clone a remote Git repository to your local machine, follow these steps:

1. Open your terminal or command prompt.
2. Navigate to the directory where you want to clone the remote Git repository. You can use the `cd` command to change your working directory.
3. Use the `git clone` command to clone the remote repository. Replace `<repository_url>` with the URL of the remote Git repository you want to clone. For example, if you were cloning a repository from GitHub, the URL might look like this:

```
$ git clone <repository_url>
```

Here's a full example:

```
$ git clone https://github.com/username/repo-name.git
```

Replace `https://github.com/username/repo-name.git` with the actual URL of the repository you want to clone.

4. Git will clone the repository to your local machine. Once the process is complete, you will have a local copy of the remote repository in your chosen directory.

You can now work with the cloned repository on your local machine, make changes, and push those changes back to the remote repository as needed.

github.com/signup

Already have an account? [Sign in](#) +

Create your free account

Explore GitHub's core features for individuals and organizations.

[See what's included](#) ▾

Sign up for GitHub

[Continue with Google](#)

or

Email

Password

Password should be at least 15 characters OR at least 8 characters including a number and a lowercase letter.

Username

Username may only contain alphanumeric characters or single hyphens, and cannot begin or end with a hyphen.

Your Country/Region

For compliance reasons, we're required to collect country information to send you relevant notices and communications.

github.com/dashboard

Dashboard

Type to search

Top repositories

[Find a repository...](#)

- nandiyamb/GITLAB1
- nandiyamb/Git-Commands
- nandiyamb/PMGT

Home

Ask Copilot

[Get started with GitHub](#) [Learn to code](#) [Create a web app](#)

Getting started

1/3 complete

[Create your first code project](#)

- New issue
- New repository
- Import repository
- New codespace
- New gist
- New organization
- New project

New repository

Type to search

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*).

1 General

Owner / Repository name

[GITLAB2 is available](#)

Great repository names are short and memorable. How about fuzzy-guacamole?

Description

0 / 350 characters

2 Configuration

Choose visibility

Choose who can see and commit to this repository

Add README ☐

READMEs can be used as longer descriptions. [About READMEs](#)

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

Add license

Licenses explain how others can use your code. [About licenses](#)

[Create repository](#)



Set up GitHub Copilot

Use GitHub's AI pair programmer to autocomplete suggestions as you code.

Get started with GitHub Copilot



Add collaborators to this repository

Search for people using their GitHub username or email address.

Invite collaborators

Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH <https://github.com/nandiyamb/GITLAB2.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# GITLAB2" >> README.md
```

GITLAB2 /



Drag additional files here to add them to your repository

Or choose your files

Java_syllabus.pdf

Uploading 1 of 1 files



Commit changes

Add files via upload

Add an optional extended description...

Commit changes

Cancel

main 1 Branch 0 Tags

Go to file

Add file

Code

About

nandiyamb Add files via upload

6afdf30 · 16 minutes ago 1 Commit

Java_syllabus.pdf

Add files via upload

16 minutes ago

README



Add a README

Help people interested in this repository understand your project by adding a README.

Add a README

No description

Activity

0 stars

0 watch

0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)

 **GITLAB2** Public

 Pin  Watch 0  Fork

 main  1 Branch  0 Tags  Add file  Code

 **nandiyamb** Add files via upload 6afdd0 · 16 minutes ago  1 Commit

 Java_syllabus.pdf Add files via upload 16 minutes ago

 README



Add a README

Help people interested in this repository understand your project by adding a README.



No description

 Activity

 0 stars

 0 watch

 0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)

 **nandiyamb / GITLAB2**

 Code  Issues  Pull requests  Actions  Projects  Wiki  Security  Insights  Settings

 Files

 main   Go to file

 GIT-LAB-MANUAL.pdf

 Java_syllabus.pdf

GITLAB2 / Java_syllabus.pdf

 **nandiyamb** Add files via upload 3.54 KB

Annexure-II 18.08.2022

Object Oriented Programming with JAVA		Semester	3
Course Code	BCS306A	CIE Marks	50
Teaching Hours/Week (L:T:P:S)	2:0:2	SEE Marks	50
Total Hours of Pedagogy	28 Hours of Theory + 20 Hours of Practical	Total Marks	100
Credits	03	Exam Hours	03
Examination type (SEE)	Theory		

Note - Students who have undergone "Basics of Java Programming- BPLCK105C/205C" in first year are not eligible to opt this course

Course objectives:

- To learn primitive constructs JAVA programming language.
- To understand Object Oriented Programming Features of JAVA.
- To gain knowledge on packages, multithreaded programming and exceptions.

Teaching-Learning Process (General Instructions)

 **GITLAB2** Public

 Pin  Watch 0

 main  1 Branch  0 Tags  Add file  Code

 **nandiyamb** Add files via upload c826208 · 10 minutes ago  2 Commits

 GIT-LAB-MANUAL.pdf Add files via upload 10 minutes ago

 Java_syllabus.pdf Add files via upload 30 minutes ago

 README

AI

Ni

 Activity

 0 stars

 0 watch

 0 forks

Releases

No releases published

[Create a new release](#)

Branches

Overview Yours Active Stale All

Q Search branches...

Default

Branch	Updated	Check status	Behind
main	10 minutes ago		Def

github.com/nandiyamb/GITLAB2

GitLab2 Public

main 1 Branch 0 Tags

Go to file Add file <> Code

Local

Clone

HTTPS SSH GitHub CLI

Copy url to clipboard

https://github.com/nandiyamb/GITLAB2.git

Clone using the web URL

Open with GitHub Desktop

Download ZIP

Add a README



Help people interested in this repository understand your project by adding a README.

Add a README

```
ADMIN@DESKTOP-TS5V82H
$ ls
1.txt 2.txt 3.txt
```

```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git clone https://github.com/bipyamk/bipgitlab.git
Cloning into 'bipgitlab'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (6/6), 4.21 MiB | 1.70 MiB/s, done.

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ ls
1.txt 2.txt 3.txt bipgitlab/
```

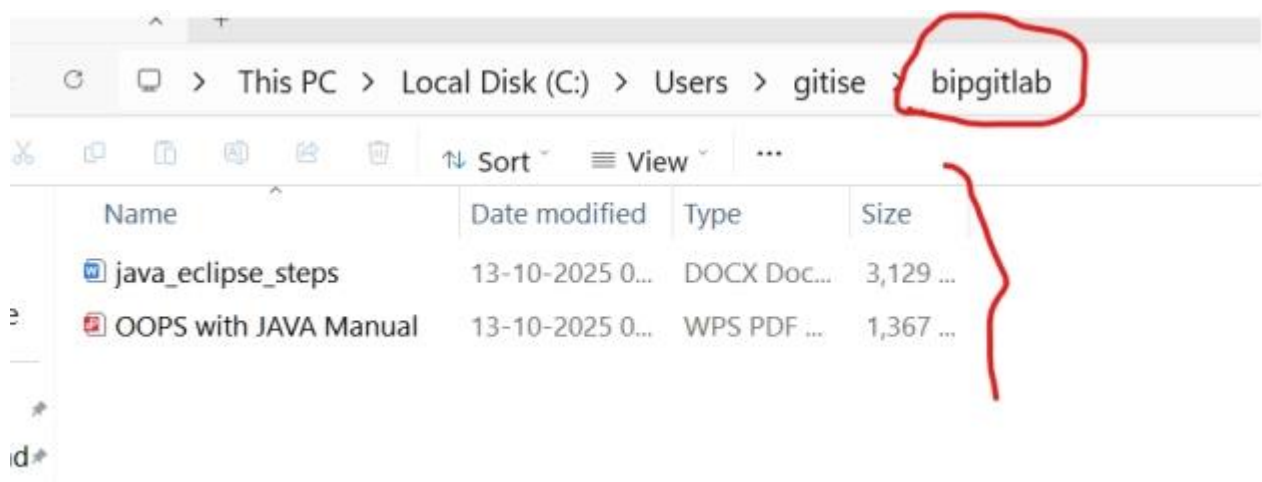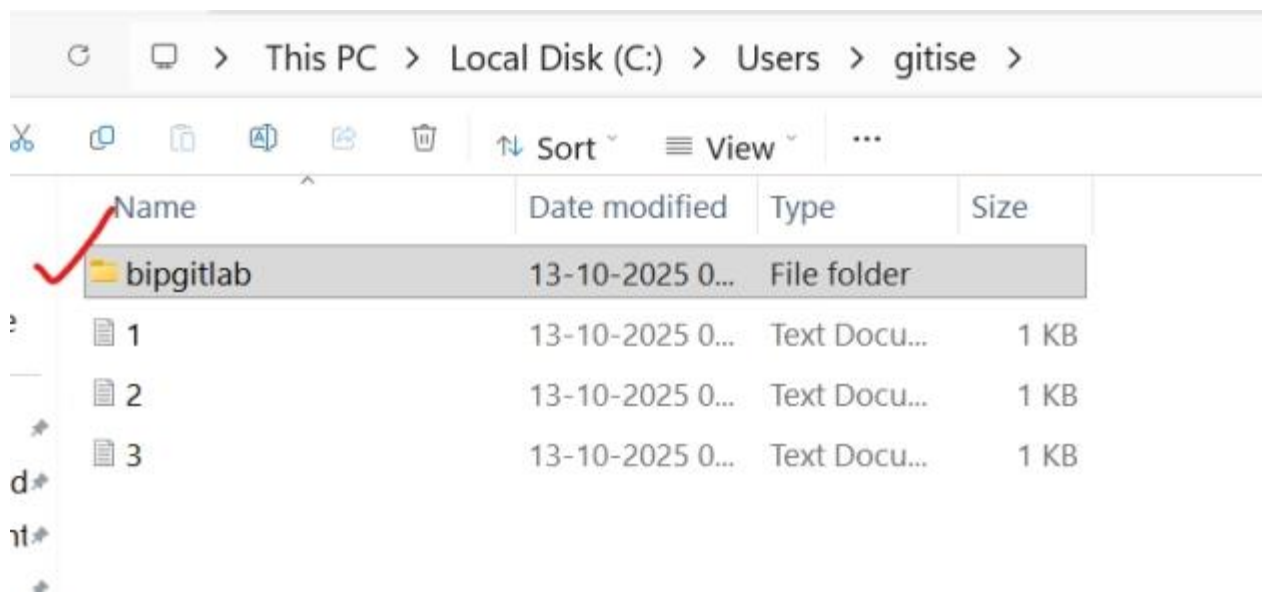

bipgitlab Public

Pin View

main 2 Branches 0 Tags

Go to file

t

+

<> Code

bipgitlab Add files via upload

ea947f2 · 3 days ago

2 Commits

OOPS with JAVA Manual.pdf

Add files via upload

3 days

java_eclipse_steps.docx

Add files via upload

3 days

README



github.com/bipyamk/bipgitlab/branches

Overview Yours Active Stale All

Search branches...

Default

Branch	Updated	Check status	Behind	Ahead	Pull request
main	3 days ago			Default	

Your branches

Branch	Updated	Check status	Behind	Ahead	Pull request
master	yesterday		0	2	

Active branches

Branch	Updated	Check status	Behind	Ahead	Pull request
master	yesterday		0	2	

Experiment 5.

Collaboration and Remote Repositories:

Fetch the latest changes from a remote repository and rebase your local branch onto the updated remote branch.

Solution:

To fetch the latest changes from a remote repository and rebase your local branch onto the updated remote branch in Git, follow these steps:

1. Open your terminal or command prompt.
2. Make sure you are in the local branch that you want to rebase. You can switch to the branch using the following command, replacing <branch-name> with your actual branch name:

```
$ git checkout <branch-name>
```

3. Fetch the latest changes from the remote repository. This will update your local repository with the changes from the remote without merging them into your local branch:

```
$ git fetch origin
```

Here, origin is the default name for the remote repository. If you have multiple remotes, replace origin with the name of the specific remote you want to fetch from.

4. Once you have fetched the latest changes, rebase your local branch onto the updated remote branch:

```
$ git rebase origin/<branch-name>
```

Replace <branch-name> with the name of the remote branch you want to rebase onto. This command will reapply your local commits on top of the latest changes from the remote branch, effectively incorporating the remote changes into your branch history.



5. Resolve any conflicts that may arise during the rebase process. Git will stop and notify you if there are conflicts that need to be resolved. Use a text editor to edit the conflicting files, save the changes, and then continue the rebase with:


```
$ git rebase --continue
```

6. After resolving any conflicts and completing the rebase, you have successfully updated your local branch with the latest changes from the remote branch.
7. If you want to push your rebased changes to the remote repository, use the git push command. However, be cautious when pushing to a shared remote branch, as it can potentially overwrite other developers' changes:

\$ git push origin <branch-name>

Replace <branch-name> with the name of your local branch. By following these steps, you can keep your local branch up to date with the latest changes from the remote repository and maintain a clean and linear history through rebasing.

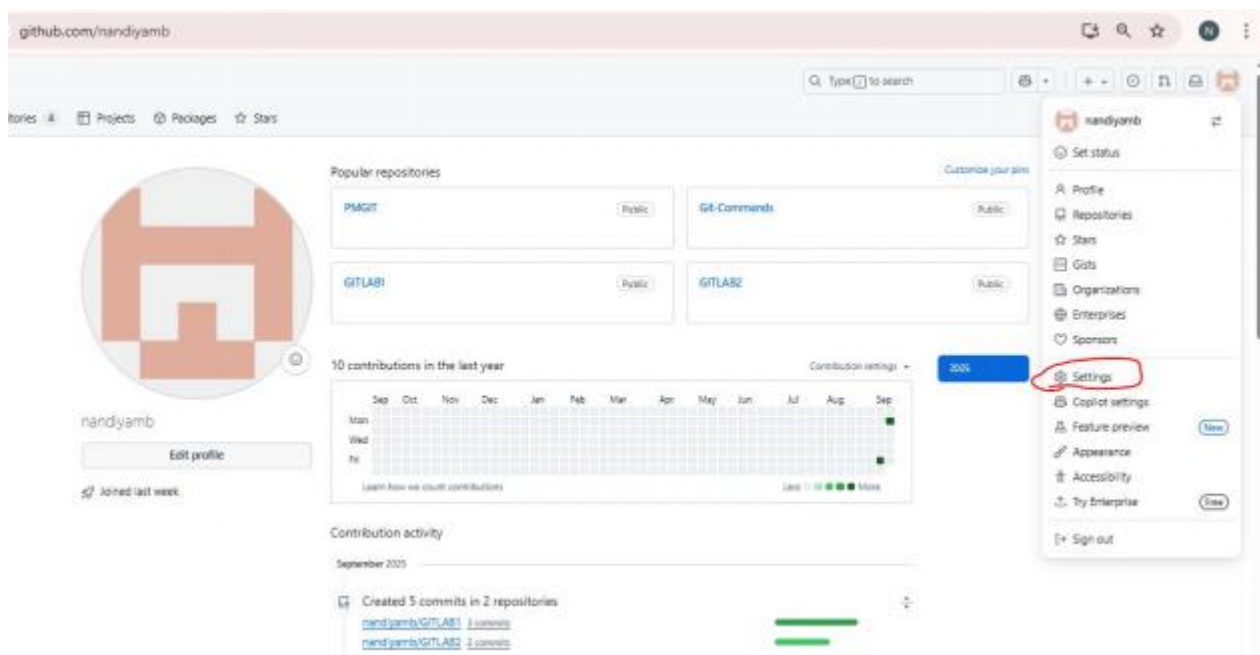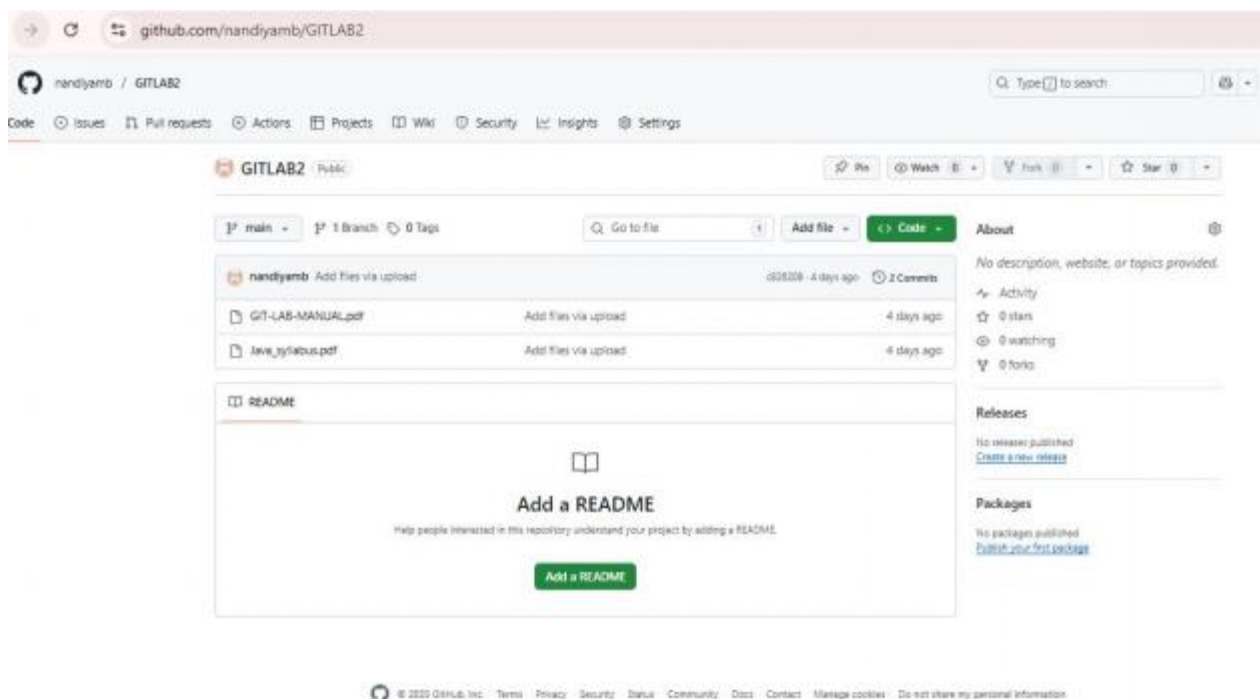

github.com/settings/profile

Organizations

Enterprises

Moderation

Code, planning, and automation

Repositories

Codespaces

Models

Packages

Copilot

Pages

Saved replies

Security

Code security

Integrations

Applications

Scheduled reminders

Archives

Security log

Sponsorship log

<> Developer settings

You can mention other users and organizations to link to them.

Pronouns

Don't specify

URL

Social accounts

Link to social profile 1

Link to social profile 2

Link to social profile 3

Link to social profile 4

Company

You can @mention your company's GitHub organization to link it.

Location

Display current local time

Other users will see the time difference from their local time.

ORCID ID

ORCID provides a persistent identifier - an ORCID iD - that distinguishes you from other researchers. Learn more at [ORCID.org](#)

Connect your ORCID iD

All of the fields on this page are optional and can be deleted at any time, and by filling them out, you're giving us consent to share this data wherever your user profile appears. Please see our [privacy statement](#) to learn more about how we use this information.

Update profile

github.com/settings/apps

ngs / Developer Settings

GitHub Apps

OAuth Apps

Personal access tokens

Fine-grained tokens

Tokens (classic)

GitHub Apps

No GitHub Apps

Want to build something that integrates with and extends GitHub? Register a new GitHub get started developing on the GitHub API.

New GitHub App

View documentation

 github.com/settings/tokens

Developer Settings

Type to search

 GitHub Apps

 OAuth Apps

 Personal access tokens

 Fine-grained tokens

 Tokens (classic)

Personal access tokens (classic)

Generate new token ▾

Tokens you have generated that can be used to access the [GitHub API](#).

GITEXP — admin:enterprise, admin:org_key, admin:org, admin:org_hook, admin:public_key, admin:ssh_signing_key, audit_log, codepaces, copilot, delete_packages, delete_repo, grant_permissions, install_discussion, write_network_configurations, write_packages

Expires on Sun, Oct 12 2025.

Generate new token
Fine-grained, repo-scoped

Generate new token (classic)
For general use

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

 © 2025 GitHub, Inc. [Terms](#) [Privacy](#) [Security](#) [Status](#) [Community](#) [Docs](#) [Contact](#) [Manage cookies](#) [Do not share my personal information](#)

 github.com/settings/tokens/new

Confirm access

 Signed in as @nandiyamb

Password

[Forgot password?](#)

Confirm

Tip: You are entering [sudo mode](#). After you've performed a sudo-protected action, you'll only be asked to re-authenticate again after a few hours of inactivity.

github.com/settings/tokens/new

Developer Settings

Type to search

GitHub Apps

OAuth Apps

Personal access tokens

Fine-grained tokens

Tokens (classic)

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

github

What is this token for?

Expiration

30 days (Oct 18, 2025)

The token will expire on the selected date

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

☐ repo	Full control of private repositories
☐ repos:status	Access commit status
☐ repo:deployment	Access deployment status
☐ public_repo	Access public repositories
☐ repo:invite	Access repository invitations
☐ security_events	Read and write security events
☐ workflow	Update GitHub Action workflows
☐ write:packages	Upload packages to GitHub Package Registry
☐ read:packages	Download packages from GitHub Package Registry
☐ delete:packages	Delete packages from GitHub Package Registry
☐ admin:org	Full control of orgs and teams, read and write org projects
☐ write:org	Read and write org and team membership, read and write org projects

github.com/settings/tokens/new

☒ delete_repo	Delete repositories
☒ write:discussion	Read and write team discussions
☐ read:discussion	Read team discussions
☒ admin:enterprise	Full control of enterprises
☐ manage_runners:enterprise	Manage enterprise runners and runner groups
☐ manage_billing:enterprise	Read and write enterprise billing data
☐ read:enterprise	Read enterprise profile data
☐ scm:enterprise	Provisioning of users and groups via SCM
☒ audit_log	Full control of audit log
☐ read:audit_log	Read access of audit log
☒ codespace	Full control of codespaces
☐ codespace:secrets	Ability to create, read, update, and delete codespace secrets
☒ copilot	Full control of GitHub Copilot settings and seat assignments
☐ manage_billing:copilot	View and edit Copilot Business seat assignments
☒ write:network_configurations	Write org hosted compute network configurations
☐ read:network_configurations	Read org hosted compute network configurations
☒ project	Full control of projects
☐ read:project	Read access of projects
☒ admin:gpg_key	Full control of public user GPG keys
☐ write:gpg_key	Write public user GPG keys
☐ read:gpg_key	Read public user GPG keys
☒ admin:ssh_signing_key	Full control of public user SSH signing keys
☐ write:ssh_signing_key	Write public user SSH signing keys
☐ read:ssh_signing_key	Read public user SSH signing keys

Generate token

Cancel

github.com/settings/tokens

/ Developer Settings

Search Type to search

I've selected are included in other scopes. Only the minimum set of necessary scopes has been saved.

GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)

Personal access tokens (classic)

Generate new token

Tokens you have generated that can be used to access the [GitHub API](#).

Make sure to copy your personal access token now. You won't be able to see it again!

✓ ghp_A6H4I8BfQBDUwBTSPEeLOFQ76vR8G58BW196	Delete
gitexp — admin:enterprise, admin:gpg_key, admin:org, admin:org_hook, admin:public_key, admin:repo_hook, admin:ssh_signing_key, audit_log, codespace, copilot, delete_packages, delete_repo, gist_notifications, project_repo, user_workflow, write:discussion, write:network_configurations, write_packages Expires on Sun, Oct 19 2025.	Never used Delete
GITEXP — admin:enterprise, admin:gpg_key, admin:org, admin:org_hook, admin:public_key, admin:repo_hook, admin:ssh_signing_key, audit_log, codespace, copilot, delete_packages, delete_repo, gist_notifications, project_repo, user_workflow, write:discussion, write:network_configurations, write_packages Expires on Sun, Oct 12 2025.	Never used Delete

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise/bipgitlab (main)
$ cd ..

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git branch
  feature-branch
* master
```



```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git checkout feature-branch
A      3.txt
Switched to branch 'feature-branch'

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git remote add origin https://github.com/bipyamk/bipgitlab.git

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git remote set-url origin https://ghp_wPgTfCXsa3PT1c1L3ILAnTnpfwBz99176Cy0@git
hub.com/bipyamk/bipgitlab.git

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git branch
* feature-branch
  master

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git checkout master
A      3.txt
Switched to branch 'master'

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git fetch origin
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
```

```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git stash
Saved working directory and index state WIP on master: c31e341 File 2

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git rebase origin/main
Successfully rebased and updated refs/heads/master.

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git stash pop
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   3.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    bipgitlab/

Dropped refs/stash@{0} (45735fd20f0102552e0f47aeda6bfa8a09b810f3)

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git push origin master
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 8 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (6/6), 638 bytes | 159.00 KiB/s, done.
Total 6 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
remote:
remote: Create a pull request for 'master' on GitHub by visiting:
remote:   https://github.com/bipyamk/bipgitlab/pull/new/master
```

→  github.com/nandiyamb/GITLAB2

nandiyamb / GITLAB2

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

 **GITLAB2** Public    

 master had recent pushes 4 minutes ago 

 main  2 Branches  0 Tags  

 nandiyamb Add files via upload c824208 · 4 days ago 2 Commits

 GIT-LAB-MANUAL.pdf Add files via upload 4 days ago

 Java_syllabus.pdf Add files via upload 4 days ago

 **README**



About

No description, website, or topics provided

Activity

0 stars
0 watching
0 forks

Releases

No releases published
[Create a new release](#)

Packages

No packages published
[Publish your first package](#)

→  github.com/nandiyamb/GITLAB2/branches

nandiyamb / GITLAB2

Issues Pull requests Actions Projects Wiki Security Insights Settings

Branches 

Overview Yours Active Stale All

Default

Branch	Updated	Check status	Behind / Ahead	Pull request
 main	4 days ago		Default	 ...

Your branches

Branch	Updated	Check status	Behind / Ahead	Pull request
 master	5 minutes ago		0: 27	 ...

Active branches

Branch	Updated	Check status	Behind / Ahead	Pull request
 master	5 minutes ago		0: 27	 ...

master 2 Branches 0 Tags

Go to file

Code

About

This branch is 2 commits ahead of main.

Contribute

nanditayambem File 2 a71b365 · yesterday 4 Commits

1.txt file 1 yesterday

2.txt File 2 yesterday

OOPS with JAVA Manual.pdf Add files via upload 3 days ago

java_eclipse_steps.docx Add files via upload 3 days ago

README

No descr

Activi

0 stai

0 wat

0 forl

Releases

No releases

Create a ne

Package

No packagi

Publish you

Experiment 18

Collaboration and Remote Repositories:

Clone a remote Git repository to your local machine.

Solution:

To clone a remote Git repository to your local machine, follow these steps:

1. Open your terminal or command prompt.
2. Navigate to the directory where you want to clone the remote Git repository. You can use the `cd` command to change your working directory.
3. Use the `git clone` command to clone the remote repository. Replace `<repository_url>` with the URL of the remote Git repository you want to clone. For example, if you were cloning a repository from GitHub, the URL might look like this:

```
$ git clone <repository_url>
```

Here's a full example:

```
$ git clone https://github.com/username/repo-name.git
```

Replace `https://github.com/username/repo-name.git` with the actual URL of the repository you want to clone.

4. Git will clone the repository to your local machine. Once the process is complete, you will have a local copy of the remote repository in your chosen directory.

You can now work with the cloned repository on your local machine, make changes, and push those changes back to the remote repository as needed.

github.com/signup

Already have an account? [Sign in](#)

Create your free account

Explore GitHub's core features for individuals and organizations.

[See what's included](#)

Sign up for GitHub

[Continue with Google](#)

or

Email*

Email

Password*

Password

Password should be at least 15 characters OR at least 8 characters including a number and a lowercase letter.

Username*

Username

Username may only contain alphanumeric characters or single hyphens, and cannot begin or end with a hyphen.

Your Country/Region*

India

For compliance reasons, we're required to collect country information to send you relevant notices and communications.

github.com/dashboard

Dashboard

Type to search

Top repositories

Find a repository...

- nandiyamb/GITLAB1
- nandiyamb/Git-Commands
- nandiyamb/PMGT

Home

Ask Copilot

Get started with GitHub

Learn to code

Create a web app

Getting started

1/3 complete

Create your first code project

- New issue
- New repository
- Import repository
- New codespace
- New gist
- New organization
- New project

New repository

Type to search

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*).

1 General

Owner *

nandiyamb

Repository name *

GITLAB2

GITLAB2 is available

Great repository names are short and memorable. How about fuzzy-guacamole?

Description

0 / 350 characters

2 Configuration

Choose visibility *

Choose who can see and commit to this repository

Public

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

OFF

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore

Add license

Licenses explain how others can use your code. [About licenses](#)

No license

Create repository



Set up GitHub Copilot

Use GitHub's AI pair programmer to autocomplete suggestions as you code.

Get started with GitHub Copilot



Add collaborators to this repository

Search for people using their GitHub username or email address.

Invite collaborators

Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH <https://github.com/nandiyamb/GITLAB2.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# GITLAB2" >> README.md
```

GITLAB2 /



Drag additional files here to add them to your repository

Or choose your files

Java_syllabus.pdf

Uploading 1 of 1 files



Commit changes

Add files via upload

Add an optional extended description...

Commit changes

Cancel

main 1 Branch 0 Tags

Go to file

Add file

Code

About

nandiyamb Add files via upload

6afdf30 · 16 minutes ago 1 Commit

Java_syllabus.pdf

Add files via upload

16 minutes ago

README



Add a README

Help people interested in this repository understand your project by adding a README.

Add a README

No description

Activity

0 stars

0 watch

0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)

GITLAB2
Public

0

main
1 Branch
0 Tags

nandiyamb
Add files via upload
6afdd0 · 16 minutes ago
1 Commit

Java_syllabus.pdf
Add files via upload
16 minutes ago

README

No description

Activity

0 stars

0 watch

0 forks

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

nandiyamb / GITLAB2

Code
Issues
Pull requests
Actions
Projects
Wiki
Security
Insights
Settings

Files

main
+

GIT-LAB-MANUAL.pdf
Java_syllabus.pdf

nandiyamb
Add files via upload

Java_syllabus.pdf
3.54 KB

Annexure-II

Object Oriented Programming with JAVA		Semester	3
Course Code	BCS306A	CIE Marks	50
Teaching Hours/Week (L:T:P:S)	2:0:2	SEE Marks	50
Total Hours of Pedagogy	28 Hours of Theory + 20 Hours of Practical	Total Marks	100
Credits	03	Exam Hours	03
Examination type (SEE)	Theory		
Note - Students who have undergone "Basics of Java Programming- BPLCK105C/205C" in first year are not eligible to opt this course			
Course objectives: - To learn primitive constructs JAVA programming language. - To understand Object Oriented Programming Features of JAVA. - To gain knowledge on packages, multithreaded programming and exceptions.			
Teaching-Learning Process (General Instructions)			

GITLAB2
Public

0

main
1 Branch
0 Tags

nandiyamb
Add files via upload
c826208 · 10 minutes ago
2 Commits

GIT-LAB-MANUAL.pdf
Add files via upload
10 minutes ago

Java_syllabus.pdf
Add files via upload
30 minutes ago

README

Branches

Overview Yours Active Stale All

Q Search branches...

Default

Branch	Updated	Check status	Behind
main	10 minutes ago		Def

github.com/nandiyamb/GITLAB2

GitLab2 Public

main 1 Branch 0 Tags

Go to file Add file <> Code

Local

Clone

HTTPS SSH GitHub CLI

Copy url to clipboard

https://github.com/nandiyamb/GITLAB2.git

Clone using the web URL

Open with GitHub Desktop

Download ZIP

Add a README



Help people interested in this repository understand your project by adding a README.

Add a README

```
ADMIN@DESKTOP-TS5V82H
$ ls
1.txt 2.txt 3.txt
```

```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git clone https://github.com/bipyamk/bipgitlab.git
Cloning into 'bipgitlab'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (6/6), 4.21 MiB | 1.70 MiB/s, done.

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ ls
1.txt 2.txt 3.txt bipgitlab/
```

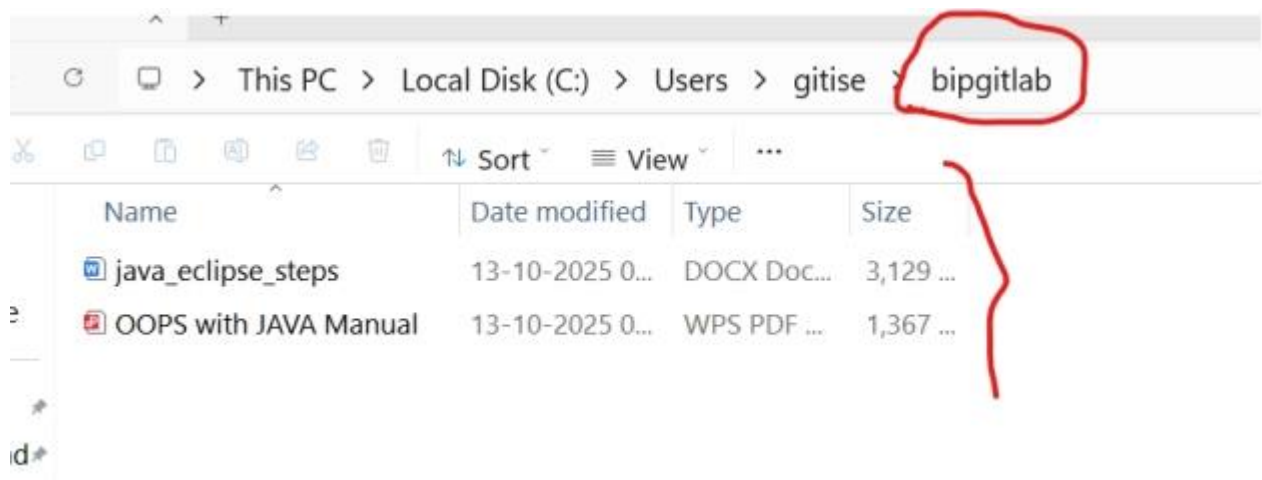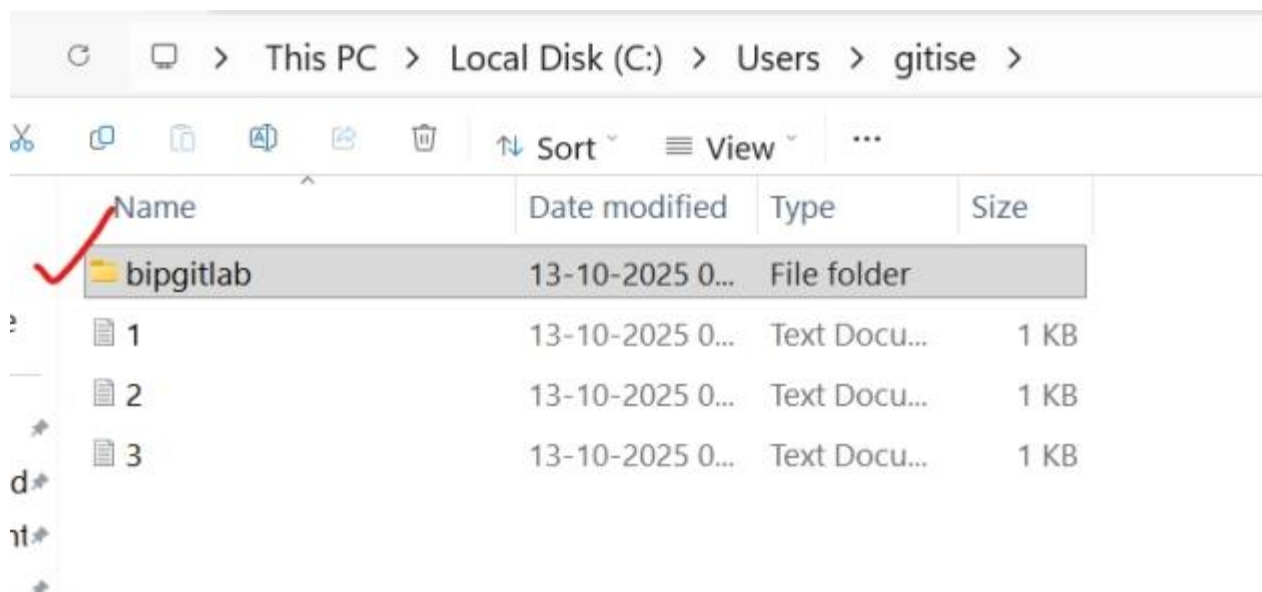

 **bipgitlab** Public

[Pin](#) [View](#)

[main](#) [2 Branches](#) [0 Tags](#)

[Go to file](#)

[t](#)

[+](#)

[Code](#)

 **bipyamk** Add files via upload

ea947f2 · 3 days ago [2 Commits](#)

 OOPS with JAVA Manual.pdf

Add files via upload

3 days

 java_eclipse_steps.docx

Add files via upload

3 days

[README](#)



[github.com/bipyamk/bipgitlab/branches](#)

[Overview](#) [Yours](#) [Active](#) [Stale](#) [All](#)

[Search branches...](#)

Default

Branch	Updated	Check status	Behind	Ahead	Pull request
main 	 3 days ago			Default	

Your branches

Branch	Updated	Check status	Behind	Ahead	Pull request
master 	 yesterday		0	2	

Active branches

Branch	Updated	Check status	Behind	Ahead	Pull request
master 	 yesterday		0	2	

Experiment 5.

Collaboration and Remote Repositories:

Fetch the latest changes from a remote repository and rebase your local branch onto the updated remote branch.

Solution:

To fetch the latest changes from a remote repository and rebase your local branch onto the updated remote branch in Git, follow these steps:

1. Open your terminal or command prompt.
2. Make sure you are in the local branch that you want to rebase. You can switch to the branch using the following command, replacing <branch-name> with your actual branch name:

```
$ git checkout <branch-name>
```

3. Fetch the latest changes from the remote repository. This will update your local repository with the changes from the remote without merging them into your local branch:

```
$ git fetch origin
```

Here, origin is the default name for the remote repository. If you have multiple remotes, replace origin with the name of the specific remote you want to fetch from.

4. Once you have fetched the latest changes, rebase your local branch onto the updated remote branch:

```
$ git rebase origin/<branch-name>
```

Replace <branch-name> with the name of the remote branch you want to rebase onto. This command will reapply your local commits on top of the latest changes from the remote branch, effectively incorporating the remote changes into your branch history.


5. Resolve any conflicts that may arise during the rebase process. Git will stop and notify you if there are conflicts that need to be resolved. Use a text editor to edit the conflicting files, save the changes, and then continue the rebase with:

```
$ git rebase --continue
```

6. After resolving any conflicts and completing the rebase, you have successfully updated your local branch with the latest changes from the remote branch.
7. If you want to push your rebased changes to the remote repository, use the git push command. However, be cautious when pushing to a shared remote branch, as it can potentially overwrite other developers' changes:

\$ git push origin <branch-name>

Replace <branch-name> with the name of your local branch. By following these steps, you can keep your local branch up to date with the latest changes from the remote repository and maintain a clean and linear history through rebasing.

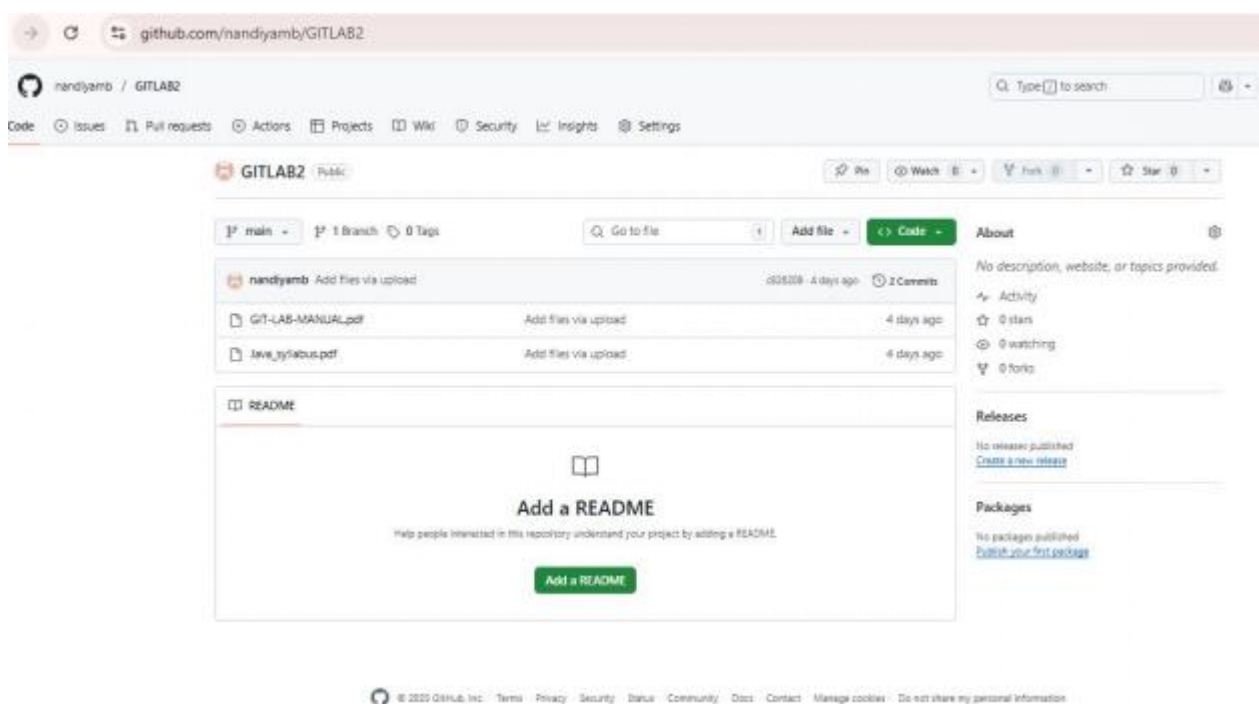

github.com/nandiyamb

Search Type to search

Repositories Projects Packages Stars

Popular repositories

- PM2
- GitLab
- GitLab
- GitLab

10 contributions in the last year

Contribution settings

Contribution activity

September 2025

Created 5 commits in 2 repositories

- nandiyamb/GitLab
- nandiyamb/GitLab

Settings

- Set status
- Profile
- Repositories
- Stars
- Gists
- Organizations
- Enterprises
- Sponsors
- Settings
- Copilot settings
- Feature preview
- Appearance
- Accessibility
- Try Enterprise
- Sign out

github.com/settings/profile

Organizations

Enterprises

Moderation

Code, planning, and automation

- Repositories
- Codespaces
- Models
- Packages
- Copilot
- Pages
- Saved replies

Security

- Code security

Integrations

- Applications
- Scheduled reminders

Archives

- Security log
- Sponsorship log
- Developer settings

You can mention other users and organizations to link to them.

Pronouns

Don't specify

URL

Social accounts

- Link to social profile 1
- Link to social profile 2
- Link to social profile 3
- Link to social profile 4

Company

You can @mention your company's GitHub organization to link it.

Location

Display current local time

Other users will see the time difference from their local time.

ORCID ID

ORCID provides a persistent identifier - an ORCID ID - that distinguishes you from other researchers. Learn more at [ORCID.org](https://orcid.org)

Connect your ORCID ID

All of the fields on this page are optional and can be deleted at any time, and by filling them out, you're giving us consent to share this data wherever your user profile appears. Please see our [privacy statement](#) to learn more about how we use this information.

Update profile

[View documentation](#)

Confirm access



Signed in as @nandiyamb

Password

.....

[Forgot password?](#)

Confirm

Tip: You are entering [sudo mode](#). After you've performed a sudo-protected action, you'll only be asked to re-authenticate again after a few hours of inactivity.

GitHub Apps

OAuth Apps

Personal access tokens

Fine-grained tokens

Tokens (classic)

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

ghexp[

What is this token for?

Expiration

30 days (Oct 18, 2025) -

The token will expire on the selected date

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#)

☐ repo	Full control of private repositories
☐ repo:status	Access commit status
☐ repo:deployment	Access deployment status
☐ public_repo	Access public repositories
☐ repo:invite	Access repository invitations
☐ security_events	Read and write security events
☐ workflow	Update GitHub Action workflows
☐ write:packages	Upload packages to GitHub Package Registry
☐ read:packages	Download packages from GitHub Package Registry
☐ delete:packages	Delete packages from GitHub Package Registry
☐ admin:org	Full control of orgs and teams, read and write org projects
☐ write:org	Read and write org and team membership, read and write org projects

☒ delete_repo	Delete repositories
☒ writediscussion	Read and write team discussions
☐ readdiscussion	Read team discussions
☒ adminenterprise	Full control of enterprises
☐ manage_runnersenterprise	Manage enterprise runners and runner groups
☐ manage_billingenterprise	Read and write enterprise billing data
☐ readenterprise	Read enterprise profile data
☐ scmenterprise	Provisioning of users and groups via SCM
☒ audit_log	Full control of audit log
☐ readaudit_log	Read access of audit log
☒ codespace	Full control of codespaces
☐ codespace_secrets	Ability to create, read, update, and delete codespace secrets
☒ copilot	Full control of GitHub Copilot settings and seat assignments
☐ manage_billingcopilot	View and edit Copilot Business seat assignments
☒ write_network_configurations	Write org hosted compute network configurations
☐ read_network_configurations	Read org hosted compute network configurations
☒ project	Full control of projects
☐ readproject	Read access of projects
☒ admin_gpg_key	Full control of public user GPG keys
☐ write_gpg_key	Write public user GPG keys
☐ read_gpg_key	Read public user GPG keys
☒ admin_ssh_signing_key	Full control of public user SSH signing keys
☐ write_ssh_signing_key	Write public user SSH signing keys
☐ read_ssh_signing_key	Read public user SSH signing keys

[Generate token](#)[Cancel](#)

/ Developer Settings

Type to search

I've selected are included in other scopes. Only the minimum set of necessary scopes has been saved.

- Github Apps
- OAuth Apps
- Personal access tokens
 - Fine-grained tokens
 - Tokens (classic)

Personal access tokens (classic)

[Generate new token](#)Tokens you have generated that can be used to access the [GitHub API](#).

Make sure to copy your personal access token now. You won't be able to see it again!

✓ ghp_AeH4IBBfQBDuWBTSPvEeLOFQ76vR8G58Bw136	Delete
gitexp1 — admin:enterprise, admin:gpg_key, admin:org, admin:org_hook, admin:public_key, admin:repo_hook, admin:ssh_signing_key, audit_log, codespace, copilot, delete_packages, delete_repo, gist_notifications, project, repo, user_workflow, writediscussion, write_network_configurations, write_packages Expires on Sun, Oct 19 2025.	Delete
GITEXP — admin:enterprise, admin:gpg_key, admin:org, admin:org_hook, admin:public_key, admin:repo_hook, admin:ssh_signing_key, audit_log, codespace, copilot, delete_packages, delete_repo, gist_notifications, project, repo, user_workflow, writediscussion, write_network_configurations, write_packages Expires on Sun, Oct 12 2025.	Delete

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise/bipgitlab (main)
$ cd ..

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git branch
  feature-branch
* master
```

```
ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git checkout feature-branch
A       3.txt
Switched to branch 'feature-branch'

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git remote add origin https://github.com/bipyamk/bipgitlab.git

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git remote set-url origin https://ghp_wPgTfCXsa3PTlcIL3ILAnTnpfwBz99176Cy0@git
hub.com/bipyamk/bipgitlab.git

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git branch
* feature-branch
  master

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (feature-branch)
$ git checkout master
A       3.txt
Switched to branch 'master'

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git fetch origin
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
```

```

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git stash
Saved working directory and index state WIP on master: c31e341 File 2

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git rebase origin/main
Successfully rebased and updated refs/heads/master.


ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git stash pop
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   3.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    bipyamlab/

Dropped refs/stash@{0} (45735fd20f0102552e0f47aeda6bfa8a09b810f3)

ADMIN@DESKTOP-TS5V82H MINGW64 /c/Users/gitise (master)
$ git push origin master
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 8 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (6/6), 638 bytes | 159.00 KiB/s, done.
Total 6 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
remote:
remote: Create a pull request for 'master' on GitHub by visiting:
remote: https://github.com/bipyamk/bipyamlab/pull/new/master

```

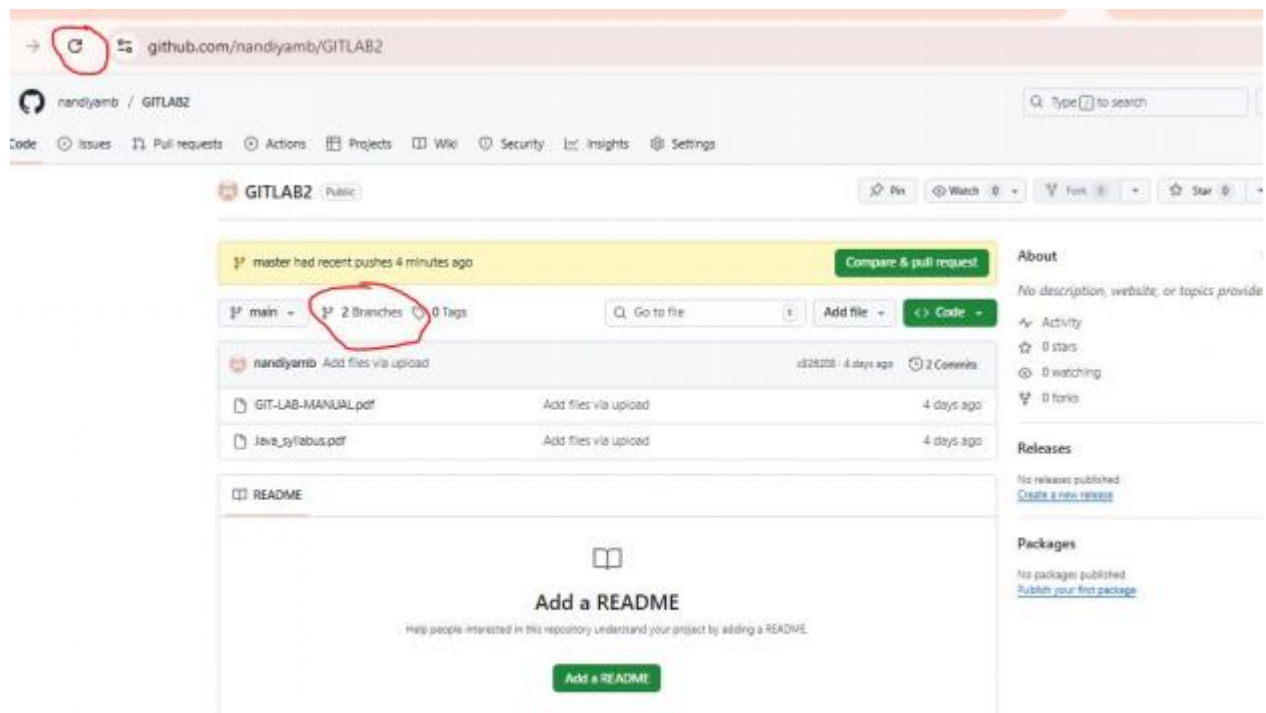

github.com/nandiyamb/GITLAB2/branches

nandiyamb / GITLAB2

Issues Pull requests Actions Projects Wiki Security Insights Settings

Branches New branch

Overview Yours Active Stale All

Search branches...

Default

Branch	Updated	Check status	Behind / Ahead	Pull request
main	4 days ago		Default	

Your branches

Branch	Updated	Check status	Behind / Ahead	Pull request
master	5 minutes ago		0:27	

Active branches

Branch	Updated	Check status	Behind / Ahead	Pull request
master	5 minutes ago		0:27	

github.com/bipyamk/bipgitlab/tree/master

bipgitlab Public

Pin Watch 0

master 2 Branches 0 Tags

Go to file

Code

This branch is 2 commits ahead of main.

Contribute

nanditayambem File 2 a71b365 · yesterday 4 Commits

1.txt	file 1	yesterday
2.txt	File 2	yesterday
OOPS with JAVA Manual.pdf	Add files via upload	3 days ago
java_eclipse_steps.docx	Add files via upload	3 days ago

README

About

No descr

Active

0 star

0 wat

0 for

Releases

No releases

Create a ne

Package

No packagi

Publish you