

# EXPERIMENT 1

## **AIM:**

To design and develop a simple personal portfolio website using basic HTML, CSS, and JavaScript that displays personal details, skills, projects, and contact information

## **TASKS:**

- . Create a project folder named personal portfolio.
- . Create index.html, style.css, and script.js files.
- . Design sections for About, Skills, Projects, and Contact.
- . Apply basic styling using CSS.

## **TECH STACK USED:**

HTML, CSS, JavaScript, VS Code (Editor), Web Browser (Chrome)


## **CODE:**

```
index.html X
experiment_1 > index.html > html > body > section#skills > h2
1  <!DOCTYPE html>
2  <html>
3  <head>
4      <title>My Portfolio</title>
5      <link rel="stylesheet" href="style.css">
6  </head>
7  <body>
8
9      <header>
10         <h1>Prince Tiwary </h1>
11         <p>Computer Science Student</p>
12
13         <nav>
14             <a href="#about">About</a>
15             <a href="#skills">Skills</a>
16             <a href="#projects">Projects</a>
17             <a href="#contact">Contact</a>
18         </nav>
19     </header>
20
21     <section>
22         <h2>Welcome</h2>
23         <button onclick="welcome()">Click Here</button>
24     </section>
25
26     <section id="about">
27         <h2>About Me</h2>
28         <p>I am a B.Tech CSE student learning web development.</p>
29     </section>
30
31     <section id="skills">
32         <h2>Skills</h2>
33         <ul>
34             <li>HTML</li>
35             <li>CSS</li>
36             <li>JavaScript</li>
37         </ul>
38     </section>
39
40     <section id="projects">
41         <h2>Projects</h2>
42     </section>
```

```
# style.css X
experiment_1 > # style.css > body
1 body {
2   font-family: Arial;
3   background: #f2f2f2;
4   margin: 0;
5 }
6
7 header {
8   background: #333;
9   color: white;
10  text-align: center;
11  padding: 20px;
12 }
13
14 nav a {
15   color: white;
16   margin: 10px;
17   text-decoration: none;
18 }
19
20 section {
21   background: white;
22   margin: 15px;
23   padding: 15px;
24 }
25
26 div {
27   border: 1px solid #ccc;
28   padding: 10px;
29   margin-top: 10px;
30 }
31
32 input, textarea, button {
33   margin: 5px 0;
34   padding: 8px;
35   width: 100%;
36 }
37
38 footer {
39   background: #333;
40   color: white;
41   text-align: center;
42   padding: 10px;
43 }
```

```
JS script.js X
experiment_1 > JS script.js > welcome
1 function welcome() {
2   alert("Thank you for visiting!");
3 }
4
5 function submitForm(e) {
6   e.preventDefault();
7   document.getElementById("msg").innerText = "Message submitted successfully";
8 }
9
```

## OUTPUT:

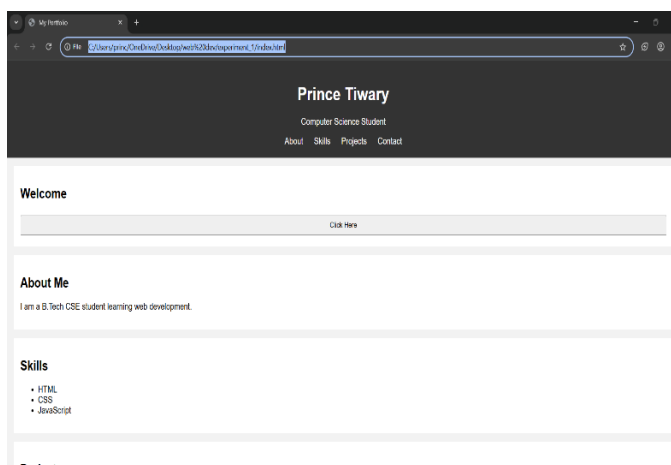

# EXPERIMENT 2

## AIM:

To design and develop a Company Landing Page using HTML and CSS that includes a hero section, about section, services, testimonials, and a contact form.

## TASKS

- . Create a project folder named **company\_landing\_page**.
- . Create **index.html** and **style.css** files inside the folder.
- . Add header comments in HTML (project title, name, date).
- . Apply CSS styling for layout, spacing, colors, fonts, and alignment using box model properties.

## TECK STACK USED


HTML,CSS

## CODE

```
index.html X
experiment 2 > index.html > ...
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <title>PRINCE TIWARY SOLUTIONS</title>
6      <link rel="stylesheet" href="style.css">
7  </head>
8
9  <body>
10
11  <header class="hero">
12      <h1>Prince Tiwary Solutions</h1>
13      <p>Innovating Your Digital Future</p>
14  </header>
15
16  <section id="about">
17      <h2>About Us</h2>
18      <p>
19          Prince Tiwary Solutions is a modern IT company providing web,
20          mobile and cloud solutions for startups and enterprises.
21      </p>
22  </section>
23
24  <section id="services">
25      <h2>Our Services</h2>
26
27      <div class="service-container">
28          <div class="card">
29              <h3>Web Development</h3>
30              <p>Responsive and modern websites for businesses.</p>
31          </div>
32
33          <div class="card">
34              <h3>Mobile App Development</h3>
35              <p>High performance Android & iOS applications.</p>
36          </div>
37
38          <div class="card">
39              <h3>Cloud Solutions</h3>
40              <p>Secure and scalable cloud deployment services.</p>
41          </div>
42      </div>
43  </section>
```

```
# style.css X
experiment_2 > # style.css >  *
1  * {
2    margin: 0;
3    padding: 0;
4    box-sizing: border-box;
5  }
6
7  body {
8    font-family: Arial, sans-serif;
9    line-height: 1.6;
10 }
11
12 .hero {
13   background: #1e3a8a;
14   color: white;
15   text-align: center;
16   padding: 60px 20px;
17 }
18
19 section {
20   padding: 40px;
21   text-align: center;
22 }
23
24 #about {
25   background: #f4f4f4;
26 }
27
28 .service-container {
29   display: flex;
30   justify-content: center;
31   gap: 20px;
32   margin-top: 20px;
33 }
34
35 .card {
36   background: white;
37   padding: 20px;
38   width: 250px;
39   border: 1px solid #ddd;
40   border-radius: 8px;
41 }
42
43 #testimonials {
44   background: #eef2ff;
```

## OUTPUT

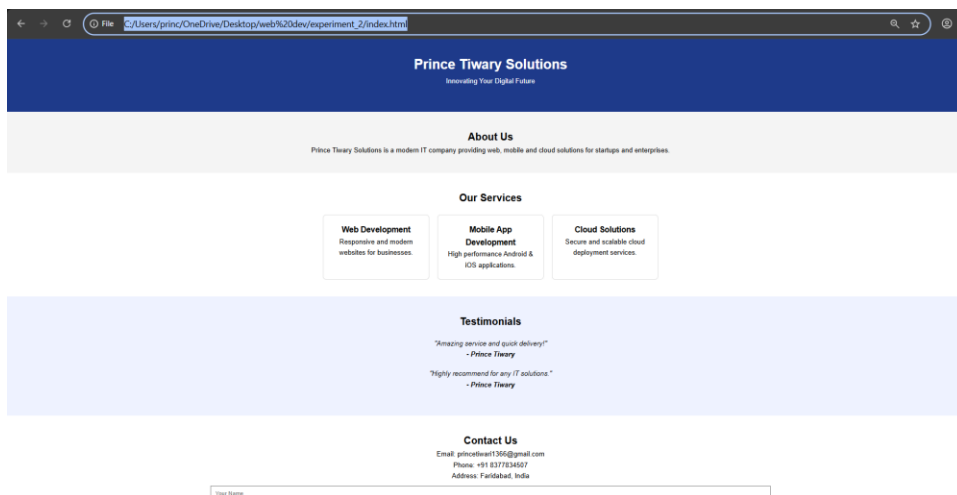

# EXPERIMENT 3

## **AIM:**

To design and develop an **Interactive Quiz Web Application** using HTML, CSS and JavaScript that displays questions, tracks score, shows results and allows restarting the quiz.

## **TASKS:**

- . Create a project folder named **interactive\_quiz**.
- . Capture user answers and move between questions.
- . Track and update quiz score dynamically.
- . Display final result and feedback message.
- . Add **Restart Quiz** feature to reuse the app.

## **TECH STACK USED:**

Html, CSS, JavaScript

## **CODE:**

```
index.html X
experiment_3 > index.html > ...
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <title>Interactive Quiz</title>
6      <link rel="stylesheet" href="style.css">
7  </head>
8
9  <body>
10
11     <div class="container">
12         <h1>General Knowledge Quiz</h1>
13         <p>Test your basic knowledge with this quick quiz.</p>
14
15         <div id="quiz-box">
16             <h2 id="question">Question here</h2>
17             <div id="options"></div>
18             <button id="nextBtn">Next</button>
19         </div>
20
21         <div id="result-box" class="hide">
22             <h2 id="score"></h2>
23             <p id="message"></p>
24             <button onclick="restartQuiz()">Restart Quiz</button>
25         </div>
26     </div>
27
28     <script src="script.js"></script>
29 </body>
30 </html>
31
```

```
# style.css X
experiment_3 > # style.css > body
1  body {
2      font-family: Arial;
3      background: #eef2ff;
4      display: flex;
5      justify-content: center;
6      align-items: center;
7      height: 100vh;
8  }
9
10 .container {
11     background: white;
12     padding: 30px;
13     width: 400px;
14     text-align: center;
15     border-radius: 10px;
16 }
17
18 #options button {
19     display: block;
20     width: 100%;
21     margin: 10px 0;
22     padding: 10px;
23     cursor: pointer;
24 }
25
26 #nextBtn {
27     margin-top: 10px;
28     padding: 10px 20px;
29 }
30
31 .hide {
32     display: none;
33 }
34
```

```

1  const questions = [
2    {
3      question: "Capital of India?",
4      options: ["Mumbai", "Delhi", "Chennai", "Kolkata"],
5      answer: "Delhi"
6    },
7    {
8      question: "2 + 2 = ?",
9      options: ["3", "4", "5", "6"],
10     answer: "4"
11   },
12   {
13     question: "HTML stands for",
14     options: ["Hyper Trainer Markup Language", "Hyper Text Markup Language", "High Text Machine Language", "None"],
15     answer: "Hyper Text Markup Language"
16   }
17 ];
18
19 let currentQ = 0;
20 let score = 0;
21
22 const questionEl = document.getElementById("question");
23 const optionsEl = document.getElementById("options");
24 const nextBtn = document.getElementById("nextBtn");
25
26 function loadQuestion() {
27   optionsEl.innerHTML = "";
28   let q = questions[currentQ];
29   questionEl.textContent = q.question;
30
31   q.options.forEach(option => {
32     let btn = document.createElement("button");
33     btn.textContent = option;
34     btn.onclick = () => selectAnswer(option);
35     optionsEl.appendChild(btn);
36   });
37 }
38
39 function selectAnswer(option) {
40   if (option === questions[currentQ].answer) score++;
41   currentQ++;
42
43   if (currentQ < questions.length) {
44     loadQuestion();

```

## OUTPUT:

### General Knowledge Quiz

Test your basic knowledge with this quick quiz.

#### Capital of India?

Mumbai

Delhi

Chennai

Kolkata

Next

# EXPERIMENT 4

## **AIM:**

To design and develop a Dynamic To-Do List Web Application that allows users to add, edit, delete, and mark tasks as completed using HTML, CSS, and JavaScript.

## **TASKS:**

- . Created project folder dynamic \_to do \_list
- . Designed To-Do interface using HTML
- . Implemented dynamic task addition using JavaScript

## **TECH STACK USED:**

HTML,CSS ,JAVASCRIPT

## **CODE:**

```
index.html X
experiment_4 > index.html > ...
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <title>Dynamic To Do List</title>
6      <link rel="stylesheet" href="style.css">
7  </head>
8  <body>
9
10 <div class="container">
11     <h1>Dynamic To-Do List</h1>
12     <p class="desc">Add, edit, delete and complete your daily tasks.</p>
13
14     <div class="input-section">
15         <input type="text" id="taskInput" placeholder="Enter a task">
16         <button onclick="addTask()">Add Task</button>
17     </div>
18
19     <ul id="taskList"></ul>
20
21     <div class="counter">
22         Completed: <span id="completed">0</span> |
23         Pending: <span id="pending">0</span>
24     </div>
25 </div>
26
27 <script src="script.js"></script>
28 </body>
29 </html>
30
```



```
# style.css X
experiment_4 > # style.css > body
1  body{
2    font-family: Arial, sans-serif;
3    background-color: #f4f6f9;
4    display: flex;
5    justify-content: center;
6    align-items: center;
7    height: 100vh;
8  }
9
10 .container{
11   background-color: white;
12   padding: 25px;
13   width: 400px;
14   border-radius: 10px;
15   box-shadow: 0 0 10px rgba(0,0,0,0.1);
16 }
17
18 h1{
19   text-align: center;
20 }
21
22 .desc{
23   text-align: center;
24   color: gray;
25   margin-bottom: 20px;
26 }
27
28 .input-section{
29   display: flex;
30   gap: 10px;
31 }
32
33 input{
34   flex: 1;
35   padding: 10px;
36   border: 1px solid #ccc;
37   border-radius: 5px;
38 }
39
40 button{
41   padding: 10px 15px;
42   border: none;
43   background-color: #007bff;
```

```
JS script.js X
experiment_4 > JS script.js > ...
1  let taskList = document.getElementById("taskList");
2  let completedCount = document.getElementById("completed");
3  let pendingCount = document.getElementById("pending");
4
5  function updateCounter(){
6    let tasks = document.querySelectorAll("li");
7    let completed = document.querySelectorAll(".completed");
8    completedCount.textContent = completed.length;
9    pendingCount.textContent = tasks.length - completed.length;
10 }
11
12 function addTask(){
13   let input = document.getElementById("taskInput");
14   let taskText = input.value.trim();
15
16   if(taskText === "") return;
17
18   let li = document.createElement("li");
19
20   let checkbox = document.createElement("input");
21   checkbox.type = "checkbox";
22   checkbox.onclick = function(){
23     li.classList.toggle("completed");
24     updateCounter();
25   };
26
27   let span = document.createElement("span");
28   span.textContent = taskText;
29
30   let btnDiv = document.createElement("div");
31   btnDiv.className = "task-btns";
32
33   let editBtn = document.createElement("button");
34   editBtn.textContent = "Edit";
35   editBtn.onclick = function(){
36     let newTask = prompt("Edit task:", span.textContent);
37     if(newTask !== null && newTask.trim() !== ""){
38       span.textContent = newTask;
39     }
40   };
41
42   let deleteBtn = document.createElement("button");
43   deleteBtn.textContent = "Delete";
44   deleteBtn.className = "delete";
```

## OUTPUT:

