



Difference between CSS and Bootstrap:

Cascading Style Sheet(CSS)	Bootstrap
CSS is developed by Hakon Wium Lie, Bert Bos, World Wide Web 17 December 1996.	Bootstrap is developed by Mark Otto, Jacob Thornton 19 August 2011.
CSS represent the style and the appearance of content like font, color, margin, padding, etc.	Bootstrap is a free and open-source CSS Framework that is used for developing responsive website.
CSS does not have a grid system.	Bootstrap is based on-grid system.
It currently working on CSS3 which is the latest version of CSS.	Bootstrap currently working on Bootstrap 5 which is the latest version of Bootstrap.
CSS does not provide responsive pages or website.	In Bootstrap we can design a responsive website or webpages.
CSS is more complex than Bootstrap because there is no pre-defined class and design.	Bootstrap is easy to understand and it has much pre-design class.
In CSS, we have to write code from scratch.	In Bootstrap, we can add pre-defined class into the code without writing code.

Bootstrap

- Bootstrap is the most popular HTML, CSS and JavaScript framework for developing a responsive and mobile friendly website.
- It is absolutely free to download and use.
- It is a front-end framework used for easier and faster web development.
- It includes HTML and CSS based design templates for typography, forms, buttons, tables, navigation, modals and many others.
- It can also use JavaScript plug-ins.
- It facilitates you to create responsive designs.
- Latest version: Bootstrap 5

Responsive website?

A website is called responsive website which can automatically adjust itself to look good on all devices, from smart phones, tab to desktops, laptops etc.

Advantages of bootstrap

- Easier and faster web development
- save lots of time
- Responsive features
- Easy to use

<https://getbootstrap.com/>

 [Docs](#) [Examples](#) [Icons](#) [Themes](#) [Blog](#)

   v5.3 

New in v5.3 Color mode support, expanded color palette, and more!



Build fast, responsive sites with Bootstrap

Powerful, extensible, and feature-packed frontend toolkit. Build and customize with Sass, utilize prebuilt grid system and components, and bring projects to life with powerful JavaScript plugins.

```
$ npm i bootstrap@5.3.0
```



 Read the docs

Currently **v5.3.0** · [Download](#) · [v4.6.x docs](#) · [All releases](#)



New in v5.3

Color mode support, expanded color palette, and more!

Build fast, responsive sites with Bootstrap

Powerful, extensible, and feature-packed frontend toolkit. Build and customize with Sass, utilize prebuilt grid system and components, and bring projects to life with powerful JavaScript plugins.

\$ npm i bootstrap@5.3.0

 Read the docs

Currently v5.3.0 · [Download](#) · [v4.6.x docs](#) · [All releases](#)

 **Adobe Stock**

Get 10 Free Images From Adobe Stock. Start Now.

ads via Carbon

<!DOCTYPE html>

div.col-md-8.mx-auto.text-center

Styles Computed Layout >>

Filter :hov .cls + 🖨️ 📏

```
element.style {  
}  
  
.text-center {  _utilities.scss:74  
  text-align: center!important;  
}  
  
.mx-auto {  _utilities.scss:74  
  margin-right: auto!important;  
  margin-left: auto!important;  
}  
  
*, ::after,  _reboot.scss:19  
::before {  
  box-sizing: border-box;  
}  
  
div {  user agent stylesheet  
  display: block;  
}
```

Inherited from ...

Console What's New ✕

top 🔍 ⚙️

Filter

Default levels ▾ 1 Issue: 1

```
<div class="container-xxl bd-gutter">
  <div class="col-md-8 mx-auto text-center">...</div> == $0
```

```
< .masthead.mb-3 div.container-xxl.bd-gutter div.col-md-8.mx-auto.text-center
```

```
element.style {
}
```


```
.text-center {
  text-align: center!important;
}
_utilities.scss:74
```

```
.mx-auto {
  margin-right: auto!important;
  margin-left: auto!important;
}
_utilities.scss:74
```

```
@media (min-width: 768px)
.col-md-8 {
  flex: 0 0 auto; ⓘ
  width: 66.66666667%;
}
_grid.scss:32
```

```
*, ::after, ::before {
  box-sizing: border-box;
}
_reboot.scss:19
```

```
div {
}
user-agent stylesheet
```

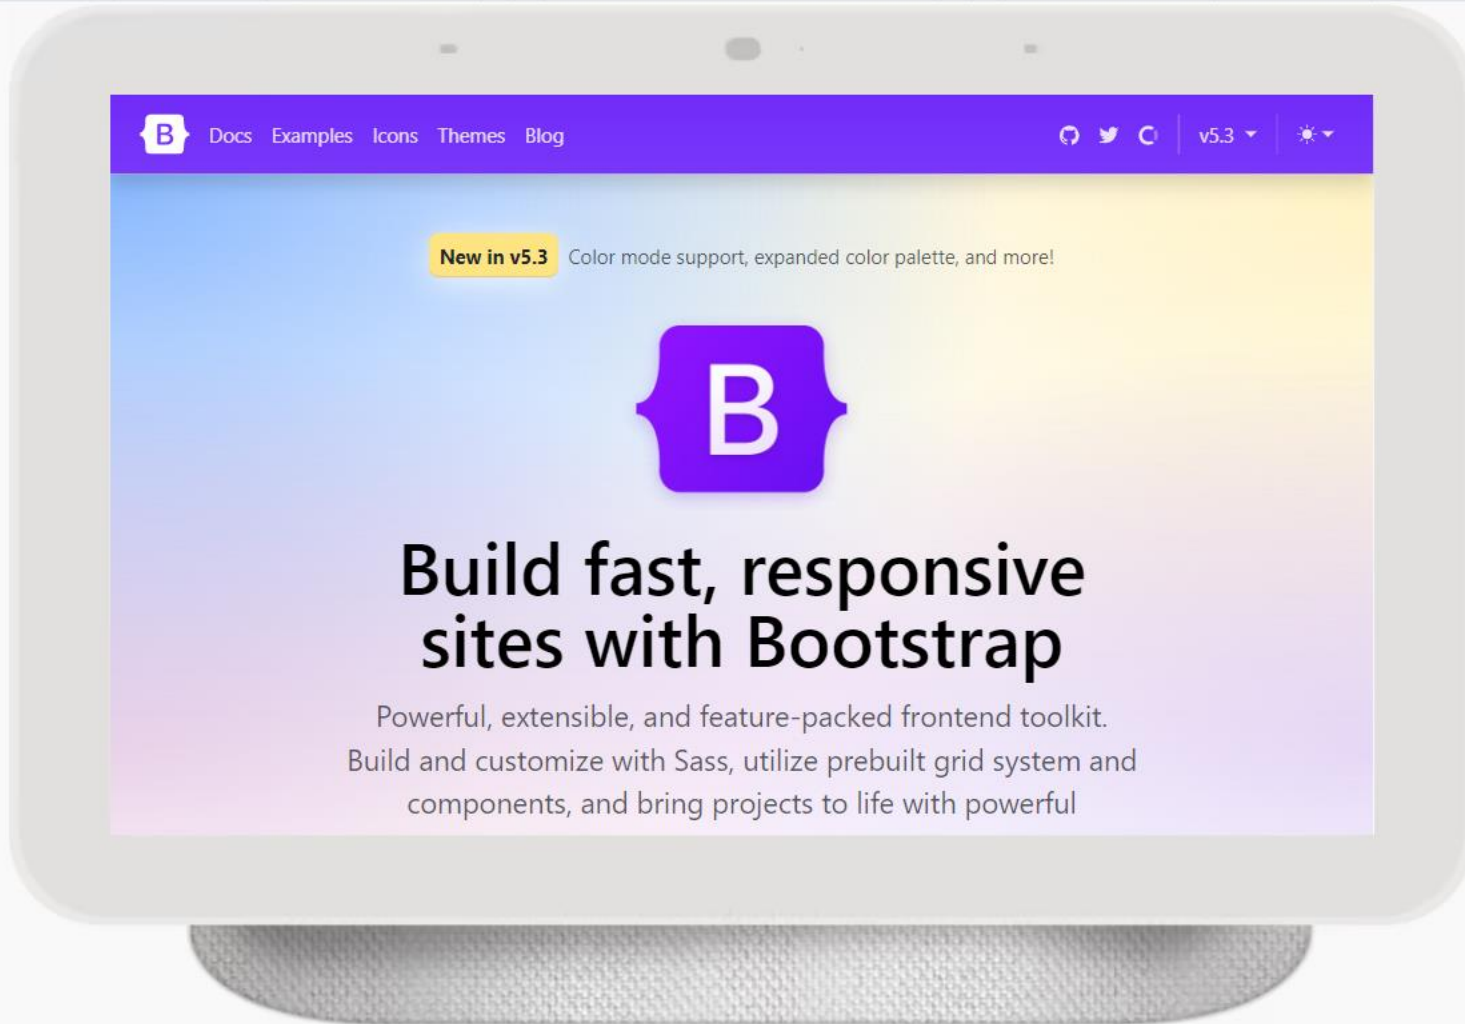

Bootstrap

There are two ways to use Bootstrap on your own web site.

- Download Bootstrap from getbootstrap.com
or
- Include Bootstrap from a CDN

Getting started

Introduction

Download

Contents

Browsers & devices

JavaScript

Webpack

Parcel

Vite

Accessibility

RFS

RTL

Contribute

Customize

Overview

Sass

Options

Color

Color modes

Components

CSS variables

Optimize

Download

[View on GitHub](#)

Download Bootstrap to get the compiled CSS and JavaScript, source code, or include it with your favorite package managers like npm, RubyGems, and more.



Get 10 Free Images From Adobe Stock.
Start Now.

ads via Carbon

Compiled CSS and JS

Download ready-to-use compiled code for **Bootstrap v5.3.0** to easily drop into your project, which includes:

- Compiled and minified CSS bundles (see [CSS files comparison](#))
- Compiled and minified JavaScript plugins (see [JS files comparison](#))

This doesn't include documentation, source files, or any optional JavaScript dependencies like Popper.

Download

Source files

On this page

Compiled CSS and JS

Source files

Examples

CDN via jsDelivr

Package managers

npm

yarn

RubyGems

Composer

NuGet

Getting started

Introduction

- Download
- Contents
- Browsers & devices
- JavaScript
- Webpack
- Parcel
- Vite
- Accessibility
- RFS
- RTL
- Contribute

Customize

- Overview
- Sass
- Options
- Color
- Color modes
- Components
- CSS variables
- Optimize

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>Bootstrap demo</title>
  </head>
  <body>
    <h1>Hello, world!</h1>
  </body>
</html>
```

2. **Include Bootstrap's CSS and JS.** Place the `<link>` tag in the `<head>` for our CSS, and the `<script>` tag for our JavaScript bundle (including Popper for positioning dropdowns, poppers, and tooltips) before the closing `</body>`. Learn more about our [CDN links](#).

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>Bootstrap demo</title>
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css" rel="stylesheet">
  </head>
  <body>
    <h1>Hello, world!</h1>
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>
  </body>
</html>
```

On this page

- Quick start
- CDN links
- Next steps
- JS components
- Important globals
 - HTML5 doctype
 - Viewport meta
 - Box-sizing
 - Reboot
- Community

Breakpoints

getbootstrap.com/docs/5.0/layout/breakpoints/

There's a newer version of Bootstrap!

B

Home Docs Examples Icons Themes Blog

Download

Search docs...Ctrl + /

Bootstrap v5.0

> Getting started

> Customize

> Layout

Breakpoints

ContainersGridColumnsGuttersUtilitiesZ-index

> Content

> Forms

> Components

> Helpers

> Utilities

> Extend

> About

Breakpoints

Breakpoints are customizable widths that determine how your responsive layout behaves across device or viewport sizes in Bootstrap.

St Adobe Stock



Get 10 free Adobe Stock photos. Start downloading amazing royalty-free stock photos today.
ads via Carbon

Core concepts

- **Breakpoints are the building blocks of responsive design.** Use them to control when your layout can be adapted at a particular viewport or device size.
- **Use media queries to architect your CSS by breakpoint.** Media queries are a feature of CSS that allow you to conditionally apply styles based on a set of browser and operating system parameters. We most commonly use `min-width` in our media queries.

View on GitHub

On this page

Core concepts

Available breakpoints

Media queries

- Min-width
- Max-width
- Single breakpoint
- Between breakpoints

Layout-Breakpoints

- Breakpoints are customizable widths that determine how your responsive layout behaves across device or viewport sizes in Bootstrap.
- **Breakpoints are the building blocks of responsive design.** Use them to control when your layout can be adapted at a particular viewport or device size.

Available breakpoints

Bootstrap includes six default breakpoints, sometimes referred to as *grid tiers*, for building responsively.

Breakpoint	Class infix	Dimensions
Extra small	<i>None</i>	<576px
Small	<code>sm</code>	≥576px
Medium	<code>md</code>	≥768px
Large	<code>lg</code>	≥992px
Extra large	<code>xl</code>	≥1200px
Extra extra large	<code>xxl</code>	≥1400px

Each breakpoint was chosen to comfortably hold containers whose widths are multiples of 12. Breakpoints are also representative of a subset of common device sizes and viewport dimensions—they don't specifically target every use case or device. Instead, the ranges provide a strong and consistent foundation to build on for nearly any device.

Layout-Containers

Containers are a fundamental building block of Bootstrap that contain, pad, and align your content within a given device or viewport.

The container class is used to create boxed content.

There are three container classes in Bootstrap:

- Container
- .container-{breakpoint}
- container-fluid

Containers

Container class--which sets a max-width at each responsive breakpoint.

Our default .container class is a responsive, fixed-width container, meaning its max-width changes at each breakpoint.

.container-{breakpoint}

.container-{breakpoint}-which is width: 100% until the specified breakpoint

➤ .container-sm

➤ .container-md

➤ .container-lg

➤ .container-xl

➤ .container-xxl

.container-{breakpoint}

- `<div class="container-sm">Wide for small breakpoint</div>`
- `<div class="container-md">Wide for medium breakpoint</div>`
- `<div class="container-lg">Wide for large breakpoint</div>`
- `<div class="container-xl">Wide for extra large breakpoint</div>`
- `<div class="container-xxl">Wide for extra large breakpoint</div>`

container-fluid

container-fluid--its width is 100% at all breakpoints,spanning the entire width of the viewport

Layout-Grid system

Bootstrap's grid system uses a series of containers, rows, and columns to layout and align content. It's built with flexbox and is fully responsive.

Main parts of the bootstrap grid system are:

- Containers
- Rows
- Columns

Bootstrap Grid System

The Bootstrap Grid System allows up to 12 columns across the page. You can use all 12 columns individually or you can group the columns together to create wider columns.

Bootstrap Grid System

```
<div class="container">
```

```
<div class="row">
```

```
1
```

```
2
```

```
3
```

```
4
```

```
5
```

```
6
```

```
7
```

```
8
```

```
9
```

```
10
```

```
11
```

```
12
```

Grid options

Bootstrap's grid system can adapt across all six default breakpoints, and any breakpoints you customize. The six default grid tiers are as follows:

- Extra small (xs)
- Small (sm)
- Medium (md)
- Large (lg)
- Extra large (xl)
- Extra extra large (xxl)

As noted above, each of these breakpoints have their own container, unique class prefix, and modifiers. Here's how the grid changes across these breakpoints:

	xs <576px	sm ≥576px	md ≥768px	lg ≥992px	xl ≥1200px	xxl ≥1400px
Container max-width	None (auto)	540px	720px	960px	1140px	1320px
Class prefix	.col-	.col-sm-	.col-md-	.col-lg-	.col-xl-	.col-xxl-
# of columns	12					

Bootstrap Grid System

- Column with fixed width
- Column with equal width
- column with specified no-of columns
- column - with break points

Colors

By using utility classes you can change the color of the Text and Backgrounds

- Text colors
- Background colors
- `<h1 class="text-primary">Learn Bootstrap</h1>`
- `<h1 class="text-primary bg-dark">Learn Bootstrap</h1>`

[Docs](#)[Examples](#)[Icons](#)[Themes](#)[Blog](#)[Utilities](#)[CTRL K](#)[v5.3](#)[Ratio](#)[Stacks](#)[Stretched link](#)[Text truncation](#)[Vertical rule](#)[Visually hidden](#)**{*} Utilities**[API](#)[Background](#)[Borders](#)**Colors**[Display](#)[Flex](#)[Float](#)[Interactions](#)[Link](#)[Object fit](#)[Opacity](#)[Overflow](#)[Position](#)[Shadows](#)[Sizing](#)

Color utilities like `.text-*` that generated from our original `$theme-colors` Sass map don't yet respond to color modes, however, any `.text-*-emphasis` utility will. This will be resolved in v6.

`.text-primary``.text-primary-emphasis``.text-secondary``.text-secondary-emphasis``.text-success``.text-success-emphasis``.text-danger``.text-danger-emphasis``.text-warning``.text-warning-emphasis``.text-info``.text-info-emphasis``.text-light``.text-light-emphasis`

On this page

[Colors](#)[Opacity](#)[How it works](#)[Example](#)[Specificity](#)[CSS](#)[Sass variables](#)[Sass maps](#)[Sass utilities API](#)

- Icon link
- Position
- Ratio
- Stacks
- Stretched link
- Text truncation
- Vertical rule
- Visually hidden

- Utilities
 - API
 - Background
 - Borders
 - Colors
 - Display
 - Flex
 - Float
 - Interactions
 - Link
 - Object fit
 - Opacity
 - Overflow
 - Position

Background color

Similar to the contextual text color classes, set the background of an element to any contextual class. Background utilities **do not set color**, so in some cases you'll want to use `.text-*` [color utilities](#).

Background utilities like `.bg-*` that generated from our original `$theme-colors` Sass map don't yet respond to color modes, however, any `.bg-*`-`subtle` utility will. This will be resolved in v6.

`.bg-primary`

`.bg-primary-subtle`

`.bg-secondary`

`.bg-secondary-subtle`

`.bg-success`

`.bg-success-subtle`

`.bg-danger`

On this page

- Background color
- Background gradient
- Opacity
 - How it works
 - Example
- CSS
 - Sass variables
 - Sass maps
 - Sass mixins
 - Sass utilities API

Border

Use border utilities to add or remove an element's borders. Choose from all borders or one at a time.

Border Classes

- Additive -Add borders to custom elements
- Subtractive -Or remove borders
- Color
- Width
- Radius -Add classes to an element to easily round its corners.

Additive Border Classes:


- .border : This class adds a border all around the element.
- .border-top : This class adds a border on the top edge of the element.
- .border-start : This class adds a border on the left edge of the element.
- .border-end : This class adds a border on the right of the element.
- .border-bottom : This class adds a border on the bottom of the element.

Subtractive Border Classes:

- .border-0 : This class removes border from all around the element if exists.
- .border-top-0 : This class removes the border from the top edge of the element if exists.
- .border-end-0 : This class removes the border from the right of the element if exists.
- .border-bottom-0 : This class removes the border from the bottom of the element if exists.
- .border-start-0 : This class removes the border from the left edge of the element if exists.

- Position
- Ratio
- Stacks
- Stretched link
- Text truncation
- Vertical rule
- Visually hidden

- Utilities
 - API
 - Background
 - Borders**
 - Colors
 - Display
 - Flex
 - Float
 - Interactions
 - Link
 - Object fit
 - Opacity
 - Overflow
 - Position
 - Shadows



Get 10 Free Images From Adobe Stock. Start Now.
ads via Carbon

Border

Use border utilities to add or remove an element's borders. Choose from all borders or one at a time.

Additive

Add borders to custom elements:



HTML

```
<span class="border"></span>  
<span class="border-top"></span>  
<span class="border-end"></span>  
<span class="border-bottom"></span>  
<span class="border-start"></span>
```

On this page

Border

- Additive
- Subtractive
- Color
- Opacity
- How it works
- Example
- Width
- Radius
- Sizes
- CSS
 - Variables
 - Sass variables
 - Sass maps
 - Sass mixins
 - Sass utilities API

Border-Width

Border width classes

- border border-1
- border border-2
- border border-3
- border border-4
- border border-5

Border Radius

- rounded
- rounded-top
- rounded-end
- rounded-bottom
- rounded-start
- rounded-circle
- rounded-pill

Spacing

Margin & Padding

Assign responsive-friendly margin or padding values to an element or a subset of its sides with shorthand classes. Includes support for individual properties, all properties, and vertical and horizontal properties.

- m - for classes that set margin
- p - for classes that set padding

example:

- margin-top-4 ---- mt-4
- padding-5 ---- pt-5

Where sides is one of:

- t - for classes that set margin-top or padding-top
- b - for classes that set margin-bottom or padding-bottom
- s - (start) for classes that set margin-left
- e - (end) for classes that set margin-right
- x - for classes that set both *-left and *-right
- y - for classes that set both *-top and *-bottom
- blank - for classes that set a margin or padding on all 4 sides of the element

Where size is one of:

- 0 - for classes that eliminate the margin or padding by setting it to 0
- 1 - (by default) for classes that set the margin or padding
- 2 - (by default) for classes that set the margin or padding
- 3 - (by default) for classes that set the margin or padding
- 4 - (by default) for classes that set the margin or padding
- 5 - (by default) for classes that set the margin or padding
- auto - for classes that set the margin to auto

Visually hidden

{*} Utilities

API

Background

Borders

Colors

Display

Flex

Float

Interactions

Link

Object fit

Opacity

Overflow

Position

Shadows

Sizing

Spacing

Text

Vertical align

Visibility

Z-index

Spacing

[View on GitHub](#)

Bootstrap includes a wide range of shorthand responsive margin, padding, and gap utility classes to modify an element's appearance.



Adobe Creative Cloud for Teams. Put creativity to work.

ads via Carbon

On this page

Margin and padding

Notation

Examples

Horizontal centering

Negative margin

Gap

row-gap

column-gap

CSS

Sass maps

Sass utilities API

Margin and padding

Assign responsive-friendly **margin** or **padding** values to an element or a subset of its sides with shorthand classes. Includes support for individual properties, all properties, and vertical and horizontal properties. Classes are built from a default Sass map ranging from **.25rem** to **3rem**.

Using the CSS Grid layout module? Consider using [the gap utility](#) instead.

Notation

Spacing utilities that apply to all breakpoints, from **xs** to **xxl**, have no breakpoint abbreviation in them. This is

Visually hidden

{*} Utilities

API

Background

Borders

Colors

Display

Flex

Float

Interactions

Link

Object fit

Opacity

Overflow

Position

Shadows

Sizing

Spacing

Text

Vertical align

Visibility

Z-index

Notation

Spacing utilities that apply to all breakpoints, from `xs` to `xxl`, have no breakpoint abbreviation in them. This is because those classes are applied from `min-width: 0` and up, and thus are not bound by a media query. The remaining breakpoints, however, do include a breakpoint abbreviation.

The classes are named using the format `{property}{sides}-{size}` for `xs` and `{property}{sides}-{breakpoint}-{size}` for `sm`, `md`, `lg`, `xl`, and `xxl`.

Where *property* is one of:

- `m` - for classes that set `margin`
- `p` - for classes that set `padding`

Where *sides* is one of:

- `t` - for classes that set `margin-top` or `padding-top`
- `b` - for classes that set `margin-bottom` or `padding-bottom`
- `s` - (start) for classes that set `margin-left` or `padding-left` in LTR, `margin-right` or `padding-right` in RTL
- `e` - (end) for classes that set `margin-right` or `padding-right` in LTR, `margin-left` or `padding-left` in RTL
- `x` - for classes that set both `*-left` and `*-right`
- `y` - for classes that set both `*-top` and `*-bottom`
- blank - for classes that set a `margin` or `padding` on all 4 sides of the element

Where *size* is one of:

- `0` - for classes that eliminate the `margin` or `padding` by setting it to `0`
- `1` - (by default) for classes that set the `margin` or `padding` to `$spacer * .25`
- `2` - (by default) for classes that set the `margin` or `padding` to `$spacer * .5`

On this page

Margin and padding

Notation

Examples

Horizontal centering

Negative margin

Gap

row-gap

column-gap

CSS

Sass maps

Sass utilities API

Text

- Text alignment
- Text wrapping
- Text transform
- Font size
- Font weight
- Text decoration

Vertical rule
Visually hidden

Utilities

API
Background
Borders
Colors
Display
Flex
Float
Interactions
Link
Object fit
Opacity
Overflow
Position
Shadows
Sizing
Spacing
Text
Vertical align
Visibility

Text

View on GitHub

Documentation and examples for common text utilities to control alignment, wrapping, weight, and more.



Adobe Creative Cloud for Teams. Put creativity to work.
ads via Carbon

On this page

Text alignment

Text wrapping and overflow
Word break
Text transform
Font size
Font weight and italics
Line height
Monospace
Reset color
Text decoration
CSS
Sass variables
Sass maps
Sass utilities API

Text alignment

Easily realign text to components with text alignment classes. For start, end, and center alignment, responsive classes are available that use the same viewport width breakpoints as the grid system.

Start aligned text on all viewport sizes.

Center aligned text on all viewport sizes.


End aligned text on all viewport sizes.

Start aligned text on viewports sized SM (small) or wider.


Start aligned text on viewports sized MD (medium) or wider.

Sizing:Height & Width

- Easily make an element as wide or as tall with our width and height utilities.
- Relative to the parent

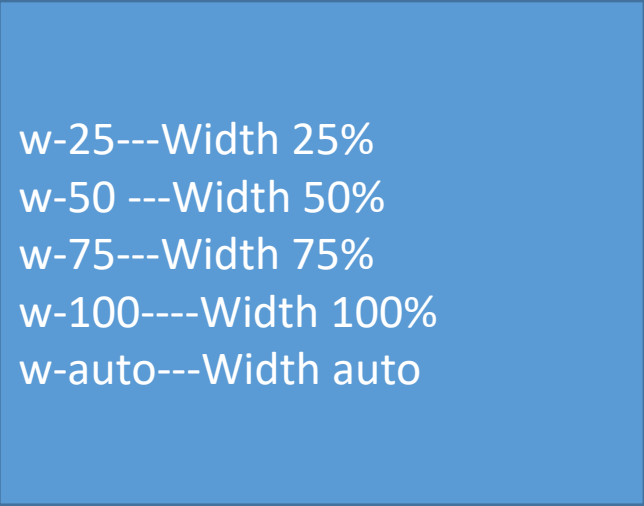

w-25---Width 25%
w-50 ---Width 50%
w-75---Width 75%
w-100----Width 100%
w-auto---Width auto

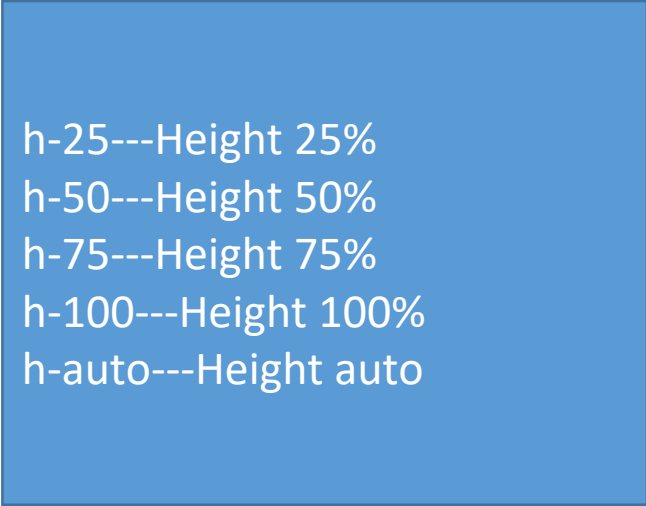

h-25---Height 25%
h-50---Height 50%
h-75---Height 75%
h-100---Height 100%
h-auto---Height auto

Sizing

[View on GitHub](#)

Easily make an element as wide or as tall with our width and height utilities.



Get 10 free Adobe Stock photos. Start downloading amazing royalty-free stock photos today.


ads via Carbon

On this page

[Relative to the parent](#)
[Relative to the viewport](#)
[CSS](#)
[Sass utilities API](#)

Relative to the parent

Width and height utilities are generated from the utility API in `_utilities.scss`. Includes support for `25%`, `50%`, `75%`, `100%`, and `auto` by default. Modify those values as you need to generate different utilities here.

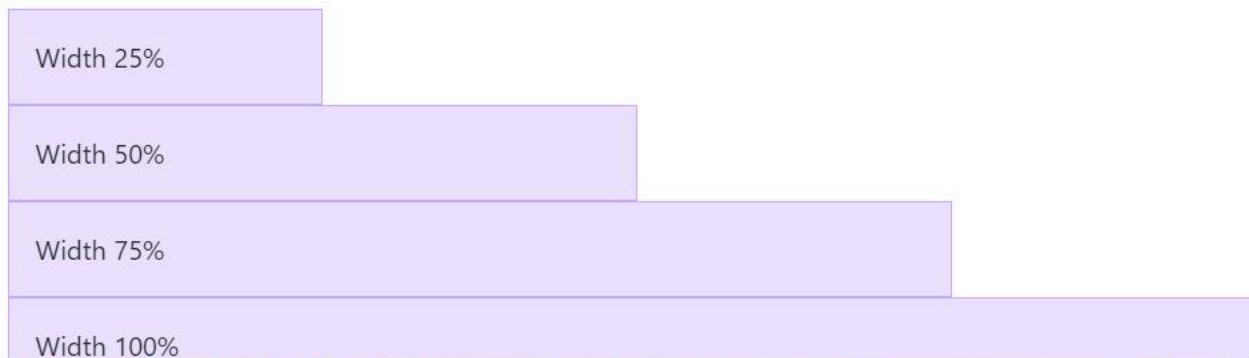

Buttons

- Base class-- .btn

Variants

- class="btn btn-primary"
- class="btn btn-secondary"
- class="btn btn-success"
- class="btn btn-danger"
- class="btn btn-warning"
- class="btn btn-info"
- class="btn btn-light"
- class="btn btn-dark"
- class="btn btn-link"

Outline buttons

- `class="btn btn-outline-primary"`
- `class="btn btn-outline-secondary"`
- `class="btn btn-outline-success"`
- `class="btn btn-outline-danger"`
- `class="btn btn-outline-warning"`

Sizes

- `class="btn btn-primary btn-lg"`
- `class="btn btn-primary btn-sm"`

Components

Buttons

[View on GitHub](#)

Use Bootstrap's custom button styles for actions in forms, dialogs, and more with support for multiple sizes, states, and more.



Get 10 Free Images From Adobe Stock.
Start Now.
ads via Carbon

Base class

Bootstrap has a base `.btn` class that sets up basic styles such as padding and content alignment. By default, `.btn` controls have a transparent border and background color, and lack any explicit focus and hover styles.

Base class

HTML

```
<button type="button" class="btn">Base class</button>
```

On this page

Base class

- Variants
- Disable text wrapping
- Button tags
- Outline buttons
- Sizes
- Disabled state
 - Link functionality caveat
- Block buttons
- Button plugin
 - Toggle states
- Methods
- CSS
 - Variables
 - Sass variables
 - Sass mixins
 - Sass loops

Alerts

- Provide contextual feedback messages for typical user actions with the handful of available and flexible alert messages.
- Alerts are available for any length of text, as well as an optional close button.
- `class="alert alert-primary" role="alert"`
- `class="alert alert-success" role="alert"`
- `class="alert alert-danger" role="alert"`

Alerts

Link color


- Use the .alert-link utility class to quickly provide matching colored links within any alert.
- [Dismissing](#)

Badges

- Badges are used to add additional information to any content:
- Example
- `<h1>Example heading <span class="badge bg-success">New</span></h1>`

Buttons

- Badges can be used as part of links or buttons to provide a counter.



Collapse

- Toggle the visibility of content across your project with a few classes and our JavaScript plugins
- The collapse JavaScript plugin is used to show and hide content.

Card

- Bootstrap's cards provide a flexible and extensible content container with multiple variants and options.
- A **card** is a flexible and extensible content container. It includes options for headers and footers, a wide variety of content, contextual background colors, and powerful display options.

Navbar

← → ↻ 🔍 getbootstrap.com/docs/5.3/components/navbar/ 📄 🔄 ⭐ ⚙️ 📁 👤 ⋮



Docs Examples Icons Themes Blog

🔍 Search

CTRL K



v5.3 ▾



Floating labels

Layout

Validation

Components

Accordion

Alerts

Badge

Breadcrumb

Buttons

Button group

Card

Carousel

Close button

Collapse

Dropdowns

List group

Modal

Navbar

Navs & tabs

Offcanvas

Pagination

Navbar

[View on GitHub](#)

Documentation and examples for Bootstrap's powerful, responsive navigation header, the navbar. Includes support for branding, navigation, and more, including support for our collapse plugin.



Adobe Creative Cloud for Teams. Put creativity to work.

ads via Carbon

How it works

Here's what you need to know before getting started with the navbar:

- Navbars require a wrapping `.navbar` with `.navbar-expand{<sm>|<md>|<lg>|<xl>|<xxl>}` for responsive collapsing and [color scheme](#) classes.
- Navbars and their contents are fluid by default. Change the [container](#) to limit their horizontal width in different ways.
- Use our [spacing](#) and [flex](#) utility classes for controlling spacing and alignment within navbars.

On this page

How it works

Supported content

Brand

Text

Image

Image and text

Nav

Forms

Text

Color schemes

Containers

Placement

Scrolling

Responsive behaviors

Toggler

External content

Offcanvas

CSS

Variables

Sass variables

Sass loops

carousel

- A slideshow component for cycling through elements—images or slides of text (slideshow)

Tables



Tables

[View on GitHub](#)

Documentation and examples for opt-in styling of tables (given their prevalent use in JavaScript plugins) with Bootstrap.



Get 10 Free Images From Adobe Stock.
Start Now.

ads via Carbon

Overview

Due to the widespread use of `<table>` elements across third-party widgets like calendars and date pickers, Bootstrap's tables are **opt-in**. Add the base class `.table` to any `<table>`, then extend with our optional modifier classes or custom styles. All table styles are not inherited in Bootstrap, meaning any nested tables can be styled independent from the parent.

Using the most basic table markup, here's how `.table`-based tables look in Bootstrap.

#	First	Last	Handle
1	Mark	Otto	@mdo

On this page

Overview

- Variants
 - Accented tables
 - Striped rows
 - Striped columns
 - Hoverable rows
 - Active tables
- How do the variants and accented tables work?
- Table borders
 - Bordered tables
 - Tables without borders
- Small tables
- Table group dividers
- Vertical alignment
- Nesting
 - How nesting works
- Anatomy
 - Table head
 - Table foot
 - Captions
- Responsive tables
 - Always responsive
 - Breakpoint specific

Icons



Opacity
Overflow
Position
Shadows
Sizing
Spacing
Text
Vertical align
Visibility
Z-index

✂️ Extend

Approach

Icons

🌐 About

Overview

Team

Brand

License

Translations

Migration

Guidance and suggestions for using external icon libraries with Bootstrap.



Get 10 Free Images From Adobe Stock.
Start Now.

ads via Carbon

While Bootstrap doesn't include an icon set by default, we do have our own comprehensive icon library called Bootstrap Icons. Feel free to use them or any other icon set in your project. We've included details for Bootstrap Icons and other preferred icon sets below.

While most icon sets include multiple file formats, we prefer SVG implementations for their improved accessibility and vector support.

Bootstrap Icons

Bootstrap Icons is a growing library of SVG icons that are designed by [@mdo](#) and maintained by [the Bootstrap Team](#). The beginnings of this icon set come from Bootstrap's very own components—our forms, carousels, and more. Bootstrap has very few icon needs out of the box, so we didn't need much. However, once we got going, we couldn't stop making more.

Oh, and did we mention they're completely open source? Licensed under MIT, just like Bootstrap, our icon set is available to everyone.

[Learn more about Bootstrap Icons](#), including how to install them and recommended usage.