Do visual-selection operations measure technical quality?

Sixteen operations plus the deployed score, a 19-extractor ablation, and end-to-end segment substitution

Redundancy cluster

Band 0:00–1:34

J. Nacional 0:00–0:51

Record 0:31–0:49

one real cluster, `catedral_notre_dame`; the deployed operation keeps the Record segment and an eligible model keeps the J. Nacional one

Scoring operation


In use: SIFT → BoVW → TF-IDF sum

designed for retrieval and categorization, not for quality

Eligible: LIQE, QualiCLIP, CLIP-IQA+

three complete-case methods clear the operational screen

Controlled-distortion database

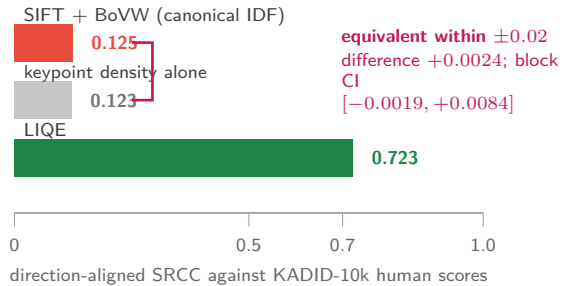

Take-away

The class, not one operation. Thirteen of the fifteen literature-derived heuristics prefer the degraded copy under white noise, and none is eligible under the screening rule.

The mechanism. The deployed score factors as $\text{score} = D \cdot \overline{\text{idf}}$, a descriptor **count** times a **mean IDF weight**; count carries the sign in 797 of the 800 pairs, and 19 CNN extractors do not repair the aggregation.

The consequence. Swapping in an eligible model changes 22 of the 42 selected segments. The three models that clear the screen are eligible *under the* [illegible]ch is a verdict and not a ranking.

Five evidence blocks

1 What the sources state → **2** Constructed truth, 800 pairs → **3** Mechanism of the deployed case → **4** Human scores on 3 databases → **5** Effect on the selections made