# PLSC 473: American Judicial Behavior

Christopher Zorn

August 27, 2015

## Software

• Preferred: R + RStudio

Viable: Stata

 Highly discouraged: SAS, SPSS/PSPP, etc.

## Accessing RStudio

- Simplest: Install and run R + RStudio locally
- Viable:
  - 1. Go here:

```
http://clc.its.psu.edu/RemoteAccess/LinuxCluster/access
```

- Install software as needed (X/cygwin for Windows, X11/XQuartz for OS-X)
- 3. Start up the X-window software, and open a session to lxcluster.tlt.psu.edu
- 4. When logged in, type "rstudio" at the command prompt.

#### Harder:

- 1. Secure an account on Hammer
- 2. Install the ExceedonDemand client
- 3. Run Rstudio in the EoD client window



R version 3.2.1 (2015-06-18) -- "World-Famous Astronaut" Copyright (C) 2015 The R Foundation for Statistical Computing Platform: x86\_64-apple-darwin13.4.0 (64-bit)

R is free software and comes with ABSOLUTELY NO WARRANTY. You are welcome to redistribute it under certain conditions. Type 'license()' or 'licence()' for distribution details.

Natural language support but running in an English locale

R is a collaborative project with many contributors. Type 'contributors()' for more information and 'citation()' on how to cite R or R packages in publications.


Type 'demo()' for some demos, 'help()' for on-line help, or 'help.start()' for an HTML browser interface to help.
Type 'q()' to quit R.

[R.app GUI 1.66 (6956) x86\_64-apple-darwin13.4.0]


[History restored from /Users/ChristopherZorn/.Rapp.history]

>

#### **RStudio**

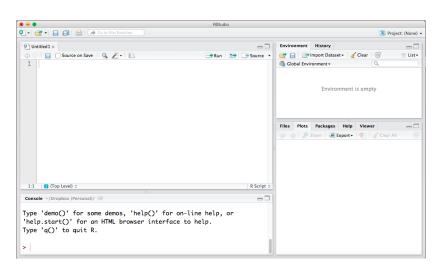

# RStudio (annotated)

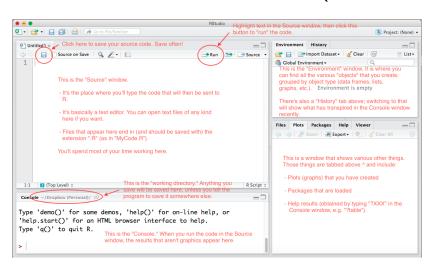

## Inside the Source Window

This:

> table(df\$X)

... means "Type the phrase 'table(df\$X)' on the command line," or – equivalently – "Type the phrase 'table(df\$X)' into your Source code, and then run it."

## Inside the Source Window

#### More often, you'll see:

```
with(df, plot(Y~X,pch=19,col="red")) # draw a scatterplot
abline(h=0,lty=2) # add a horizontal line at zero
abline(v=0,lty=2) # add a vertical line at zero
text(df$X,df$Y,labels=df$names,pos=1) # add labels
```

... which means "Put this block of text into your Source code, and then run it."

#### Note:

- R / RStudio ignores line breaks
- Anything to the right of a "#" is a comment

#### Examples...

(see PLSC473-Second-Day-Software.R)

# Help For Learning R(Studio)

In rough order of preference:

- Quick-R (http://www.statmethods.net/)
- Statistics with R
- The "Level-Zero" R Tutorial (doesn't integrate RStudio, but is otherwise very good)
- The Do It Yourself Introduction to R
- Also be sure to consult the PLSC 473 "Useful R Resources" guide (under "Resources" on GitHub.