RAJALAKSHMI ENGINEERING COLLEGE

RAJALAKSHMI NAGAR, THANDALAM – 602 105



Laboratory Record

Name : .**PRITHIKSHA R** .....

Year / Branch / Section : **II / Computer Science and Design / A** .....

Register No. :**251701043** .....

Semester :**III** .....

Academic Year : . .**2026-2027** .....

RAJALAKSHMI ENGINEERING COLLEGE

THANDALAM – 602 105.

BONAFIDE CERTIFICATE

NAME PRITHIKSHA R .....

ACADEMIC YEAR 2026-2027 SEMESTER III BRANCH Computer Science and Design

UNIVERSITY REGISTER NO. 2116251701043

Certified that this is the bonafide work done by the above student in the ..... Laboratory during the year 2026 – 2027.

Signature of Faculty – in – Charge

Submitted for the Practical Examination held on .....

INDEX

Reg. No. : 2116251701043 Name : PRITHIKSHA R

Year : II Branch : CSD Sec : A

S. No.	Date	Title	Page No.	Teacher's Signature / Remarks
1	27-07-2026	Week-01-MCQ-Variables, Datatypes and Operators	4	
2	27-07-2026	Week-01-Coding-Variables, Datatypes and Operators	12	
3	31-07-2026	Week-01-Extra	28	
4	03-08-2026	Week-02-MCQ-Selection Control	44	
5	03-08-2026	Week-02-Coding-Selection Control	53	
6	04-08-2026	Week-02-Coding-Selection Control (Extra)	73	
7	08-08-2026	Week-03-MCQ-Iteration Control	83	
8	06-08-2026	Week-03-Coding-Iteration Control	90	
9	08-08-2026	Week-03-Coding-Iteration Control (Extra)	108	
10	20-08-2026	Week-04-MCQ-Functions-Built-in, User-defined, Recursion	126	
11	19-08-2026	Week-04-Coding-Functions-User-defined	130	
12	27-08-2026	Week-04-Coding-Functions-Recursion	139	
13	28-08-2026	Week-05-MCQ-Strings	148	
14	31-08-2026	Week-05-Coding-Strings	155	
15	30-09-2026	Week-06-MCQ-Lists	171	
16	30-09-2026	Week-06-Coding-Lists	174	
17	05-10-2026	Week-07-MCQ-Tuples and Sets	196	
18	05-10-2026	Week-07-Coding-Tuples and Sets	202	
19	07-10-2026	Week-07-Coding-Tuples and Sets (Extra)	221	
20	09-10-2026	Week-08-MCQ-Dictionary	232	
21	09-10-2026	Week-08-Coding-Dictionary	237	
22	09-10-2026	Week-09-MCQ-Files	258	
23	09-10-2026	Week-09-Coding-Files	263	

Started on	Friday, 24 July 2026, 2:37 PM
State	Finished
Completed on	Thursday, 30 July 2026, 7:53 PM
Time taken	6 days 5 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Justin is a carpenter who works on an hourly basis. He works in a company where he is paid Rs 50 for an hour on weekdays and Rs 80 for an hour on weekends. He works 10 hrs more on weekdays than weekends. If the salary paid for him is given, write a program to find the number of hours he has worked on weekdays and weekends.

Hint:

If the final result(hrs) are in -ve convert that to +ve using abs() function

The `abs()` function returns the absolute value of the given number.

```
number = -20
absolute_number = abs(number)
print(absolute_number)
# Output: 20
```

Sample Input:

450

Sample Output:

weekdays 10.38

weekend 0.38

For example:

Input	Result
450	weekdays 10.38 weekend 0.38

Answer: (penalty regime: 0 %)

```
salary=float(input())

we=(salary-500)/130
we=abs(we)
wd=we+10
print(f"weekdays {wd:.2f}")
print(f"weekend {we:.2f}")
```

	Input	Expected	Got	
✔	450	weekdays 10.38 weekend 0.38	weekdays 10.38 weekend 0.38	✔

	Input	Expected	Got	
✔	500	weekdays 10.00 weekend 0.00	weekdays 10.00 weekend 0.00	✔
✔	10000	weekdays 83.08 weekend 73.08	weekdays 83.08 weekend 73.08	✔
✔	6789	weekdays 58.38 weekend 48.38	weekdays 58.38 weekend 48.38	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Write a program that returns the last digit of the given number. Last digit is being referred to the least significant digit i.e. the digit in the ones (units) place in the given number.

The last digit should be returned as a positive number.

For example,

if the given number is 197, the last digit is 7

if the given number is -197, the last digit is 7

For example:

Input	Result
197	7
-197	7

Answer: (penalty regime: 0 %)

```
n=int(input())
d=abs(n)%10
print(d)

```

	Input	Expected	Got	
✔	197	7	7	✔
✔	-197	7	7	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Write a program to convert strings to an integer and float and display its type.

Sample Input:

10

10.9

Sample Output:

10,<class 'int'>

10.9,<class 'float'>

For example:

Input	Result
10 10.9	10,<class 'int'> 10.9,<class 'float'>

Answer: (penalty regime: 0 %)

```
data = eval(input())
d2=eval(input())
print(f"{data},{type(data)}")
print(f"{d2:.1f},{type(d2)}")
```

	Input	Expected	Got	
✔	10 10.9	10,<class 'int'> 10.9,<class 'float'>	10,<class 'int'> 10.9,<class 'float'>	✔
✔	12 12.5	12,<class 'int'> 12.5,<class 'float'>	12,<class 'int'> 12.5,<class 'float'>	✔
✔	89 7.56	89,<class 'int'> 7.6,<class 'float'>	89,<class 'int'> 7.6,<class 'float'>	✔
✔	55000 56.2	55000,<class 'int'> 56.2,<class 'float'>	55000,<class 'int'> 56.2,<class 'float'>	✔
✔	2541 2541.679	2541,<class 'int'> 2541.7,<class 'float'>	2541,<class 'int'> 2541.7,<class 'float'>	✔

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

In a Lab 36% are Dell and 34% Lennovo and 28% are Acer and 2% are Samsung. write a python code to print total systems and brand wise count in the specific format using sep operator.

input: 150

output: Total System:150

Dell:54

Lennovo:51

Acer:42

Samsung:3

For example:

Input	Result
150	Total System:150 Dell:54 Lennovo:51 Acer:42 Samsung:3
250	Total System:250 Dell:90 Lennovo:85 Acer:70 Samsung:5

Answer: (penalty regime: 0 %)

```
n=float(input())
Dell=(0.36*n)
Lennovo=(0.34*n)
Acer=(0.28*n)
Samsung=(0.02*n)
total_system = (Dell+Lennovo+Acer+Samsung)
print(f"Total System:{int(total_system)}")
print(f"Dell:{int(Dell)}")
print(f"Lennovo:{int(Lennovo)}")
print(f"Acer:{int(Acer)}")
print(f"Samsung:{int(Samsung)}")
```

	Input	Expected	Got	
✔	150	Total System:150 Dell:54 Lennovo:51 Acer:42 Samsung:3	Total System:150 Dell:54 Lennovo:51 Acer:42 Samsung:3	✔

Passed all tests!

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Write a program that returns the second last digit of the given number. Second last digit is being referred 10the digit in the tens place in the given number.

For example, if the given number is 197, the second last digit is 9.

Note1 - The second last digit should be returned as a positive number. i.e. if the given number is -197, the second last digit is 9.

Note2 - If the given number is a single digit number, then the second last digit does not exist. In such cases, the program should return -1. i.e. if the given number is 5, the second last digit should be returned as -1

For example:

Input	Result
197	9
-197	9
5	-1

Answer: (penalty regime: 0 %)

```
a=abs(int(input()))
A=a-a%10
A=A//10
A=A%10
print(a>=10 and A or -1)
```

	Input	Expected	Got	
✔	197	9	9	✔
✔	-197	9	9	✔
✔	5	-1	-1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Alfred buys an old scooter for Rs. X and spends Rs. Y on its repairs. If he sells the scooter for Rs. Z (Z>X+Y). Write a program to help Alfred to find his gain percent. Get all the above-mentioned values through the keyboard and find the gain percent.

Input Format:

The first line contains the Rs X

The second line contains Rs Y

The third line contains Rs Z

Sample Input:

10000

250

15000

Sample Output:

46.34 is the gain percent.

For example:

Input	Result
45500 500 60000	30.43 is the gain percent.

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
c=int(input())

profit=c-(a+b)

print(f'{"%.2f"%(profit/(a+b)*100)} is the gain percent.')
```

	Input	Expected	Got	
✔	10000 250 15000	46.34 is the gain percent.	46.34 is the gain percent.	✔

	Input	Expected	Got	
✔	45500 500 60000	30.43 is the gain percent.	30.43 is the gain percent.	✔
✔	5000 0 7000	40.00 is the gain percent.	40.00 is the gain percent.	✔
✔	12500 5000 18000	2.86 is the gain percent.	2.86 is the gain percent.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

In a Logistic the Parcels to be delivered in 4 locations (1st locaion 20%, 2nd location 40%, 3rd location 30% and 4th location 10%). write a python code to find the total no. of parcels after the delivery in 2 locations . use a format() to print the no of parcels delivered in in each location

Input:

250

output:

Total Parcels is 250

1st Location 50 parcels

2nd Location 100 parcels

3rd Location 75 parcels

4th Location 25 parcels

For example:

Input	Result
250	Total Parcels is 250 1st Location 50 parcels 2nd Location 100 parcels 3rd Location 75 parcels 4th Location 25 parcels
400	Total Parcels is 400 1st Location 80 parcels 2nd Location 160 parcels 3rd Location 120 parcels 4th Location 40 parcels

Answer: (penalty regime: 0 %)

```
a=int(input())
print(f'''Total Parcels is {a}
1st Location {"%.0f"%(0.2*a)} parcels
2nd Location {"%.0f"%(0.4*a)} parcels
3rd Location {"%.0f"%(0.3*a)} parcels
4th Location {"%.0f"%(0.1*a)} parcels''')
```

	Input	Expected	Got	
✔	250	Total Parcels is 250 1st Location 50 parcels 2nd Location 100 parcels 3rd Location 75 parcels 4th Location 25 parcels	Total Parcels is 250 1st Location 50 parcels 2nd Location 100 parcels 3rd Location 75 parcels 4th Location 25 parcels	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

In many jurisdictions, a small deposit is added to drink containers to encourage people to recycle them. In one particular jurisdiction, drink containers holding one liter or less have a $0.10 deposit and drink containers holding more than one liter have a $0.25 deposit. Write a program that reads the number of containers of each size(less and more) from the user. Your program should continue by computing and displaying the refund that will be received for returning those containers. Format the output so that it includes a dollar sign and always displays exactly two decimal places.

Sample Input

10

20

Sample Output

Your total refund will be $6.00.

For example:

Input	Result
20 20	Your total refund will be $7.00.

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
print(f'Your total refund will be ${"%.2f"%(a*0.10+b*0.25)}.')
```

	Input	Expected	Got	
✔	20 20	Your total refund will be $7.00.	Your total refund will be $7.00.	✔
✔	11 22	Your total refund will be $6.60.	Your total refund will be $6.60.	✔
✔	123 200	Your total refund will be $62.30.	Your total refund will be $62.30.	✔
✔	76 38	Your total refund will be $17.10.	Your total refund will be $17.10.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Write a program to find whether the given input number is Even.

If the given number is even, the function should return 2 else it should return 1.

Note: The number passed to the program can either be negative, positive or zero. Zero should be treated as Even.

For example:

Input	Result
100	2
1001	1

Answer: (penalty regime: 0 %)

```
a=abs(int(input()))
print(a%2==0 and 2 or 1)
```

	Input	Expected	Got	
✔	100	2	2	✔
✔	1001	1	1	✔
✔	0	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

In department 54% are boys and 46% are girls and 8% are hostel (boys/girls). write a python code to print total no of boys, girls and hostel students in the specific format using modulo operator.

input: 1500

output: Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120

For example:

Input	Result
1500	Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120
1200	Total Students : 1200, Boys : 648, Girls : 552, Hostel : 96

Answer: (penalty regime: 0 %)

```
total=int(input())

boys=int(total*0.54)
girls=int(total*0.46)
hostel=int(total*0.08)


print(f"Total Students : {total}, Boys : {boys}, Girls : {girls}, Hostel : {hostel}")
```

	Input	Expected	Got	
✔	1500	Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120	Total Students : 1500, Boys : 810, Girls : 690, Hostel : 120	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 25 July 2026, 7:43 PM
State	Finished
Completed on	Saturday, 25 July 2026, 8:20 PM
Time taken	37 mins 9 secs
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 10.00 out of 10.00

Rohit wants to add the last digits of two given numbers.

For example,

If the given numbers are 267 and 154, the output should be 11.

Below is the explanation:

Last digit of the 267 is 7

Last digit of the 154 is 4

Sum of 7 and 4 = 11

Write a program to help Rohit achieve this for any given two numbers.

Note: Tile sign of the input numbers should be ignored.

i.e.

if the input numbers are 267 and 154, the sum of last two digits should be 11

if the input numbers are 267 and -154, the slim of last two digits should be 11

if the input numbers are -267 and 154, the sum of last two digits should be 11

if the input numbers are -267 and -154, the sum of last two digits should be 11

For example:

Input	Result
267 154	11
267 -154	11

Answer: (penalty regime: 0 %)

```
n1=int(input())
n2=int(input())
d1=n1%10
d2=abs(n2)%10
print(d1+d2)
```

	Input	Expected	Got	
✔	267 154	11	11	✔

	Input	Expected	Got	
✔	267 -154	11	11	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 2 | Correct Mark 10.00 out of 10.00

Note:

Dont use if-else. Operators alone must be used .

A team from the Rotract club had planned to conduct a rally to create awareness among the Coimbatore people to donate blood. They conducted the rally successfully. Many of the Coimbatore people realized it and came forward to donate their blood to nearby blood banks. The eligibility criteria for donating blood are people should be above or equal to 18 and his/ her weight should be above 40. There was a huge crowd and staff in the blood bank found it difficult to manage the crowd. So they decided to keep a system and ask the people to enter their age and weight in the system. If a person is eligible he/she will be allowed inside.

Write a program and feed it to the system to find whether a person is eligible or not.

Input Format:

Input consists of two integers that correspond to the age and weight of a person respectively.

Output Format:

Display True(IF ELIGIBLE)

Display False (if not eligible)

Sample Input

19

45

Sample Output

True

For example:

Input	Result
18 40	False

Answer: (penalty regime: 0 %)

```
age=int(input())
weight=int(input())

print(age >=18 and weight > 40)
```

	Input	Expected	Got	
✔	19 45	True	True	✔
✔	18 40	False	False	✔
✔	18 42	True	True	✔
✔	16 45	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 3 | Correct Mark 10.00 out of 10.00

You went on a tour to Ooty with your friends. As a part of the tour, you went boating with them. For the boat to remain stable, the number of people on one boat is restricted based on the weight of the people. You find that the boatman who is sailing your boat is so much greedy of money. For earning more, he takes too many people to travel in the boat at a time. So you want to check how many people can travel in the boat at a time so that the boat will not drown. Calculate the weight by considering the number of adults and number of children. Assume that an adult weighs 75 kg and children weigh 30 kg each. If the weight is normal, display Boat is stable, else display Boat will drown.

INPUT & OUTPUT FORMAT:

Input consists of 3 integers.

First input corresponds to the weight that the boat can handle.

Second input corresponds to the number of adults.

Third input corresponds to the number of children.

For example:

Input	Result
340 2 3	Boat is stable
600 7 4	Boat will drow

Answer: (penalty regime: 0 %)

```
weight=int(input())
num_of_adult=int(input())
num_of_children=int(input())

total_weight= (num_of_adult * 75) + (num_of_children * 30)

print( total_weight<=weight  and "Boat is stable " or "Boat will drow" )
```

	Input	Expected	Got	
✔	340 2 3	Boat is stable	Boat is stable	✔
✔	600 7 4	Boat will drow	Boat will drow	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 4 | Correct Mark 10.00 out of 10.00

In the 1800s, the battle of Troy was led by Hercules. He was a superstitious person. He believed that his crew can win the battle only if the total count of the weapons in hand is in multiple of 3 and the soldiers are in an even number of count. Given the total number of weapons and the soldier's count, Find whether the battle can be won or not according to Hercules's belief. If the battle can be won print True otherwise print False.

Input format:

Line 1 has the total number of weapons

Line 2 has the total number of Soldiers.

Output Format:

If the battle can be won print True otherwise print False.

Sample Input:

32

43

Sample Output:'

False

For example:

Input	Result
32 43	False

Answer: (penalty regime: 0 %)

```
num_of_weapon=int(input())
num_of_soldier=int(input())

print(num_of_weapon % 3 == 0 and num_of_soldier % 2 == 0)
```

	Input	Expected	Got	
✔	32 43	False	False	✔
✔	273 7890	True	True	✔

	Input	Expected	Got	
✔	800 4590	False	False	✔
✔	6789 32996	True	True	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 5 | Correct Mark 10.00 out of 10.00

An online retailer sells two products: widgets and gizmos. Each widget weighs 75 grams. Each gizmo weighs 112 grams. Write a program that reads the number of widgets and the number of gizmos from the user. Then your program should compute and display the total weight of the parts.

Sample Input:

10

20

Sample Output:

The total weight of all these widgets and gizmos is 2990 grams.

Answer: (penalty regime: 0 %)

```
widgets=int(input())
gizmo=int(input())

weight=(widgets * 75) + (gizmo * 112)
print(f"The total weight of all these widgets and gizmos is {weight} grams.")

```

	Input	Expected	Got	
✔	10 20	The total weight of all these widgets and gizmos is 2990 grams.	The total weight of all these widgets and gizmos is 2990 grams.	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 6 | Correct Mark 10.00 out of 10.00

Complete the program to convert days into years, month and days. (Ignoring leap year and considering 1 month is 30 days)

Sample Test Cases

Test Case 1

Input

375

Output

YEARS: 1 MONTH: 0 DAYS: 10

Test Case 2

Input

200

Output

YEARS: 0 MONTH: 6 DAYS: 20

Answer: (penalty regime: 0 %)

```
n=int(input())
year=n//365
rem_days=n%365

month=rem_days//30
days=rem_days%30

print(f"YEARS: {year} MONTH: {month} DAYS: {days}")
```

	Input	Expected	Got	
✔	375	YEARS: 1 MONTH: 0 DAYS: 10	YEARS: 1 MONTH: 0 DAYS: 10	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 7 | Correct Mark 10.00 out of 10.00

Write a simple python program to find the square root of a given floating point number. The output should be displayed with 3 decimal places.

Sample Input:

8.00

Sample Output:

2.828

For example:

Input	Result
8.00	2.828
14.00	3.742

Answer: (penalty regime: 0 %)

```
n=float(input())
square_root = n ** 0.5

print(f"{square_root:.3f}")
```

	Input	Expected	Got	
✔	8.00	2.828	2.828	✔
✔	14.00	3.742	3.742	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 8 | Correct Mark 10.00 out of 10.00

Mr.Ram has been given a problem kindly help him to solve it. The input of the program is either 0 or 1. IF 0 is the input he should display "C" if 1 is the input it should display "D".There is a constraint that Mr. Ram should use either logical operators or arithmetic operators to solve the problem, not anything else.

Hint:

Use ASCII values of C and D.

Input Format:

An integer x, 0<=x<=1. .

Output Format:

output a single character "C" or "D"depending on the value of x.

```
Input 1:
0
Output 1:
C
```

```
Input 2:
1

Output 1:
D
```

For example:

Input	Result
0	C

Answer: (penalty regime: 0 %)

```
x=int(input())
result=chr(67+x)
print(result)
```

	Input	Expected	Got	
✔	0	C	C	✔
✔	1	D	D	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 9 | Correct Mark 10.00 out of 10.00

Ramesh's basic salary is input through the keyboard. His dearness allowance is 40% of his basic salary, and his house rent allowance is 20% of his basic salary. Write a program to calculate his gross salary.

Sample Input:

10000

Sample Output:

16000

For example:

Input	Result
10000	16000

Answer: (penalty regime: 0 %)

```
basic_salary=float(input())

dearness_allowance = 0.4 * basic_salary
house_rent_allowance = 0.2 * basic_salary

gross_salary=(basic_salary+dearness_allowance+house_rent_allowance)
print(int(gross_salary))
```

	Input	Expected	Got	
✔	10000	16000	16000	✔
✔	20000	32000	32000	✔
✔	28000	44800	44800	✔
✔	5000	8000	8000	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Question 10 | Correct Mark 10.00 out of 10.00

Write a python program that takes a integer between 0 and 15 as input and displays the number of '1' s in its binary form.(Hint:use python bitwise operator.

Sample Input

3

Sample Output:

2

Explanation:

The binary representation of 3 is 011, hence there are 2 ones in it. so the output is 2.

For example:

Input	Result
3	2

Answer: (penalty regime: 0 %)

```
n=int(input())
ones_count=bin(n).count('1')
print(ones_count)
```

	Input	Expected	Got	
✔	3	2	2	✔
✔	5	2	2	✔
✔	15	4	4	✔

Passed all tests! ✔

Correct

Marks for this submission: 10.00/10.00.

Started on	Thursday, 23 July 2026, 3:58 PM
State	Finished
Completed on	Thursday, 23 July 2026, 4:18 PM
Time taken	19 mins 19 secs
Marks	10.00/15.00
Grade	**66.67** out of 100.00

Question 1 | Incorrect Mark 0.00 out of 1.00

Which among the following list of operators has the highest precedence?

```
+, -, **, %, /, <<, >>, |
```

a. %

b. |

c. <<, >> ✖

d. **

Your answer is incorrect.

The correct answer is:
**

Question 2 | Incorrect Mark 0.00 out of 1.00

Which is the following is an Arithmetic operator in Python?

1. // (floor division) operator
2. & (binary and) operator
3. ~ (navigation) operator
4. >> (right shift) operator

a. 2
b. 1
c. 3 ✖
d. 4

Your answer is incorrect.

The correct answer is:
1

Question 3 | Correct Mark 1.00 out of 1.00

Who developed the Python language?

a. Dennis Ritchie
b. Bill Gates
c. Guido Van Rossum ✔
d. Von Neumann

Your answer is correct.

The correct answer is:
Guido Van Rossum

Question 4 | Correct Mark 1.00 out of 1.00

Which of the following functions is a built-in function in python language?

a. scanf()
b. print() ✔
c. val()
d. printf()

Your answer is correct.

The correct answer is:
print()

Question 5 | Correct Mark 1.00 out of 1.00

What is the return type of the input() function?

a. Boolean
b. Integer
c. String ✔
d. Float

Your answer is correct.

The correct answer is: String

Question 6 | Correct Mark 1.00 out of 1.00

What is the output of the following expression?

```
z=2
z**=3
print(z)
```

a. 3
b. 8 ✔
c. 0
d. Error

Your answer is correct.

The correct answer is:
8

Question 7 | Correct Mark 1.00 out of 1.00

What is the value of the expression

```
print(100 / 25)
print(100//25)
```

a. 4.0 ✔
4

b. 4.0
4.00

c. 4.0
4.0

d. 4
4

Your answer is correct.

The correct answer is:
4.0
4

Question 8 | Incorrect Mark 0.00 out of 1.00

What will be the output of type("hello")?

a. <class 'float'>

b. <class 'int'> ✖

c. <class 'bool'>

d. <class 'str'>

Your answer is incorrect.

The correct answer is: <class 'str'>

Question 9 | Correct Mark 1.00 out of 1.00

In the Python statement `x = a + 6 - c-d`:

- `a` and `b` are _____
- `a + 6 - c-d` is _____

a. operands, an expression ✔

b. terms, a group

c. operands, an equation

d. operators, a statement

Your answer is correct.

The correct answer is:
operands, an expression

Question 10 | Not answered Marked out of 1.00

Type the code to get float input from the keyboard. (No need to assign to a variable)

Answer: ✖

The correct answer is: float(input())

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
print(bool(0), bool(3.14159), bool(-3), bool(1.0+1j))
```

a.
- False True False True

b.
- False True True True ✔

c.
- True True False False

d.
- True True False True

Your answer is correct.

The correct answer is:

- False True True True

Question 12 | Correct Mark 1.00 out of 1.00

What do we use to define a block of code in Python language?

a. Key

b. Parenthesis

c. Indentation ✔

d. Curly brace

Your answer is correct.

The correct answer is:
Indentation

Question 13 | Correct Mark 1.00 out of 1.00

What will be the datatype of the var in the below code snippet?

```
var = 10
print(type(var))
var = "Hello"
print(type(var))
```

a. No output

b. int and int

c. float and str

d. int and str ✔

Your answer is correct.

The correct answer is:
int and str

Question 14 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
x = 4
    y = 10

print(x % y)
```

a. 6
b. 4 ✔
c. 1
d. 10

Your answer is correct.

The correct answer is:
4

Question 15 | Incorrect Mark 0.00 out of 1.00

What will be the value of x in the following Python expression, if the result of that expression is 2?

```
x>>2
```

a. 1
b. 2 ✖
c. 8
d. 4

Your answer is incorrect.

The correct answer is:
8

Started on	Thursday, 23 July 2026, 10:35 PM
State	Finished
Completed on	Thursday, 23 July 2026, 10:45 PM
Time taken	10 mins 6 secs
Marks	14.00/15.00
Grade	**93.33** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What symbol is used for string formatting in Python using the old method?

- a. % ✔
- b. &
- c. @
- d. $

Your answer is correct.

The correct answer is: %

Question 2 | Correct Mark 1.00 out of 1.00

Which of the following is a correct syntax to output “Hello Python” in Python?

- a. echo "Hello Python"
- b. print("Hello Python") ✔
- c. print "Hello Python"
- d. echo("Hello Python")

Your answer is correct.

The correct answer is: print("Hello Python")

Question 3 | Correct Mark 1.00 out of 1.00

Which function would you use to get a Boolean value?

- a. bool() ✔
- b. str()
- c. int()
- d. float()

Your answer is correct.

The correct answer is: bool()

Question 4 | Correct Mark 1.00 out of 1.00

Which of the following is not a valid variable name in Python?

- a. **_var**
- b. **5var** ✔
- c. **var11**
- d. **var_name**

Your answer is correct.

The correct answer is:

5var

Question 5 | Correct Mark 1.00 out of 1.00

What will be the output of the following code snippet?

print(type(5 / 2))

a. int
b. str
c. obj
d. float ✔

Your answer is correct.

The correct answer is:
float

Question 6 | Correct Mark 1.00 out of 1.00

What will be the output of the following python Code-

mystring="India is my country"

print(type(mystring))

a. str
b. class str
c. 'str'
d. <class 'str'> ✔

Your answer is correct.

The correct answer is:
<class 'str'>

Question 7 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code: print 11//2?

a. 5.5

b. 5.0

c. 5 ✖

d. Error

Your answer is incorrect.

The correct answer is:
Error

Question 8 | Correct Mark 1.00 out of 1.00

Which of the following type of Python operator will only print True or False in output when we use it in our program?

a. Comparison Operator ✔

b. Assignment Operator

c. Membership Operator

d. Arithmetic Operator

Your answer is correct.

The correct answers are:

Membership Operator,

Comparison Operator

Question 9 | Correct Mark 1.00 out of 1.00

What is the order of precedence in python?

1. **Multiplication**
2. **Division**
3. **Parentheses**
4. **Addition**
5. **Exponentiation**

a. **1,5,2,4,3**

3,1,2,4,5

b. **1,2,3,4,5**

c. **3,1,2,4,5**

d. **3,5,1,2,4** ✔

Your answer is correct.

The correct answer is:

3,5,1,2,4

Question 10 | Correct Mark 1.00 out of 1.00

State the output of the following code.

```
num1 = '10'
num2 = '20'
sum = num1 + num2
print(sum)
```

- a. 10
- b. 1020 ✔
- c. 30
- d. Error

Your answer is correct.

The correct answer is:
1020

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
x = ["apple", "banana"]
y = ["apple", "banana"]
z = x
 print(x is z)
print(x is y)
print(x == y)
```

a. **True**
True
True

b. **True**
False
False

c. **True** ✔
False
True

d. **False**
False
True

Your answer is correct.

The correct answer is:
True
False
True

Question 12 | Correct Mark 1.00 out of 1.00

What will be the output of the following statement?

print(15 + 20 / 5 + 3 * 2 - 1)

a. 19.0
b. 24.0 ✔
c. 19
d. 12

Your answer is correct.

The correct answer is:
24.0

Question 13 | Correct Mark 1.00 out of 1.00

What will be the output of statement 22**2**2**

a. 65536 ✔
b. 256
c. 32768
d. 16

Your answer is correct.

The correct answer is:
65536

Question 14 | Correct Mark 1.00 out of 1.00

Which function converts a value to an integer in Python?

a. float()
b. bool()
c. str()
d. int() ✔

Your answer is correct.

The correct answer is: int()

Question 15 | Correct Mark 1.00 out of 1.00

What will be the output of the following Python code?

```
name = "vijay"
age = 31
print("My name is {} and I am {} years old.".format(name, age))
```

a. My name is "Vijay" and I am "31" years old.

b. My name is name and I am age years old.

c. My name is Vijay and I am 31 years old. ✔

d. My name is {} and I am {} years old.

Your answer is correct.

The correct answer is: My name is Vijay and I am 31 years old.

Started on	Thursday, 23 July 2026, 10:46 PM
State	Finished
Completed on	Thursday, 23 July 2026, 10:50 PM
Time taken	4 mins 19 secs
Marks	14.00/15.00
Grade	**93.33** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What is the output of the following assignment operator?

```
y = 10
x = y += 2
print(x)
```

a. 10

b. 14

c. Syntax Error ✔

d. 12

Your answer is correct.

The correct answer is:
Syntax Error

Question 2 | Correct Mark 1.00 out of 1.00

Which of the following is NOT a basic datatype in Python?

a. decimal ✔

b. float

c. int

d. str

Your answer is correct.

The correct answer is: decimal

Question 3 | Correct Mark 1.00 out of 1.00

Which of the following declarations is correct in python language?

a. xyzp = 5,000,000

b. x_y_z_p = 5,000,000

c. x y z p = 5000 6000 7000 8000 ✖

d. x,y,z,p = 5000, 6000, 7000, 8000

Your answer is correct.

The correct answer is:
x,y,z,p = 5000, 6000, 7000, 8000

Comment:

Question 4 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
x = 8
y = 2
print(x ** y)
print(x // y)
```

a. 64
0

b. 64 ✔
4

c. 64
8
4

d. 0
64

Your answer is correct.

The correct answer is:
64
4

Question 5 | Correct Mark 1.00 out of 1.00

Which function is used to print a message in Python?

- a. echo()
- b. show()
- c. display()
- d. print() ✔

Your answer is correct.

The correct answer is: print()

Question 6 | Correct Mark 1.00 out of 1.00

What is the two's complement of -44?

- a. 10110011
- b. 11101011
- c. 11010100 ✔
- d. 1011011

Your answer is correct.

The correct answer is:
11010100

Question 7 | Correct Mark 1.00 out of 1.00

Which Python method can be used to format strings?

- a. format() ✔
- b. format_string()
- c. str_format()
- d. string_format()

Your answer is correct.

The correct answer is: format()

Question 8 | Incorrect Mark 0.00 out of 1.00

Which of the following statements assigns the value 35 to the variable x in Python:

a. **int x = 35**

b. **x := 35** ✖

c. **x ← 35**

d. **x = 35**

Your answer is incorrect.

The correct answer is:

x = 35

Question 9 | Correct Mark 1.00 out of 1.00

Which one of the following is the correct extension of the Python file?

a. .python

b. .py ✔

c. .cpp

d. .p

Your answer is correct.

The correct answer is:

.py

Question 10 | Correct Mark 1.00 out of 1.00

Which function returns a floating point number?

a. float() ✔

b. str()

c. int()

d. bool()

Your answer is correct.

The correct answer is: float()

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
x = ["apple", "banana", "cherry"]
 #display the data type of x:
print(type(x))
```

a. ✔
<class 'list'>

b. **<class 'float'>**

c. **<class 'int'>**

d. **<class 'complex'>**

Your answer is correct.

The correct answer is:

<class 'list'>

Question 12 | Correct Mark 1.00 out of 1.00

What is the value of the expression `1+2**3*4+12*((100+4)*10-200//10)` ?

a. -23679

b. -24568

c. 12493

d. 12273 ✔

Your answer is correct.

The correct answer is:

12273

Question 13 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
x = 5
y = 3
print(x == y)
```

a. False ✔

b. True

c. Error

d. 5==3

Your answer is correct.

The correct answer is:
False

Question 14 | Correct Mark 1.00 out of 1.00

What is the correct syntax to create a variable in Python?

- a. name = “value” ✔
- b. var name = “value”
- c. name := “value”
- d. var name : “value”

Your answer is correct.

The correct answer is: name = “value”

Question 15 | Correct Mark 1.00 out of 1.00

Which keyword is used to write comments in Python?

- a. # ✔
- b. /*
- c. <!--
- d. //


Your answer is correct.

The correct answer is: #

Started on	Tuesday, 4 August 2026, 12:08 PM
State	Finished
Completed on	Tuesday, 4 August 2026, 12:39 PM
Time taken	31 mins 24 secs
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Write a program to determine the type of berth when the seat / berth number in the train is given.

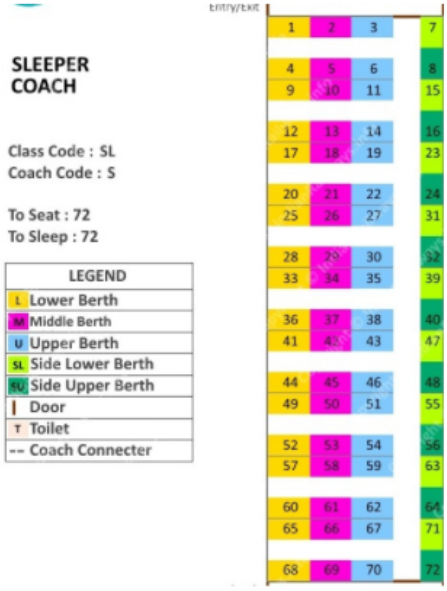

Input Format:

Input consists of a single integer. Assume that the range of input is between 1 and 72.

Output Format:

Output consists of a single string. [Upper or Middle or Lower or Side Lower or Side Upper]

Sample Input 1:

9

Sample Output 1:

Lower Berth

Answer: (penalty regime: 0 %)

```
n=int(input())
r=n%8

if r==1 or r==4:
    print("Lower Berth")
elif r==2 or r==5:
    print("Middle Berth")
elif r==3 or r==6:
    print("Upper Berth")
elif r==7:
    print("Side Lower Berth")
else:
    print("Side Upper Berth")
```

	Input	Expected	Got	
✔	9	Lower Berth	Lower Berth	✔
✔	72	Side Upper Berth	Side Upper Berth	✔
✔	20	Lower Berth	Lower Berth	✔
✔	34	Middle Berth	Middle Berth	✔
✔	39	Side Lower Berth	Side Lower Berth	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Write a Python program that accepts three parameters. The first parameter is an integer. The second is one of the following mathematical operators: +, -, /, or *. The third parameter will also be an integer.

The function should perform a calculation and return the results. For example, if the function is passed 6 and 4, it should return 24.

Sample Input Format:

11

+

14

Sample Output Format:

25

Answer: (penalty regime: 0 %)

```
n1=int(input().strip())
op=input().strip()
n2=int(input().strip())

if op == '+':
    print(n1+n2)
elif op == '-':
    print(n1-n2)
elif op == '*':
    print(n1*n2)
elif op == '/':
    print(n1/n2)
```

	Input	Expected	Got	
✔	11 + 14	25	25	✔
✔	45 - 50	-5	-5	✔
✔	12 * 100	1200	1200	✔
✔	18 / 2	9.0	9.0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

The Chinese zodiac assigns animals to years in a 12 year cycle. One 12 year cycle is shown in the table below. The pattern repeats from there, with 2012 being another year of the dragon, and 1999 being another year of the hare.

Year Animal

2000 Dragon

2001 Snake

2002 Horse

2003 Sheep

2004 Monkey

2005 Rooster

2006 Dog

2007 Pig

2008 Rat

2009 Ox

2010 Tiger

2011 Hare

Write a program that reads a year from the user and displays the animal associated with that year. Your program should work correctly for any year greater than or equal to zero, not just the ones listed in the table.

Sample Input 1

2010

Sample Output 1

2010 is the year of the Tiger.

Sample Input 2

2020

Sample Output 2

2020 is the year of the Rat.

Answer: (penalty regime: 0 %)

```
year=int(input().strip())
animals = ["Rat","Ox","Tiger","Hare","Dragon","Snake","Horse","Sheep","Monkey","Rooster","Dog","Pig"]
index = (year-2020)%12
print(f"{year} is the year of the {animals[index]}.")
```

	Input	Expected	Got	
✔	2010	2010 is the year of the Tiger.	2010 is the year of the Tiger.	✔
✔	2020	2020 is the year of the Rat.	2020 is the year of the Rat.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

A certain type of steel is used to test and give grade according to the following conditions.

1. Hardness of the steel must be greater than 50
2. Carbon content of the steel must be less than 0.7
3. Tensile strength must be greater than 5600

The grades awarded are as follows:

- Grade is 10 if all three conditions are met
- Grade is 9 if conditions (1) and (2) are met
- Grade is 8 if conditions (2) and (3) are met
- Grade is 7 if conditions (1) and (3) are met
- Grade is 6 if only one condition is met
- Grade is 5 if none of the three conditions are met

Write a program to display the grade of the steel, based on the values of hardness, carbon content and tensile strength of the steel, given by the user.

Input

53

0.6

5602

Output:

10

Answer: (penalty regime: 0 %)

```
hardness=int(input())
carbon=float(input())
tensile=int(input())

c1=hardness>50
c2=carbon<0.7
c3=tensile>5600

if c1 and c2 and c3:
    print(10)
elif c1 and c2:
    print(9)
elif c2 and c3:
    print(8)
elif c1 and c3:
    print(7)
elif c1 or c2 or c3:
    print(6)
else:
    print(5)
```

	Input	Expected	Got	
✔	53 0.6 5602	10	10	✔
✔	45 0 4500	6	6	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Most years have 365 days. However, the time required for the Earth to orbit the Sun is actually slightly more than that. As a result, an extra day, February 29, is included in some years to correct for this difference. Such years are referred to as leap years. The rules for determining whether or not a year is a leap year follow:

• Any year that is divisible by 400 is a leap year.

• Of the remaining years, any year that is divisible by 100 is not a leap year.

• Of the remaining years, any year that is divisible by 4 is a leap year.

• All other years are not leap years.

Write a program that reads a year from the user and displays a message indicating whether or not it is a leap year.

Sample Input 1

1900

Sample Output 1

1900 is not a leap year.

Sample Input 2

2000

Sample Output 2

2000 is a leap year.

Answer: (penalty regime: 0 %)

```
year=int(input())

if year % 400 == 0:
    print(f"{year} is a leap year.")
elif year % 100 == 0:
    print(f"{year} is not a leap year.")
elif year % 4 == 0:
    print(f"{year} is a leap year.")
else:
    print(f"{year} is not leap year.")
```

	Input	Expected	Got	
✔	1900	1900 is not a leap year.	1900 is not a leap year.	✔
✔	2000	2000 is a leap year.	2000 is a leap year.	✔
✔	2100	2100 is not a leap year.	2100 is not a leap year.	✔
✔	2020	2020 is a leap year.	2020 is a leap year.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Given an integer N, check whether N the given number can be made a perfect square after adding 1 to it.

Input Format:

Single integer input.

Output Format:

Yes or No.

Example Input:

24

Output:

Yes

Example Input:

26

Output:

No

For example:

Input	Result
24	Yes

Answer: (penalty regime: 0 %)

```
import math
n=int(input())
x=n+1
if int(math.isqrt(x))**2==x:
    print("Yes")
else:
      print("No")
```

	Input	Expected	Got	
✔	24	Yes	Yes	✔
✔	26	No	No	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Write a program to calculate and print the Electricity bill where the unit consumed by the user is given from test case. It prints the total amount the customer has to pay. The charge are as follows:

Unit	Charge / Unit
Upto 199	@1.20
200 and above but less than 400	@1.50
400 and above but less than 600	@1.80
600 and above	@2.00

If bill exceeds Rs.400 then a surcharge of 15% will be charged and the minimum bill should be of Rs.100/-

Sample Test Cases

Test Case 1

Input

50

Output

100.00

Test Case 2

Input

300

Output

517.50

For example:

Input	Result
100.00	120.00
500	1035.00

Answer: (penalty regime: 0 %)

```
units=float(input())

if units<=199:
    rate=1.20
elif units<400:
    rate=1.80
elif units<600:
    rate=1.80
else:
    rate=2.00

bill=units*rate
if bill>400:
    bill+=bill*0.15
if bill<100:
    bill=100.00
print(f"{bill:.2f}")
```

	Input	Expected	Got	
✔	50	100.00	100.00	✔
✔	100.00	120.00	120.00	✔
✔	500	1035.00	1035.00	✔
✔	700	1610.00	1610.00	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

A triangle can be classified based on the lengths of its sides as equilateral, isosceles or scalene. All three sides of an equilateral triangle have the same length. An isosceles triangle has two sides that are the same length, and a third side that is a different length. If all of the sides have different lengths then the triangle is scalene.

Write a program that reads the lengths of the three sides of a triangle from the user. Then display a message that states the triangle's type.

Sample Input 1

60

60

60

Sample Output 1

That's a equilateral triangle

Sample Input 2

40

40

80

Sample Output 2

That's a isosceles triangle

Sample Input 3

50

60

70

Sample Output 3

That's a scalene triangle

For example:

Input	Result
60 60 60	That's a equilateral triangle
40 40 80	That's a isosceles triangle

Answer: (penalty regime: 0 %)

```
a=int(input().strip())
b=int(input().strip())
c=int(input().strip())

if a==b and b==c:
    print("That's a equilateral triangle")
elif a==b or b==c or a==c:
    print("That's a isosceles triangle")
else:
    print("That's a scalene triangle")
```

	Input	Expected	Got	
✔	60 60 60	That's a equilateral triangle	That's a equilateral triangle	✔
✔	40 40 80	That's a isosceles triangle	That's a isosceles triangle	✔
✔	50 60 70	That's a scalene triangle	That's a scalene triangle	✔
✔	50 50 80	That's a isosceles triangle	That's a isosceles triangle	✔
✔	10 10 10	That's a equilateral triangle	That's a equilateral triangle	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Write a program that accepts 5 inputs and returns the count of how many of those 5 are odd.

For example,

If the five inputs are 12, 17, 19, 14, and 115, there are three odd numbers 17, 19 and 115. So, the program must return 3.

Similarly,

If the five inputs are 15, 0, -12, 19, and 28, there are two odd numbers 15 and 19. So, the program must return 2.

Observe that zero is considered an even number.

For example:

Input	Result
12 17 19 14 115	3
15 0 -12 19 28	2

Answer: (penalty regime: 0 %)

```
count  = 0
for i in range(5):
    n=int(input())
    if n%2 != 0:
        count+=1

print(count)

```

	Input	Expected	Got	
✔	12 17 19 14 115	3	3	✔

	Input	Expected	Got	
✔	15 0 -12 19 28	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

IN / OUT

Ms. Sita, the faculty handling programming lab for you is very strict. Your seniors have told you that she will not allow you to enter the week's lab if you have not completed atleast half the number of problems given last week. Many of you didn't understand this statement and so they requested the good programmers from your batch to write a program to find whether a student will be allowed into a week's lab given the number of problems given last week and the number of problems solved by the student in that week.

Input Format:

Input consists of 2 integers.

The first integer corresponds to the number of problems given and the second integer corresponds to the number of problems solved.

Output Format:

Output consists of the string “IN” or “OUT”.

Sample Input and Output:

Input

8

3

Output

OUT

For example:

Input	Result
8 3	OUT

Answer: (penalty regime: 0 %)

```
total=int(input())
solved=int(input())
if solved>=total/2:
    print("IN")
else:
    print("OUT")
```

	Input	Expected	Got	
✔	8 3	OUT	OUT	✔
✔	8 5	IN	IN	✔
✔	20 9	OUT	OUT	✔
✔	50 31	IN	IN	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Tuesday, 4 August 2026, 12:46 PM
State	Finished
Completed on	Thursday, 6 August 2026, 10:33 PM
Time taken	2 days 9 hours
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Samantha is a diligent math student who is exploring the world of programming. She is learning Java and has recently studied conditional statements. One day, her teacher gives her an interesting problem to solve, that takes a number as input and checks whether it is a multiple of 5 or 7.

Help her to complete the task.

Input Format :

The input consists of a single integer **N,** representing the number to be checked.

Output Format :

If the number is a multiple of 5 but not 7, the output prints "N is a multiple of 5".

If the number is a multiple of 7, the output prints "N is a multiple of 7".

Otherwise the output prints "N is neither multiple of 5 nor 7" where N is an entered integer.

For example:

Input	Result
10	10 is a multiple of 5
21	21 is a multiple of 7
37	37 is neither multiple of 5 nor 7

Answer: (penalty regime: 0 %)

```
n=int(input())

if n%5==0:
    print(f"{n} is a multiple of 5")
elif n%7==0:
    print(f"{n} is a multiple of 7")
else:
    print(f"{n} is neither multiple of 5 nor 7")
```

	Input	Expected	Got	
✔	10	10 is a multiple of 5	10 is a multiple of 5	✔
✔	21	21 is a multiple of 7	21 is a multiple of 7	✔
✔	37	37 is neither multiple of 5 nor 7	37 is neither multiple of 5 nor 7	✔
✔	8	8 is neither multiple of 5 nor 7	8 is neither multiple of 5 nor 7	✔
✔	56	56 is a multiple of 7	56 is a multiple of 7	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Alice, an insurance agent, needs a program to calculate the insurance premium for her clients based on their age and health condition.

The premium amount is determined by the following rules:

1. If the client's age is between 18 and 30 years:
2. 'excellent' health condition: 500.0
3. 'good' health condition: 700.0
4. Any other health condition: 900.0
5. If the client's age is between 31 and 50 years:
6. 'excellent' health condition: 700.0
7. 'good' health condition: 900.0
8. Any other health condition: 1100.0

Write a program that takes the age and health condition of a client as input and outputs the corresponding insurance premium.

Input Format :

The first line of input contains an integer representing the age of the client.

The second line contains a string representing the health condition of the client.

Output Format :

The output prints a double value, representing the insurance premium.

For example:

Input	Result
25 excellent	500.0
31 good	900.0
41 poor	1100.0

Answer: (penalty regime: 0 %)

```
a=int(input())
b=input()

if(a>=18 and a<=30):
    if(b == 'excellent'):
        print("500.0")
    elif(b == 'good'):
        print("700.0")
    else:
        print("900.0")

if( a>=31 and a<=50):
    if(b == 'excellent'):
        print("700.0")
    elif(b == 'good'):
        print("900.0")
    else:
        print("1100.0")
```

	Input	Expected	Got	
✔	25 excellent	500.0	500.0	✔
✔	31 good	900.0	900.0	✔
✔	41 poor	1100.0	1100.0	✔
✔	50 good	900.0	900.0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Arun is working on a project to automate the process of determining whether a student has passed or failed based on their subject marks.

He aims to create a simple program that takes positive integers as marks for five subjects from the user. If the average of the marks is greater than or equal to 50, the student has passed the exam. Else, the student has failed.

Help Arun to implement the project.

Input Format :
The input consists of five space-separated integers, representing the marks in five subjects.

Output Format :
The first line of output prints "Average score: " followed by an integer representing the average score.

The second line prints one of the following:

1. If the condition is satisfied, print "The student has passed".
2. Otherwise, the output prints "The student has failed".

For example:

Input	Result
50 60 70 80 90	Average score: 70 The student has passed
39 25 30 45 67	Average score: 41 The student has failed

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
c=int(input())
d=int(input())
e=int(input())

average=(a+b+c+d+e)/5
print(f'Average score: {int(average)}')
if(average>=50):
    print("The student has passed")
else:
    print("The student has failed")
```

	Input	Expected	Got	
✔	50 60 70 80 90	Average score: 70 The student has passed	Average score: 70 The student has passed	✔
✔	39 25 30 45 67	Average score: 41 The student has failed	Average score: 41 The student has failed	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Dinesh is developing a geometry calculator program for a Math class. He wants to write a program that allows users to calculate the area of different geometric shapes such as circles, rectangles, and triangles.

Users can select the type of shape they want to calculate the area for, and the program will perform the corresponding calculation using a 'switch-case' statement.

Formulas Used:

Area of Circle = 3.14 * radius * radius

Area of Rectangle = length * width

Area of Triangle = 0.5 * base * height

Input Format :

The first line of input consists of an integer, representing the geometric shape the user wants to calculate the area for (1 for a circle, 2 for a rectangle, and 3 for a triangle).

1. If the choice is 1, the second line of input consists of a double value **R**, representing the radius of the circle.
2. If the choice is 2, the second line and third lines of input consist of double values **L** and **B**, representing the length and width of the rectangle.
3. If the choice is 3, the second and third lines of input consist of double values **P** and **Q** representing the base and height of the triangle.

Output Format :

If the valid choice is entered, the output prints "**X sq.units**" where X represents the calculated area of the specific shape, rounded off to two decimal places.

Otherwise, the output prints "**Invalid choice**"

For example:

Input	Result
1 5.1	81.67 sq.units
2 4.3 6.1	26.23 sq.units

Answer: (penalty regime: 0 %)

```
n=int(input())

if n==1:
    radius=float(input())
    area=3.14*radius*radius
    print(f"{area:.2f} sq.units")

elif n==2:
    length=float(input())
    width=float(input())
    area=length*width
    print(f"{area:.2f} sq.units")

elif n==3:
    base=float(input())
    height=float(input())
    area=0.5*base*height
    print(f"{area:.2f} sq.units")

else:
    print("Invalid choice")
```

	Input	Expected	Got	
✔	1 5.1	81.67 sq.units	81.67 sq.units	✔
✔	2 4.3 6.1	26.23 sq.units	26.23 sq.units	✔
✔	3 3.7 5.6	10.36 sq.units	10.36 sq.units	✔
✔	4	Invalid choice	Invalid choice	✔
✔	1 9.5	283.38 sq.units	283.38 sq.units	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Bruce is working on a task that involves manipulating integers. He needs to rotate the digits of an integer to the right by one position.

Write a program to help Bruce accomplish this task.

Input Format :

The input consists of a single integer **N.**

Output Format :

The output prints the given integer with its digits rotated to the right by one position.

For example:

Input	Result
647	764

Answer: (penalty regime: 0 %)

```
n=int(input())
s=str(n)
if len(s)>1:
    rotated_str=s[-1]+s[:-1]
    result=int(rotated_str)
else:
    resilt=n

print(result)
```

	Input	Expected	Got	
✔	647	764	764	✔
✔	78436	67843	67843	✔
✔	82644	48264	48264	✔
✔	62734	46273	46273	✔
✔	2836	6283	6283	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Friday, 31 July 2026, 2:21 PM
State	Finished
Completed on	Friday, 31 July 2026, 2:35 PM
Time taken	14 mins 35 secs
Marks	7.00/15.00
Grade	**46.67** out of 100.00

Question 1 | Incorrect Mark 0.00 out of 1.00

```
x,y=1,2
if(x or y):
  print("1")
else:
  print("0")
```

a. Runtime error

b. 0 ✖

c. 1

d. Compile time error

Your answer is incorrect.

The correct answer is:
1

Question 2 | Correct Mark 1.00 out of 1.00

What keyword would you use to add an alternative condition to an if statement?

a. elif ✔

b. else if

c. elseif

Your answer is correct.

The correct answer is:
elif

Question 3 | Correct Mark 1.00 out of 1.00

choose a valid Python if statement :

- a. if a>=2 : ✔
- b. if (a => 22)
- c. if (a >= 2)

Your answer is correct.

The correct answer is:
if a>=2 :

Question 4 | Correct Mark 1.00 out of 1.00

What will be output for the following code?

```
if 3 == 3:
    print("Python is easy!")
```

- a. NO OUTPUT
- b. Python is easy! ✔
- c. Error

Your answer is correct.

The correct answer is:
Python is easy!

Question 5 | Correct Mark 1.00 out of 1.00

What will be the output?

```
a=11
b=5
if (a%b==0):
   print ( "hello")
if (a//b==0):
   print ( "hi")
else:
   print ("python")
```

a. hello

b. python ✔

c. hi

Your answer is correct.

The correct answer is:
python

Question 6 | Correct Mark 1.00 out of 1.00

Which of the following is true about the code below?

```
x = 3
if (x > 2):
    x = x * 2;
if (x > 4):
    x = 0;
print(x)
```

a. if x is greater than 2, x will equal 0 after this code executes ✔

b. if x is greater than 2, the value in x will be doubled after this code executes

c. if x is lesser then 0,x will be 0 after this code executes

d. x will always equal 0 after this code executes for any value of x

Your answer is correct.

The correct answer is:
if x is greater than 2, x will equal 0 after this code executes

Question 7 | Incorrect Mark 0.00 out of 1.00

Which among the following codes have equivalent logic?

Code 1:

```
if(value3>1000 and value3<1006):
  if(value1=="ABC"):
    if(value2=="A"):
      value4=10
    else:
      value4=8
  elif(value1=="XYZ"):
    if(value2=="A"):
      value4=8
    else:
      value4=6
print(value4)
```

Code 2:

```
if(value3>=1001 and value3<=1005 and value1=="ABC"):
    if(value2=="A"):
       value4=10
    else:
       value4=8
elif(value3>1000 and value3<1006 and value1=="XYZ"):
     if(value2=="A"):
       value4=8
     else:
       value4=6
print(value4)
```

Code 3:

```
if(value3>1000 and value3<1006 or value1=="ABC"):
   if(value2=="A"):
      value4=10
   else:
      value4=8
elif(value3>1000 and value3<1006 or  value1=="XYZ"):
   if(value2=="A"):
      value4=8
   else:
      value4=6
print(value4)
```

a. Code 2, Code 3 ✖

b. Code 1, Code 2

c. Code 1, Code 3

Your answer is incorrect.

The correct answer is:
Code 1, Code 2

Question 8 | Correct Mark 1.00 out of 1.00

what will be the output for the following question?

```
a, b = 12, 5
if a + b:
   print('True')
else:
 print('False')
```

a. False

b. Error

c. True ✔

Your answer is correct.

The correct answer is:
True

Question 9 | Incorrect Mark 0.00 out of 1.00

Can we write if/else into one line in python?

a. No ✖

b. Yes

Your answer is incorrect.

The correct answer is:
Yes

Question 10 | Incorrect Mark 0.00 out of 1.00

What is the output of the code given below?

```
a = -10
b = -200
c = 2000
d = 4000
if( a*b >=d):
    if(d>c):
        if(d%c!=0):
            print(11)
        else:
            print(22)
else:
    if(b/a >0):
        if(a<b or d%c!=0):
          print(33)
        else:
          print(44)
```

a. 11

b. 33 ✖

c. 44

d. 22

Your answer is incorrect.

The correct answer is:
44

Question 11 | Incorrect Mark 0.00 out of 1.00

What will be the output for the following code?

```
if False:
   print("1001")
else:
   print("2002")
```

a. syntax error ✖

b. 2002

c. 1001

Your answer is incorrect.

The correct answer is:
2002

Question 12 | Incorrect Mark 0.00 out of 1.00

What is the output of the following snippet if 5 is given as the input?

```
c = input("Enter a number: ")
print(c * 3)
```

a. 555

b. 8

c. 2

d. 15 ✖

Your answer is incorrect.

The correct answer is:
555

Question 13 | Incorrect Mark 0.00 out of 1.00

```
if true:
    print("Hello World")
```

a. Hello World

b. No output ✖

c. Name Error

Your answer is incorrect.

The correct answer is:
Name Error

Question 14 | Correct Mark 1.00 out of 1.00

What is the output of the following snippet?

```
s1 = "IIT "  # Remember there is a space after T in IIT
s2 = "Punjab"
s1 = s1 * 2
s2 = "Ropar"
print(s1, s2)
```

a. IIT IIT Punjab

b. IIT IIT Ropar ✔

c. IIT Ropar

d. IIT Punjab

Your answer is correct.

The correct answer is:
IIT IIT Ropar

Question 15 | Incorrect Mark 0.00 out of 1.00

selection is implemented with the help of _____ statement

a. for loop ✖

b. while loop

c. if..else

Your answer is incorrect.

The correct answer is:
if..else

Started on	Tuesday, 4 August 2026, 8:42 PM
State	Finished
Completed on	Tuesday, 4 August 2026, 8:49 PM
Time taken	7 mins
Marks	14.00/15.00
Grade	**93.33** out of 100.00

Question 1 | Incorrect Mark 0.00 out of 1.00

```
if(x=-1):
   print("present")
else:
   print("absent")
```

a. absent

b. compilation error ✖

c. present

d. Runtime Error

Your answer is incorrect.

The correct answer is:
present

Question 2 | Correct Mark 1.00 out of 1.00

What is the output of the following code snippet?

```
a = "Hi"
b = "Arjuna"
c = "Bhimaa"
print("Hi", a, b, c)
```

a. Hi Arjuna Hi Bhimaa

b. Hi Arjuna Bhimaa

c. Hi Hi Arjuna Bhimaa ✔

d. Hi Arjuna Bhimaa Hi

Your answer is correct.

The correct answer is:
Hi Hi Arjuna Bhimaa

Question 3 | Correct Mark 1.00 out of 1.00

What is the output

```
a, b, c = 1, 3, 5

if a + b + c:

    print("Hello")

else:

    print("Know Program")
```

a. Hello ✔

b. Know Program

c. Compiled Successfully, No Output.

d. Error

Your answer is correct.

The correct answer is:
Hello

Question 4 | Correct Mark 1.00 out of 1.00

____ is an empty statement in Python.

a. pass ✔

b. Empty

c. Jump

d. None

Your answer is correct.

The correct answer is:
pass

Question 5 | Correct Mark 1.00 out of 1.00

Given the nested `if-else` below, what will be the value `x` when the code executed successfully

```
x = 0
a = 5
b = 5
if a > 0:
    if b < 0:
        x = x + 5
    elif a > 5:
        x = x + 4
    else:
        x = x + 3
else:
    x = x + 2
print(x)
```

a. 3 ✔

b. 2

c. 4

d. 0

Your answer is correct.

The correct answer is:
3

Question 6 | Correct Mark 1.00 out of 1.00

What is the output when the following sequence of instructions is carried out in the console?

```
a = 1;a = a + 1;a = a + 2;a = a + 3;print(a)
```

a. 6

b. 7 ✔

c. 5

d. 4

Your answer is correct.

The correct answer is:
7

Question 7 | Correct Mark 1.00 out of 1.00

What is the output of the following code.

```
a="REC"
if a in ("rec"):
    print(a)
print(a)
```

a. REC
REC

b. false
REC

c. REC ✔

d. No output
REC

Your answer is correct.

The correct answer is:
REC

Question 8 | Correct Mark 1.00 out of 1.00

What keyword would you use to add an alternative condition to an if statement?

a. None of the above
b. else if
c. elif ✔
d. elseif

Your answer is correct.

The correct answer is:
elif

Question 9 | Correct Mark 1.00 out of 1.00

What is the output of the following code

```
x=3
if x>2 or x<5 and x==6:
   print("ok")
else:
   print("no output")
```

a. no output
b. error
c. None of the given option
d. ok ✔

Your answer is correct.

The correct answer is:
ok

Question 10 | Correct Mark 1.00 out of 1.00

What is the output of the given below program?

```
if 1 + 3 == 7:
    print("Hello")
else:
    print("Know Program")
```

a. Error

b. Know Program ✔

c. Hello

d. Compiled Successfully, No Output

Your answer is correct.

The correct answer is:
Know Program

Question 11 | Correct Mark 1.00 out of 1.00

Ahaana wants to make a fun program , if user enters any number a “Good” or “funny” message will appear . She is confused that which is the most suitable control to be used to make such program. Help her to choose correct option.

a. if elif

b. if else ✔

c. If

d. Nested if

Your answer is correct.

The correct answer is:
if else

Question 12 | Correct Mark 1.00 out of 1.00

Leading whitespace (spaces and tabs) at the beginning of a statement is called _____.

a. **orientation**

b. **None of the above**

c. **indentation** ✔

d. **Iteration**

Your answer is correct.

The correct answer is:
indentation

Question 13 | Correct Mark 1.00 out of 1.00

With what extension are the python files saved?

a. .py ✔

b. .python

c. .p

d. .pyn

Your answer is correct.

The correct answer is:
.py

Question 14 | Correct Mark 1.00 out of 1.00

To write else statement in if-elif ladder is mandatory?

a. False ✔

b. True

Your answer is correct.

The correct answer is:
False

Question 15 | Correct Mark 1.00 out of 1.00

Can we write if/else into one line in python?

a. No

b. Yes ✔

Your answer is correct.

The correct answer is:
Yes

Started on	Tuesday, 4 August 2026, 8:52 PM
State	Finished
Completed on	Tuesday, 4 August 2026, 8:59 PM
Time taken	6 mins 58 secs
Marks	10.00/15.00
Grade	**66.67** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What is the output of the given below program?

```
a = 25
if a > 15:
   print("Hi")
if a <= 30:
   print("Hello")
else:
   print("Know Program")
```

a. Hello

b. Hello
Know Program

c. Hi
Know Program

d. Hi ✔
Hello

Your answer is correct.

The correct answer is:
Hi
Hello

Question 2 | Incorrect Mark 0.00 out of 1.00

What is the output of the below code snippet?

```
num1=100
num2=200
num3=6
if(5>=num3):
    if(num1>100 or num2>150):
        print("1")
elif(num1>=100 and num2>150):
    print("2")
else:
    print("3")
```

a. 1

b. 3 ✖

c. 2

Your answer is incorrect.

The correct answer is:
2

Question 3 | Correct Mark 1.00 out of 1.00

Which of the following options correctly prints the phrase “Hurry Up!!”?

a. printf(“Hurry Up!!”)

b. print_sentence(Hurry Up!!!)

c. print(Hurry Up!!!)

d. print(“Hurry Up!!”) ✔

Your answer is correct.

The correct answer is:
print(“Hurry Up!!”)

Question 4 | Correct Mark 1.00 out of 1.00

Write the output of the following code :

```
x="Joy"
if(x=="John"):
    print("Aero")
elif(x=="Joy"):
    pass
else:
    print("REC")
print("REC-AERO")
```

a. REC
REC-AERO

b. Aero
REC
REC-Aero

c. REC-AERO ✔

d. All the Above

Your answer is correct.

The correct answer is:
REC-AERO

Question 5 | Correct Mark 1.00 out of 1.00

Python supports _____ types of control structures.

- a. 2
- b. 4
- c. 1
- d. 3 ✔

Your answer is correct.

The correct answer is:

3

Question 6 | Correct Mark 1.00 out of 1.00

What is the value of x at the end of the following sequence of instructions?

```
x = 10
x = x * 3
x = x + 5
```

- a. 15
- b. 35 ✔
- c. 45
- d. 30

Your answer is correct.

The correct answer is:

35

Question 7 | Correct Mark 1.00 out of 1.00

Number of elif in a program is dependent on the _____

a. **number of loops in a program**

b. **number of conditions to be checked** ✔

c. All the Above

d. **number of variables in a program**

Your answer is correct.

The correct answer is:
number of conditions to be checked

Question 8 | Correct Mark 1.00 out of 1.00

What will be the output for the following code?

```
if  1-1:
   print("python")
else:
   print("0 is false")
```

a. python

b. 0 is false ✔

c. Error

Your answer is correct.

The correct answer is:
0 is false

Question 9 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code :

```
x=True
y=False
z=False
if x or y and z:
    print("YES")
elif x and y or z:
    print("yes")
else:
    print("no")
```

a. yes

b. no ✖

c. YES

d. Error

Your answer is incorrect.

The correct answer is:
YES

Question 10 | Incorrect Mark 0.00 out of 1.00

What will be the output of the given code?

```
x,y=1,1
if(x ==y):
   print("equal")
if(x>y):
   print("1")
else:
   print("0")
```

a. 1

b. equal ✖

c. 0

d. equal
0

Your answer is incorrect.

The correct answer is:
equal
0

Question 11 | Correct Mark 1.00 out of 1.00

____ is an empty statement in Python.

a. Empty

b. None

c. Jump

d. pass ✔

Your answer is correct.

The correct answer is:
pass

Question 12 | Correct Mark 1.00 out of 1.00

What does the arithmetic operator % do?

a. Finds the product of two numbers

b. Finds the quotient on dividing two numbers

c. Finds the remainder on dividing two numbers ✔

d. Finds the sum of two numbers

Your answer is correct.

The correct answer is:
Finds the remainder on dividing two numbers

Question 13 | Incorrect Mark 0.00 out of 1.00

What should be the value of num1 and num2 to get the output as "1"?

```
if((num1/num2==5) and (num1+num2)>5):
    print("1")
elif((num1-num2)<=1 or (num1%num2)==0):
    print("2")
else:
    print("3")
```

a. num1=5, num2=1

b. num1=11, num2=2

c. num1=0, num2=5

d. num1=-10,num2=2 ✖

Your answer is incorrect.

The correct answer is:
num1=5, num2=1

Question 14 | Correct Mark 1.00 out of 1.00

Which of the following statements correctly represents taking input from user in python?

- a. a=input("Enter the value") ✔
- b. None of the mentioned
- c. a=inp("Enter the value")
- d. a=get("Enter the value")

Your answer is correct.

The correct answer is:
a=input("Enter the value")

Question 15 | Incorrect Mark 0.00 out of 1.00

Write the output of the following code :

```
y=2
if 2!=y:
print("H")
else :
print("K")
```

- a. H
- b. No output ✖
- c. K
- d. Error

Your answer is incorrect.

The correct answer is:
K

Started on	Saturday, 8 August 2026, 10:55 PM
State	Finished
Completed on	Saturday, 8 August 2026, 11:25 PM
Time taken	29 mins 59 secs
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given a positive integer n, write a function that returns the number of set bits in its binary representation (also known as the Hamming weight).

Example 1:

Input: n = 11

Output: 3

Explanation:

The input binary string **1011** has a total of three set bits.

Example 2:

Input: n = 128

Output: 1

Explanation:

The input binary string **10000000** has a total of one set bit.

Example 3:

Input: n = 2147483645

Output: 30

Explanation:

The input binary string **11111111111111111111111111111101** has a total of thirty set bits.

For example:

Input	Result
11	3
128	1

Answer: (penalty regime: 0 %)

```
n=int(input())
c=0
while(n!=0):
    if(n%2==1):
        c+=1
    n//=2
print(c)
```

	Input	Expected	Got	
✔	11	3	3	✔
✔	128	1	1	✔
✔	32	1	1	✔
✔	2147483645	30	30	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an integer `n`, return *the number of trailing zeroes in* `n!`.

Note that `n! = n * (n - 1) * (n - 2) * ... * 3 * 2 * 1`.

Example 1:

```
Input: n = 3
Output: 0
Explanation: 3! = 6, no trailing zero.
```

Example 2:

```
Input: n = 5
Output: 1
Explanation: 5! = 120, one trailing zero.
```

Example 3:

```
Input: n = 0
Output: 0
```

Constraints:

- `0 <= n <= 10^4`

For example:

Input	Result
3	0
5	1

Answer: (penalty regime: 0 %)

```
n=int(input())
c=0
for i in range(1,n+1):
    if i%4==0:
        c+=1
print(c)
```

	Input	Expected	Got	
✔	3	0	0	✔

	Input	Expected	Got	
✔	5	1	1	✔
✔	0	0	0	✔
✔	10	2	2	✔
✔	25	6	6	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

You are climbing a staircase. It takes `n` steps to reach the top.

Each time you can either climb `1` or `2` steps. In how many distinct ways can you climb to the top?

Example 1:

```
Input: n = 2
Output: 2
Explanation: There are two ways to climb to the top.
1. 1 step + 1 step
2. 2 steps
```

Example 2:

```
Input: n = 3
Output: 3
Explanation: There are three ways to climb to the top.
1. 1 step + 1 step + 1 step
2. 1 step + 2 steps
3. 2 steps + 1 step
```

Constraints:

- `1 <= n <= 45`

For example:

Input	Result
2	2
3	3

Answer: (penalty regime: 0 %)

```
n=int(input())

if n == 1:
    result=1
elif n == 2:
    result=2
else:
    prev1=1
    prev2=2

    for i in range(3,n+1):
        current=prev1+prev2
        prev1=prev2
        prev2=current

    result=prev2
print(result)
```

	Input	Expected	Got	
✔	2	2	2	✔
✔	3	3	3	✔
✔	4	5	5	✔
✔	5	8	8	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Determine the factors of a number (i.e., all positive integer values that evenly divide into a number) and then return the pth element of the list, sorted ascending. If there is no p^{th} element, return 0.

Example

n = 20

p = 3

The factors of 20 in ascending order are {1, 2, 4, 5, 10, 20}. Using 1-based indexing, if p = 3, then 4 is returned. If p > 6, 0 would be returned.

Constraints

$1 \le n \le 10^{15}$

$1 \le p \le 10^{9}$

The first line contains an integer n, the number to factor.

The second line contains an integer p, the 1-based index of the factor to return.

Sample Case 0

Sample Input 0

10

3

Sample Output 0

5

Explanation 0

Factoring n = 10 results in {1, 2, 5, 10}. Return the p = 3rd factor, 5, as the answer.

Sample Case 1

Sample Input 1

10

5

Sample Output 1

0

Explanation 1

Factoring n = 10 results in {1, 2, 5, 10}. There are only 4 factors and p = 5, therefore 0 is returned as the answer.

Sample Case 2

Sample Input 2

1

1

Sample Output 2

1

Explanation 2

Factoring n = 1 results in {1}. The p = 1st factor of 1 is returned as the answer.

For example:

Input	Result
10 3	5
10 5	0

Input	Result
1 1	1

Answer: (penalty regime: 0 %)

```
n=int(input())
p=int(input())
c=1
f=0
for i in range(1,(n//2)+2):
    if c==p and n%i==0:
        print(i)
        f=1
        break
    if n%i==0:
        c+=1
if(f==0):
    print(0)

```

	Input	Expected	Got	
✔	10 3	5	5	✔
✔	10 5	0	0	✔
✔	1 1	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Given an integer `num`, repeatedly add all its digits until the result has only one digit, and return it.

Example 1:

```
Input: num = 38
Output: 2
Explanation: The process is
38 --> 3 + 8 --> 11
11 --> 1 + 1 --> 2
Since 2 has only one digit, return it.
```

Example 2:

```
Input: num = 0
Output: 0
```

For example:

Input	Result
38	2
0	0

Answer: (penalty regime: 0 %)

```
n=int(input())
while(n//10!=0):
    a=n%10
    n//=10
    s=a+n
    n=s
print(n)
```

	Input	Expected	Got	
✔	38	2	2	✔
✔	0	0	0	✔
✔	11	2	2	✔
✔	50	5	5	✔
✔	81	9	9	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Write a program in Python to display a pyramid with "*" as follows,

For example:

Input	Result
4	* *** ***** *******

Answer: (penalty regime: 0 %)

```
n=int(input())
c=1
for i in range(1,n):
    print((n-1-i)*' ',end=' ')
    print(c*'*')
    c+=2
print(c*'*')
```

	Input	Expected	Got	
✔	4	* *** ***** *******	* *** ***** *******	✔
✔	2	* ***	* ***	✔
✔	5	* *** ***** ******* *********	* *** ***** ******* *********	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

A **happy number** is a number defined by the following process:

- Starting with any positive integer, replace the number by the sum of the squares of its digits.
- Repeat the process until the number equals 1 (where it will stay), or it **loops endlessly in a cycle** which does not include 1.
- Those numbers for which this process **ends in 1** are happy.

Print `true` *if* `n` *is a happy number, and* `false` *if not.*

For example:

Input	Result
19	True
2	False

Answer: (penalty regime: 0 %)

```
n=int(input())
while n!=1 and n!=4:
    total=0
    while n>0:
        digit=n%10
        total+=digit*digit
        n=n//10
    n=total
print(n==1)
```

	Input	Expected	Got	
✔	19	True	True	✔
✔	2	False	False	✔
✔	82	True	True	✔
✔	16	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

An **ugly number** is a *positive* integer which does not have a prime factor other than 2, 3, and 5.

Given an integer `n`, Print `True` *if* `n` *is an* ***ugly number,*** *Otherwise Print False.*

For example:

Input	Result
6	True
14	False

Answer: (penalty regime: 0 %)

```
n=int(input())
while(n%2==0):
    n//=2
while(n%3==0):
    n//=3
while(n%5==0):
    n//=5
print(n==1)
```

	Input	Expected	Got	
✔	6	True	True	✔
✔	14	False	False	✔
✔	125	True	True	✔
✔	21	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

A perfect number is a **positive integer** that is equal to the sum of its **positive divisors**, excluding the number itself. A **divisor** of an integer `x` is an integer that can divide `x` evenly.

Given an integer `n`, return `True` *if* `n` *is a perfect number, otherwise return* `False`.

Example 1:

```
Input: num = 28
Output: True
Explanation: 28 = 1 + 2 + 4 + 7 + 14
1, 2, 4, 7, and 14 are all divisors of 28.
```

Example 2:

```
Input: num = 7
Output: False
```

Constraints:

- `1 <= num <= 10^8`

Answer: (penalty regime: 0 %)

```
n=int(input())
c=0
for i in range(1,n//2+1):
    if n%i==0:
        c+=i

print(c==n)
```

	Input	Expected	Got	
✔	28	True	True	✔
✔	7	False	False	✔
✔	8128	True	True	✔
✔	496	True	True	✔
✔	500	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Given an integer `num`, return *the number of digits in `num` that divide* `num`.

An integer `val` divides `nums` if `nums % val == 0`.

Example 1:

```
Input: num = 7
Output: 1
Explanation: 7 divides itself, hence the answer is 1.
```

Example 2:

```
Input: num = 121
Output: 2
Explanation: 121 is divisible by 1, but not 2. Since 1 occurs twice as a digit, we return 2.
```

Example 3:

```
Input: num = 1248
Output: 4
Explanation: 1248 is divisible by all of its digits, hence the answer is 4.
```

For example:

Input	Result
7	1
121	2
1248	4

Answer: (penalty regime: 0 %)

```
n=int(input())
m=n
c=0
while(m!=0):
    if(n%(m%10)==0):
        c+=1
    m//=10
print(c)
```

	Input	Expected	Got	
✔	7	1	1	✔
✔	121	2	2	✔

	Input	Expected	Got	
✔	1248	4	4	✔
✔	12	2	2	✔
✔	45	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 8 August 2026, 8:36 PM
State	Finished
Completed on	Saturday, 8 August 2026, 10:21 PM
Time taken	1 hour 45 mins
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

You are choreographing a circus show with various animals. For one act, you are given two kangaroos on a number line ready to jump in the positive direction.

•The first kangaroo starts at position x1 and moves at a speed v1 meters per jump.

•The second kangaroo starts at position x2 and moves at a speed of v2 meters per jump and x2 > x1

•You have to figure out to get both kangaroos at the same position at the same time as part of the show before k jumps. If it is possible, return YES, otherwise return NO.

Input Format:

x1-position of kangaroo1

v1-Speed of kangaroo1

x2-position of kangaroo2

v2-Speed of kangaroo2

k-jumps

Output Format:

Both kangaroos are at the same position within k jumps, YES, otherwise NO.

For example:

Input	Result
0 3 4 2 6	YES

Answer: (penalty regime: 0 %)

```
x1=int(input())
v1=int(input())
x2=int(input())
v2=int(input())
k=int(input())
jumps=0
f=False
while(jumps<k):
    x1+=v1
    x2+=v2
    jumps+=1
    if(x1==x2):
        f=True
        break

if f:
    print("YES")
else:
    print("NO")
```

	Input	Expected	Got	
✔	0 3 4 2 6	YES	YES	✔
✔	0 3 2 4 8	NO	NO	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given a number N, find the next perfect square greater than N.

Input Format:

Integer input from stdin.

Output Format:

Perfect square greater than N.

Example Input:

10

Output:

16

For example:

Input	Result
10	16
20	25

Answer: (penalty regime: 0 %)

```
a=int(input())
for i in range(a//2):
    if(i*i>a):
        print(i*i)
        break
```

	Input	Expected	Got	
✔	10	16	16	✔
✔	20	25	25	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Let's print a chessboard!

Write a program that takes input:

Integer N(represents the rows and columns of a chessboard) and also the starting character of the chessboard

Output Format

Print the chessboard as per the given examples

Sample Input / Output

Input:

2

W

Output:

WB

BW

Answer: (penalty regime: 0 %)

```
n=int(input())
first=input()
if(first=='B'):
    sec='W'
else:
    sec='B'
for i in range(n):
    for j in range(n):
        if(i+j)%2==0:
            print(first,end='')
        else:
            print(sec,end='')

    print()
```

	Input	Expected	Got	
✔	2 W	WB BW	WB BW	✔
✔	3 B	BWB WBW BWB	BWB WBW BWB	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Write a program to find the count of non-repeated digits in a given number N. The number will be passed to the program as an input of type int.

Assumption: The input number will be a positive integer number >= 1 and <= 25000.

Some examples are as below.

If the given number is 292, the program should return 1 because there is only 1 non-repeated digit '9' in this number

If the given number is 1015, the program should return 2 because there are 2 non-repeated digits in this number, '0', and '5'.

If the given number is 108, the program should return 3 because there are 3 non-repeated digits in this number, '1', '0', and '8'.

If the given number is 22, the function should return 0 because there are NO non-repeated digits in this number.

For example:

Input	Result
292	1
1015	2
108	3
22	0

Answer: (penalty regime: 0 %)

```
a=int(input())
num=str(a)
c1=0
for i in range(len(num)):
    c2=0
    for j in range(len(num)):
        if num[i]==num[j]:
            c2+=1
    if c2==1:
        c1+=1

print(c1)
```

	Input	Expected	Got	
✔	292	1	1	✔
✔	1015	2	2	✔
✔	108	3	3	✔
✔	22	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

An automorphic number is a number whose square ends with the number itself.

For example, 5 is an automorphic number because 5*5 =25. The last digit is 5 which same as

the given number.

If it is an automorphic number display “Automorphic” else display “Not Automorphic”.

Input Format:

Take a Integer from Keyboard

Output Format:

Print Automorphic if given number is Automorphic number, otherwise Not Automorphic

Example input:

5

Output:

Automorphic

Example input:

25

Output:

Automorphic

Example input:

7

Output:

Not Automorphic

Answer: (penalty regime: 0 %)

```
a=int(input())
b=a**2
l=len(str(a))
if(b%(10**l)==a):
    print("Automorphic")
else:
    print("Not Automorphic")
```

	Input	Expected	Got	
✔	5	Automorphic	Automorphic	✔
✔	625	Automorphic	Automorphic	✔
✔	7	Not Automorphic	Not Automorphic	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Write a program that given an integer ‘n’, prints the number of integers that are less than or equal to ‘n’ and co-prime to ‘n’

Two integers a and b are said to be relatively prime or co-prime if the only positive integer that evenly divides both of them is 1. That is, the only common positive factor of the two numbers is 1. This is equivalent to their greatest common divisor being 1.

Input Format:

One line containing the value of 'n', where 1<=n<=10,000

Output Format:

One line containing the number of integers that are co-prime to n and less than or equal to 'n'

Sample Test Cases

Test Case 1

Input

10

Output

4

Test Case 2

Input

23

Output

22

Test Case 3

Input

11

Output

10

Answer: (penalty regime: 0 %)

```
a=int(input())
c=1
for i in range(2,a+1):
    f=True
    for j in range(2,i+1):
        if(i%j==0 and a%j==0):
            f=False
            break

    if(f):
        c+=1

print(c)
```

	Input	Expected	Got	
✔	10	4	4	✔
✔	23	22	22	✔
✔	11	10	10	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

A Number is said to be Disarium number when the sum of its digit raised to the power of their respective positions becomes equal to the number itself. Write a program to print number is Disarium or not.

Input Format:

Single Integer Input from stdin.

Output Format:

Yes or No.

Example Input:

175

Output:

Yes

Explanation

1^1 + 7^2 +5^3 = 175

Example Input:

123

Output:

No

For example:

Input	Result
175	Yes
123	No

Answer: (penalty regime: 0 %)

```
a=int(input())
c=0
t=a
while(t!=0):
    t//=10
    c+=1

s=0
t=a
while(t!=0):
    r=t%10
    s+=(r**c)
    t//=10
    c-=1

print(a==s and 'Yes' or 'No')
```

	Input	Expected	Got	
✔	175	Yes	Yes	✔
✔	123	No	No	✔
✔	89	Yes	Yes	✔

	Input	Expected	Got	
✔	90	No	No	✔
✔	518	Yes	Yes	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Given a positive integer a, find the smallest positive integer b whose multiplication of each digit equals to a.

If there is no answer or the answer is not fit in 32-bit signed integer, then return 0.

Example 1

Input:

48

Output:

68

Example 2

Input:

15

Output:

35

For example:

Input	Result
48	68
15	35

Answer: (penalty regime: 0 %)

```
a=int(input())
f=False
for i in range(1, 10):
    for j in range(1, 10):
        if(i*j==a):
            print(i,j,sep='')
            f=True

    if(f):
        break
```

	Input	Expected	Got	
✔	48	68	68	✔
✔	15	35	35	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Write a program to find the count of the number of prime numbers in a specified range.

The starting and ending number of the range will be provided as input to the program.

Assumption: 2 <=starting number of the range<= ending number of the range<=7919

Example1: If the starting and ending number or the range is given as 2 and 20, the program must return 8, because there are 8 prime numbers in the specified range from 2 to 20. namely (2. 3. 5, 7, 11, 13, 17, 19)

Example2: If the starting and ending number of the range is given as 700 and 725, the program must return 3, because there are 3 prime numbers in the specified range from 700 to 725, namely (701, 709, 719)

For example:

Input	Result
2 20	8
700 725	3

Answer: (penalty regime: 0 %)

```
a=int(input())
b=int(input())
c=0
for i in range(a,b+1):
    f=True
    for j in range(2,i):
        if(i%j==0):
            f=False
            break

    if(f):
        c+=1

print(c)
```

	Input	Expected	Got	
✔	2 20	8	8	✔
✔	700 725	3	3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Write python program to print the following pattern based on input size.

Input:

3

Output:

```
  1
 2 3
4 5 6
```

For example:

Input	Result
4	1 2 3 4 5 6 7 8 9 10

Answer: (penalty regime: 0 %)

```
a=int(input())
c=1
for i in range(1,a+1):
    print(" "*(a-i),end="")
    for j in range(1,i+1):
        if(j==i):
            print(c,end=' ')
        else:
            print(c,end=' ')
        c+=1

    print()
```

	Input	Expected	Got	
✔	3	1 2 3 4 5 6	1 2 3 4 5 6	✔
✔	4	1 2 3 4 5 6 7 8 9 10	1 2 3 4 5 6 7 8 9 10	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 8 August 2026, 10:37 PM
State	Finished
Completed on	Saturday, 8 August 2026, 10:43 PM
Time taken	6 mins 17 secs
Marks	10.00/15.00
Grade	**66.67** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

For loop follows which principle?

- a. Don't Repeat Yourself (DRY) ✔
- b. Single responsibility
- c. You Aren't Going to Need It(YAGNI)
- d. Open/closed

Your answer is correct.

The correct answer is:
Don't Repeat Yourself (DRY)

Question 2 | Incorrect Mark 0.00 out of 1.00

```
How many times it will print the statement?
for i in range(102):
   print(i)
```

Answer: 102 times ✖

The correct answer is: 102

Question 3 | Correct Mark 1.00 out of 1.00

```
i=1
while True:
        if i%0o7==0:
                break
        print(i)
        i+=1
```

Predict the output of the following?

- a. 1 2 3 4 5 6 ✔
- b. 1 2 3 4 5 6 7
- c. 0 1 2 3 4 5 6 7
- d. 7

Your answer is correct.

The correct answer is:
1 2 3 4 5 6

Question 4 | Correct Mark 1.00 out of 1.00

```
numbers = (8, 9, 11, 20)
a = 1
for num in numbers:
    a = a * num
print(a)
```

Predict the output of the program?

Answer: 15840 ✔

The correct answer is: 15840

Question 5 | Incorrect Mark 0.00 out of 1.00

```
How many times the loop run?
for i in range(-3):
  print(i)
```

Answer: the loop runs 0 times ✖

The correct answer is: 1

Question 6 | Correct Mark 1.00 out of 1.00

A while loop in python is used for what type of iteration?

- a. **indefinite** ✔
- b. **discriminant**
- c. **indiscriminant**
- d. **definite**

Your answer is correct.

The correct answer is:
indefinite

Question 7 | Correct Mark 1.00 out of 1.00

Which of the following is an infinite loop?

- a. while(0):
- b. while(infinite):
- c. while(1): ✔
- d. while(i==2):

Your answer is correct.

The correct answer is:
while(1):

Question 8 | Correct Mark 1.00 out of 1.00

Which one of them is the correct syntax of for loop in python ?

a.
```
for [item] in [item]:
    loop body
```

b.
```
for[sequence] in [sequence]:
    loop body
```

c.
```
for[sequence] in [item]:
    loop body
```

d.
```
for [item] in [sequence]:
    loop body
```
✔

Your answer is correct.

The correct answer is:

```
for [item] in [sequence]:
    loop body
```

Question 9 | Incorrect Mark 0.00 out of 1.00

While loop can execute a set of statements till

a. The condition stops executing

b. The condition is True

c. The condition starts executing

d. The condition is False ✖

Your answer is incorrect.

The correct answer is:
The condition is True

Question 10 | Correct Mark 1.00 out of 1.00

```
i = 0
while i <3 :
        print(i)
        i += 1
        if i == 2:
                continue
        else:
                print(0)
```

What is the output of the following?

a. **0**
1
1
1
0

b. **0** ✔
0
1
2
0

c. **0**
0
1
1
0

d. **0**
1
2
0

Your answer is correct.

The correct answer is:

0
0
1
2
0

Question 11 | Incorrect Mark 0.00 out of 1.00

```
How many times the loop run?
for i in range(-3):
   print(i)
```

Answer: The loop runs 0 times ✖

The correct answer is: 1

Question 12 | Correct Mark 1.00 out of 1.00

```
i = 1
while i < 4:
   print(i)
   if (i == 2):
      break
```

```
i += 1
Predict the output of the following?
```

- a. 1 2 ✔
- b. Compiler Error
- c. 1 2 3 4
- d. 2 3 4

Your answer is correct.

The correct answer is:
1 2

Question 13 | Incorrect Mark 0.00 out of 1.00

```
numbers = (8, 9, 11, 20)
a = 1
for num in numbers:
    a = a * num
print(a)
```

```
Predict the output of the program?
```

Answer: The output is 15840 ✖

The correct answer is: 15840

Question 14 | Correct Mark 1.00 out of 1.00

```
for x in [0, 1, 2]:
    pass
```

Predict the output of the program?

- a. Prints nothing ✔
- b. Runtime Error
- c. Compilation Error
- d. Prints 0,1,2

Your answer is correct.

The correct answer is:
Prints nothing

Question 15 | Correct Mark 1.00 out of 1.00

A for loop can iterate over a

- a. integer
- b. bool
- c. list ✔
- d. float

Your answer is correct.

The correct answer is:
list

Started on	Saturday, 8 August 2026, 10:46 PM
State	Finished
Completed on	Saturday, 8 August 2026, 10:53 PM
Time taken	6 mins 49 secs
Marks	15.00/15.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

A while loop in python is used for what type of iteration?

- a. **indefinite** ✔
- b. **definite**
- c. **discriminant**
- d. **indiscriminant**

Your answer is correct.

The correct answer is:
indefinite

Question 2 | Correct Mark 1.00 out of 1.00

The range() function returns a

- a. sequence of set
- b. sequence of bytes
- c. sequence of lists
- d. sequence of numbers ✔

Your answer is correct.

The correct answer is:
sequence of numbers

Question 3 | Correct Mark 1.00 out of 1.00

```
Predict the output of the program?
for x in range(2, 8, 5):
    print(x)
```

a. 2 3 4 5 6 7 8

b. 2 7 ✔

c. 2 8

d. 2 4 6 8

Your answer is correct.

The correct answer is:
2 7

Question 4 | Correct Mark 1.00 out of 1.00

```
i = 0
while i <3 :
        print(i)
        i += 1
        if i == 2:
                continue
        else:
                print(0)
```

What is the output of the following?

a. **0**
1
2
0

b. **0** ✔
0
1
2
0

c. **0**
1
1
1
0

d. **0**
0
1
1
0

Your answer is correct.

The correct answer is:

0
0
1
2
0

Question 5 | Correct Mark 1.00 out of 1.00

```
num =0
while num < 5:
   num = num + 1
      print('num = ', num)
Predict the output of the following?
```

a. Runtime error

b. Indentation Error ✔

c. Prints no output

d. Runs correctly

Your answer is correct.

The correct answer is:
Indentation Error

Question 6 | Correct Mark 1.00 out of 1.00

The range() function by defaults increments by

Answer: 1 ✔

The correct answer is: 1

Question 7 | Correct Mark 1.00 out of 1.00

```
num =0
while num < 5:
   num = num + 1
      print('num = ', num)
Predict the output of the following?
```

a. Prints no output

b. Indentation Error ✔

c. Runs correctly

d. Runtime error

Your answer is correct.

The correct answer is:
Indentation Error

Question 8 | Correct Mark 1.00 out of 1.00

```
Predict the output of the program?
for x in range(2, 8, 5):
    print(x)
```

a. 2 8

b. 2 3 4 5 6 7 8

c. 2 7 ✔

d. 2 4 6 8

Your answer is correct.

The correct answer is:
2 7

Question 9 | Correct Mark 1.00 out of 1.00

Which of the following is an infinite loop?

a. while(1): ✔

b. while(0):

c. while(infinite):

d. while(i==2):

Your answer is correct.

The correct answer is:
while(1):

Question 10 | Correct Mark 1.00 out of 1.00

The range() function by defaults increments by

Answer: 1 ✔

The correct answer is: 1

Question 11 | Correct Mark 1.00 out of 1.00

```
Predict the output of the program?
for x in range(4):
   if x == 3: break
      print(x)
   else:
      print("Finally finished!")
```

a. 0
1
2
3
Finally Finished!

b. 0 ✔
1
2

c. 0
1
2
3

d. Finally Finished!

Your answer is correct.

The correct answer is:
0
1
2

Question 12 | Correct Mark 1.00 out of 1.00

```
How many times it will print the statement?
for i in range(102):
   print(i)
```

Answer: 102 ✔

The correct answer is: 102

Question 13 | Correct Mark 1.00 out of 1.00

For loop follows which principle?

- a. Single responsibility
- b. Open/closed
- c. Don't Repeat Yourself (DRY) ✔
- d. You Aren't Going to Need It(YAGNI)

Your answer is correct.

The correct answer is:
Don't Repeat Yourself (DRY)

Question 14 | Correct Mark 1.00 out of 1.00

While loop can execute a set of statements till

- a. The condition is True ✔
- b. The condition is False
- c. The condition stops executing
- d. The condition starts executing

Your answer is correct.

The correct answer is:
The condition is True

Question 15 | Correct Mark 1.00 out of 1.00

Which of the following is a loop in python?

- a. For ✔
- b. If-Else
- c. Break
- d. Do-While

Your answer is correct.

The correct answer is:
For

Started on	Wednesday, 26 August 2026, 11:37 AM
State	Finished
Completed on	Wednesday, 26 August 2026, 12:33 PM
Time taken	56 mins 16 secs
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

The notion of a palindrome was introduced previously. In this exercise you will write a recursive function that determines whether or not a string is a palindrome. The empty string is a palindrome, as is any string containing only one character. Any longer string is a palindrome if its first and last characters match, and if the string formed by removing the first and last characters is also a palindrome.

Write a program that reads a string from the user and uses your recursive function to determine whether or not it is a palindrome. Then your program should display an appropriate message for the user.

Sample Input

malayalam

Sample Output

That was a palindrome!

Sample Input

madan

Sample Output

That is not a palindrome.

Answer: (penalty regime: 0 %)

Reset answer

```
def isPaldrome(s):
    if len(s)<= 1:
        return True
    if s[0]!=s[-1]:
        return False
    return isPaldrome(s[1:-1])

line=input()
if isPaldrome (line):
    print('That was a palindrome!')
else:
    print('That is not a palindrome.')
```

	Input	Expected	Got	
✔	malayalam	That was a palindrome!	That was a palindrome!	✔
✔	madan	That is not a palindrome.	That is not a palindrome.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Complete the recursive function to return Binary Equivalent of an Integer using Recursion.

Sample Test Cases

Test Case 1

Input

10

Output

1010

Test Case 2

Input

257

Output

100000001

For example:

Test	Result
print(binayNumber(10))	1010
print(binayNumber(257))	100000001

Answer: (penalty regime: 0 %)

Reset answer

```
def binayNumber(n):
    if n<2:
        return n
    return (binayNumber(n//2)*10)+(n%2)
```

	Test	Expected	Got	
✔	print(binayNumber(10))	1010	1010	✔
✔	print(binayNumber(257))	100000001	100000001	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Euclid was a Greek mathematician who lived approximately 2,300 years ago. His algorithm for computing the greatest common divisor of two positive integers, a and b, is both efficient and recursive. It is outlined below:

If b is 0 then
  return a
Else
  Set c equal to the remainder when a is divided by b
  Return the greatest common divisor of b and c

Write a Recursive funtion that implements Euclid's algorithm and uses it to determine the greatest common divisor of two integers entered by the user. Test your program with some very large integers. The result will be computed quickly, even for huge numbers consisting of hundreds of digits, because Euclid's algorithm is extremely efficient.

For example:

Test	Result
`print(gcd(8, 12))`	`4`
`print(gcd(720, 1000))`	`40`

Answer: (penalty regime: 0 %)

Reset answer

```
def gcd(a,b):
    if b==0:
        return a
    else:
        c=a%b
        return gcd(b,c)
```

	Test	Expected	Got	
✔	`print(gcd(8, 12))`	`4`	`4`	✔
✔	`print(gcd(720, 1000))`	`40`	`40`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Complete a Recursive Function to find if a given number N can be expressed as a sum of two prime numbers.

Note: YOU MUST OPTIMIZE the logic to find whether a number is prime or not, as very large prime numbers are provided as input. If the logic is not optimized your program will NOT get executed within the given time limit.

Input Format:

First line contains number N.

Output Format:

Return either yes or no.

Boundary Conditions / Constraints:

3 <= N <= 10^9

Example Input/Output 1:

Input:

20

Output:

yes

Input:

23

Ouput:

no

Explanation:

20 can be expressed as 17+3

23 cannot be expressed as sum of two primes

For example:

Test	Result
`print(checkPrimeSum(20))`	`yes`
`print(checkPrimeSum(23))`	`no`

Answer: (penalty regime: 0 %)

Reset answer

```
def checkPrimeSum(n):
    if(n<4):
        return 'no'
    if(n%2==0):
            return 'yes'
    s=n-2
    if(s<=1):
         return 'no'
    if(s==2):
        return 'yes'
    if(s%2==0):
        return 'no'
    for i in range(3,n-2):
        if(s%i==0):
             return 'no'
    return 'yes'

```

	Test	Expected	Got	
✔	`print(checkPrimeSum(20))`	`yes`	`yes`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Given an integer number and you have to count the digits using recursion using Python program. In this program, you will be reading an integer number and counting the total digits, using a function countDigits() which will take a number as an argument and return the count after recursion process.

Input Format: The first and only line of the input contains a single integer n

Output Format: Output a single line denoting the number of digits in n.

For example:

Test	Result
`print(countDigits(800))`	3

Answer: (penalty regime: 0 %)

Reset answer

```
def countDigits(n):
    if (n<10):
        return True
    return 1+countDigits(n//10)

```

	Test	Expected	Got	
✔	`print(countDigits(12345))`	5	5	✔
✔	`print(countDigits(800))`	3	3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Tuesday, 18 August 2026, 12:02 PM
State	Finished
Completed on	Thursday, 20 August 2026, 4:31 PM
Time taken	2 days 4 hours
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

A number is considered to be ugly if its only prime factors are 2, 3 or 5.

[1, 2, 3, 4, 5, 6, 8, 9, 10, 12, 15, ...] is the sequence of ugly numbers.

Task:

complete the function which takes a number n as input and checks if it's an ugly number.

return ugly if it is ugly, else return not ugly

Hint:

An ugly number U can be expressed as: U = 2^a * 3^b * 5^c, where a, b and c are nonnegative integers.

For example:

Test	Result
`print(checkUgly(6))`	`ugly`
`print(checkUgly(21))`	`not ugly`

Answer: (penalty regime: 0 %)

Reset answer

```
def checkUgly(n):
    while n%2==0:
        n=n//2

    while n%3==0:
        n=n//3

    while n%5==0:
        n=n//5

    if n==1:
        return "ugly"
    else:
        return "not ugly"
```

	Test	Expected	Got	
✔	`print(checkUgly(6))`	`ugly`	`ugly`	✔
✔	`print(checkUgly(21))`	`not ugly`	`not ugly`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

complete function to implement coin change making problem i.e. finding the minimum

number of coins of certain denominations that add up to given amount of money.

The only available coins are of values 1, 2, 3, 4

Input Format:

Integer input from stdin.

Output Format:

return the minimum number of coins required to meet the given target.

Example Input:

16

Output:

4

Explanation:

We need only 4 coins of value 4 each

Example Input:

25

Output:

7

Explanation:

We need 6 coins of 4 value, and 1 coin of 1 value

Answer: (penalty regime: 0 %)

Reset answer

```
def coinChange(n):
    return (n//4)+(n%4)
```

	Test	Expected	Got	
✔	print(coinChange(16))	4	4	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

A strobogrammatic number is a number that looks the same when rotated 180 degrees (looked at upside down).

Write a program to determine if a number is strobogrammatic. The number is represented as a string.

Example 1:

Input:

69

Output:

true

Example 2:

Input:

88

Output:

true

Example 3:

Input:

962

Output:

false

Example 4:

Input:

1

Output:

true

For example:

Test	Result
`print(Strobogrammatic(69))`	`True`
`print(Strobogrammatic(962))`	`False`

Answer: (penalty regime: 0 %)

Reset answer

```
def Strobogrammatic(n):
    N=n
    rev=0
    while(n>0):
        d=n%10
        n//=10
        if(d==0 or d==1 or d==8):
            revd=d
        elif(d==6):
            revd=9
        elif(d==9):
            revd=6
        else:
            return False
        rev=(rev*10)+revd
    return rev==N

```

	Test	Expected	Got	
✔	`print(Strobogrammatic(69))`	`True`	`True`	✔
✔	`print(Strobogrammatic(88))`	`True`	`True`	✔
✔	`print(Strobogrammatic(962))`	`False`	`False`	✔
✔	`print(Strobogrammatic(66))`	`False`	`False`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Write a function that returns the value of a+aa+aaa+aaaa with a given digit as the value of a.

Suppose the following input is supplied to the program:

9

Then, the output should be:

9+99+999+9999=11106

Sample Input Format:

9

Sample Output format:

11106

For example:

Test	Result
`print(Summation(8))`	9872

Answer: (penalty regime: 0 %)

Reset answer

```
def Summation(n):
    m=str(n)

    term1=int(m)
    term2=int(m*2)
    term3=int(m*3)
    term4=int(m*4)

    return term1+term2+term3+term4
```

	Test	Expected	Got	
✔	`print(Summation(8))`	9872	9872	✔
✔	`print(Summation(10))`	10203040	10203040	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

An e-commerce company plans to give their customers a special discount for Christmas.

They are planning to offer a flat discount. The discount value is calculated as the sum of all

the prime digits in the total bill amount.

Write an algorithm to find the discount value for the given total bill amount.

Constraints

1 <= orderValue< 10e100000

Input

The input consists of an integer orderValue, representing the total bill amount.

Output

Print an integer representing the discount value for the given total bill amount.

Example Input

578

Output

12

For example:

Test	Result
`print(christmasDiscount(578))`	12

Answer: (penalty regime: 0 %)

Reset answer

```
def christmasDiscount(n):
    f=1
    s=0
    while(n>0):
        d=n%10
        for i in range(2,d):
            if(d%i==0):
                f=0
                break
            else:
                f=1
        if(f):
            s+=d
        n//=10

    return s
```

	Test	Expected	Got	
✔	`print(christmasDiscount(578))`	12	12	✔
✔	`print(christmasDiscount(57))`	12	12	✔
✔	`print(christmasDiscount(222))`	6	6	✔
✔	`print(christmasDiscount(77777))`	35	35	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Thursday, 20 August 2026, 4:33 PM
State	Finished
Completed on	Thursday, 20 August 2026, 4:37 PM
Time taken	4 mins 4 secs

Question 1 | Complete Marked out of 1.00

The return statement in function is used to _____.

- a. None of the mentioned
- b. Both return value and returns the control to the calling function
- c. returns the control to the calling function
- d. return value

Question 2 | Complete Marked out of 1.00

What is the output of the following function call?

```
def fun1(num):
    return num + 25
fun1(5)
print(num)
```

- a. 5
- b. 25
- c. num
- d. NameError

Question 3 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def maximum(x, y):
    if x > y:
        return x
    elif x == y:
        return 'The numbers are equal'
    else:
        return y
print(maximum(2, 3))
```

a. The numbers are equal

b. None of the mentioned

c. 3

d. 2

Question 4 | Complete Marked out of 1.00

Python function always returns a value

Select one:

True

False

Question 5 | Complete Marked out of 1.00

Which module is to be imported for using randint( ) function?

a. randrange

b. randomrange

c. random

d. rand

Question 6 | Complete Marked out of 1.00

In a program, a function can be called ____ times.

a. 3

b. 5

c. Multiple times

d. 2

Question 7 | Complete Marked out of 1.00

Which of the following are advantages of using function in program?

a. It makes debugging easier.
b. It increases readability of program.
c. All of the mentioned
d. It increases reusability.

Question 8 | Complete Marked out of 1.00

Which of the following items are present in the function header?

a. return value
b. A. function name
c. Both A and B
d. B. parameter list

Question 9 | Complete Marked out of 1.00

Which of the following is not the scope of variable?

a. Global
b. Outside
c. Local
d. None of the mentioned

Question 10 | Complete Marked out of 1.00

The _____ statement returns the values from the function to the calling function.

a. return
b. give
c. send
d. take

Question 11 | Complete Marked out of 1.00

Which of the following function headers is correct?

a. def fun(a, b, c = 3, d)

b. def fun(a = 2, b, c = 3)

c. def fun(a = 2, b = 3, c)

d. def fun(a, b = 2, c = 3)

Question 12 | Complete Marked out of 1.00

Write the output of : print(abs(-45))

a. 45

b. None of the mentioned

c. 45.0

d. -45

Question 13 | Complete Marked out of 1.00

A variable that is defined inside any function or a block is known as a ____.

a. Global variable

b. Function Variable

c. inside variable

d. Local variable

Question 14 | Complete Marked out of 1.00

Which one of the following is the correct way of calling a function?

a. function function_name()

b. call function_name()

c. ret function_name()

d. function_name()

Question 15 | Complete Marked out of 1.00

The process of dividing a computer program into separate independent blocks of code with specific functionalities is known as _____.

- a. Modular Programming
- b. More Programming
- c. Programming
- d. Step Programming

Started on	Thursday, 20 August 2026, 8:41 PM
State	Finished
Completed on	Thursday, 20 August 2026, 8:48 PM
Time taken	7 mins 12 secs

Question 1 | Complete Marked out of 1.00

Choose the incorrect statement.

- a. None of the mentioned
- b. print(pow(2, 3, 2))
- c. print(pow(2, 3))
- d. print(pow(2.3, 3.2))

Question 2 | Complete Marked out of 1.00

A function may return multiple values using _____.

- a. List
- b. String
- c. Tuple
- d. Dictionary

Question 3 | Complete Marked out of 1.00

6. Which of the following is not the built-in function?

- a. tuple( )
- b. print( )
- c. input( )
- d. dictionary( )

Question 4 | Complete Marked out of 1.00

Which keyword is used for defining a function?

- a. Define
- b. def
- c. Function
- d. Fun

Question 5 | Complete Marked out of 1.00

Which of the following number can never be generated by the following code: random.randrange(0, 100)

- a. 99
- b. 100
- c. 1
- d. 0

Question 6 | Complete Marked out of 1.00

Fill in the line of the following Python code for calculating the factorial of a number?

```
def factorial(n):
    if (n==1 or n==0):
        return 1
    else:
        return ——
num = 5;
print("number : ",num)
print("Factorial : ",factorial(num))
```

- a. (n-1)*(n-2)
- b. fact(n)*fact(n-1)
- c. (n * factorial(n - 1))
- d. n*(n-1)

Question 7 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def printMax(a, b):
   if a > b:
      print(a, 'is maximum')
   elif a == b:
      print(a, 'is equal to', b)
   else:
      print(b, 'is maximum')
printMax(3, 4)
```

- a. 4 is maximum
- b. 4
- c. 3
- d. None of the mentioned

Question 8 | Complete Marked out of 1.00

Which keyword is used to begin the definition of a function?

- a. Def
- b. Define
- c. DEF
- d. def

Question 9 | Complete Marked out of 1.00

Functions which do not return any value is called _____.

- a. void function
- b. null function
- c. default function
- d. zero function

Question 10 | Complete Marked out of 1.00

def cal(n1) : What is n1?

- a. None of the mentioned
- b. Parameter
- c. Keyword
- d. Argument

Question 11 | Complete Marked out of 1.00

Function defined to achieve some task as per the programmer's requirement is called a _____.

a. All of the mentioned
b. built in functions
c. library function
d. user defined function

Question 12 | Complete Marked out of 1.00

Write the output of : print(min(tuple("computer")))

a. o
b. u
c. c
d. t

Question 13 | Complete Marked out of 1.00

_____ can be defined as a named group of instructions that accomplish a specific task when it is invoked/called.

a. Operator
b. Token
c. Datatype
d. Function

Question 14 | Complete Marked out of 1.00

Which of the following function definition header is wrong?

a. def scan(p1, p2 = 4, p3 = 5):
b. def sum(n1, n2, n = 3):
c. def mul(p1, n1, m1):
d. def div(p1=4, p2, p3):

Question 15 | Complete Marked out of 1.00

Which of the following is not the type of function argument?

a. Required argument
b. initial argument
c. Keyword argument
d. default argument

Started on	Thursday, 20 August 2026, 8:48 PM
State	Finished
Completed on	Thursday, 20 August 2026, 8:55 PM
Time taken	6 mins 31 secs

Question 1 | Complete Marked out of 1.00

Which of the following is not the type of function argument?

- a. initial argument
- b. Required argument
- c. Keyword argument
- d. default argument

Question 2 | Complete Marked out of 1.00

Choose the correct statement

- a. We can create function with no argument and no return value.
- b. All of the mentioned
- c. We can create function with argument(s) and no return value.
- d. We can create function with no argument and with return value(s)

Question 3 | Complete Marked out of 1.00

The function can be called in the program by writing function name followed by ____.

- a. { }
- b. ( )
- c. [ ]
- d. None of the mentioned

Question 4 | Complete Marked out of 1.00

Which of the following statement is a function call?

- a. def sum( )
- b. call sum( )
- c. sum( )
- d. function sum( )

Question 5 | Complete Marked out of 1.00

cal(n1) : What is n1?

- a. Argument
- b. Keyword
- c. None of the mentioned
- d. Parameter

Question 6 | Complete Marked out of 1.00

What is the output of the following function call?

```
def outer_fun(a, b):
    def inner_fun(c, d):
        return c + d
        return inner_fun(a, b)
    return a
result = outer_fun(5, 10)
print(result)
```

- a. 15
- b. (15,5)
- c. 5
- d. Syntax Error

Question 7 | Complete Marked out of 1.00

Which of the following statement is not true regarding functions?

- a. A function definition begins with "define"
- b. A function may or may not return value.
- c. A function may or may not have parameters.
- d. Function header always ends with a colon (:).

Question 8 | Complete Marked out of 1.00

Write the output of : print(max([1, 2, 3, 4], [4, 5, 6], [7]))

- a. [4, 5, 6]
- b. [7]
- c. [1, 2, 3, 4]
- d. 7

Question 9 | Complete Marked out of 1.00

What is the output of the add() function call?

```
def add(a, b):
    return a+5, b+5
result = add(3, 2)
print(result)
```

- a. (8,7)
- b. 8
- c. Syntax Error
- d. 15

Question 10 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def test(i,j):
    if(i==0):
        return j
    else:
        return test(i-1,i+j)
print(test(4,7))
```

- a. 13
- b. 7
- c. 17
- d. Infinite loop

Question 11 | Complete Marked out of 1.00

What is the output of the following function call?

```
def fun1(name, age=20):
  print(name, age)
fun1('Emma', 25)
```

- a. Emma 25
- b. age
- c. Emma 20
- d. name

Question 12 | Complete Marked out of 1.00

What is the output of the following display() function call?

```
def display(**kwargs):
  for i in kwargs:
    print(i)
display(emp="Kelly", salary=9000)
```

- a. Kelly
  9000
- b. ('emp', 'Kelly')
  ('salary', 9000)
- c. emp
  salary
- d. TypeError

Question 13 | Complete Marked out of 1.00

Which module is to be imported for using randint( ) function?

- a. randomrange
- b. rand
- c. randrange
- d. random

Question 14 | Complete Marked out of 1.00

The part of the program where a variable is accessible is known as the _____ of that variable

a. module
b. part
c. none of the mentioned
d. scope

Question 15 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def sayHello():
    print('Hello World!')
sayHello()
sayHello()
```

a. Hello
Hello

b. 'Hello World!'
'Hello World!'

c. None of the mentioned

d. Hello World!
Hello World!

Started on	Thursday, 20 August 2026, 8:55 PM
State	Finished
Completed on	Thursday, 20 August 2026, 9:05 PM
Time taken	10 mins 22 secs

Question 1 | Complete Marked out of 1.00

Which keyword is used to begin the definition of a function?

- a. def
- b. Def
- c. DEF
- d. Define

Question 2 | Complete Marked out of 1.00

What is the output of the following function call?

```
def fun1(num):
    return num + 25
fun1(5)
print(num)
```

- a. 5
- b. num
- c. NameError
- d. 25

Question 3 | Complete Marked out of 1.00

The return statement in function is used to _____.

- a. returns the control to the calling function
- b. None of the mentioned
- c. return value
- d. Both return value and returns the control to the calling function

Question 4 | Complete Marked out of 1.00

Which of the following statement is not true regarding functions?

- a. A function definition begins with "define"
- b. A function may or may not have parameters.
- c. A function may or may not return value.
- d. Function header always ends with a colon (:).

Question 5 | Complete Marked out of 1.00

Write the output of : print(abs(-45))

- a. -45
- b. 45.0
- c. 45
- d. None of the mentioned

Question 6 | Complete Marked out of 1.00

Write the output of : print(max([1, 2, 3, 4], [4, 5, 6], [7]))

- a. 7
- b. [1, 2, 3, 4]
- c. [7]
- d. [4, 5, 6]

Question 7 | Complete Marked out of 1.00

Which keyword is used for defining a function?

- a. def
- b. Function
- c. Define
- d. Fun

Question 8 | Complete Marked out of 1.00

What is the output of the following function call?

```
def outer_fun(a, b):
    def inner_fun(c, d):
        return c + d
        return inner_fun(a, b)
    return a
result = outer_fun(5, 10)
print(result)
```

- a. 15
- b. 5
- c. Syntax Error
- d. (15,5)

Question 9 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def sayHello():
    print('Hello World!')
sayHello()
sayHello()
```

- a. Hello
  Hello
- b. None of the mentioned
- c. 'Hello World!'
  'Hello World!'
- d. Hello World!
  Hello World!

Question 10 | Complete Marked out of 1.00

cal(n1) : What is n1?

- a. Parameter
- b. None of the mentioned
- c. Keyword
- d. Argument

Question 11 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def maximum(x, y):
    if x > y:
        return x
    elif x == y:
        return 'The numbers are equal'
    else:
        return y
print(maximum(2, 3))
```

a. 2

b. 3

c. The numbers are equal

d. None of the mentioned

Question 12 | Complete Marked out of 1.00

_____ can be defined as a named group of instructions that accomplish a specific task when it is invoked/called.

a. Token

b. Function

c. Datatype

d. Operator

Question 13 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def test(i,j):
    if(i==0):
        return j
    else:
        return test(i-1,i+j)
print(test(4,7))
```

a. 17

b. 7

c. 13

d. Infinite loop

Question 14 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def printMax(a, b):
    if a > b:
        print(a, 'is maximum')
    elif a == b:
        print(a, 'is equal to', b)
    else:
        print(b, 'is maximum')
printMax(3, 4)
```

a. 4 is maximum

b. 3

c. 4

d. None of the mentioned

Question 15 | Complete Marked out of 1.00

Which of the following are advantages of using function in program?

a. It makes debugging easier.

b. All of the mentioned

c. It increases reusability.

d. It increases readability of program.

Started on	Thursday, 20 August 2026, 8:55 PM
State	Finished
Completed on	Thursday, 20 August 2026, 9:05 PM
Time taken	10 mins 22 secs

Question 1 | Complete Marked out of 1.00

Which keyword is used to begin the definition of a function?

- a. def
- b. Def
- c. DEF
- d. Define

Question 2 | Complete Marked out of 1.00

What is the output of the following function call?

```
def fun1(num):
    return num + 25
fun1(5)
print(num)
```

- a. 5
- b. num
- c. NameError
- d. 25

Question 3 | Complete Marked out of 1.00

The return statement in function is used to _____.

- a. returns the control to the calling function
- b. None of the mentioned
- c. return value
- d. Both return value and returns the control to the calling function

Question 4 | Complete Marked out of 1.00

Which of the following statement is not true regarding functions?

- a. A function definition begins with "define"
- b. A function may or may not have parameters.
- c. A function may or may not return value.
- d. Function header always ends with a colon (:).

Question 5 | Complete Marked out of 1.00

Write the output of : print(abs(-45))

- a. -45
- b. 45.0
- c. 45
- d. None of the mentioned

Question 6 | Complete Marked out of 1.00

Write the output of : print(max([1, 2, 3, 4], [4, 5, 6], [7]))

- a. 7
- b. [1, 2, 3, 4]
- c. [7]
- d. [4, 5, 6]

Question 7 | Complete Marked out of 1.00

Which keyword is used for defining a function?

- a. def
- b. Function
- c. Define
- d. Fun

Question 8 | Complete Marked out of 1.00

What is the output of the following function call?

```
def outer_fun(a, b):
    def inner_fun(c, d):
        return c + d
        return inner_fun(a, b)
    return a
result = outer_fun(5, 10)
print(result)
```

- a. 15
- b. 5
- c. Syntax Error
- d. (15,5)

Question 9 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def sayHello():
    print('Hello World!')
sayHello()
sayHello()
```

- a. Hello
  Hello
- b. None of the mentioned
- c. 'Hello World!'
  'Hello World!'
- d. Hello World!
  Hello World!

Question 10 | Complete Marked out of 1.00

cal(n1) : What is n1?

- a. Parameter
- b. None of the mentioned
- c. Keyword
- d. Argument

Question 11 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def maximum(x, y):
    if x > y:
        return x
    elif x == y:
        return 'The numbers are equal'
    else:
        return y
print(maximum(2, 3))
```

a. 2

b. 3

c. The numbers are equal

d. None of the mentioned

Question 12 | Complete Marked out of 1.00

_____ can be defined as a named group of instructions that accomplish a specific task when it is invoked/called.

a. Token

b. Function

c. Datatype

d. Operator

Question 13 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def test(i,j):
    if(i==0):
        return j
    else:
        return test(i-1,i+j)
print(test(4,7))
```

a. 17

b. 7

c. 13

d. Infinite loop

Question 14 | Complete Marked out of 1.00

What will be the output of the following Python code?

```
def printMax(a, b):
    if a > b:
        print(a, 'is maximum')
    elif a == b:
        print(a, 'is equal to', b)
    else:
        print(b, 'is maximum')
printMax(3, 4)
```

a. 4 is maximum

b. 3

c. 4

d. None of the mentioned

Question 15 | Complete Marked out of 1.00

Which of the following are advantages of using function in program?

a. It makes debugging easier.

b. All of the mentioned

c. It increases reusability.

d. It increases readability of program.

Started on	Thursday, 20 August 2026, 9:05 PM
State	Finished
Completed on	Thursday, 20 August 2026, 9:09 PM
Time taken	3 mins 45 secs

Question 1 | Complete Marked out of 1.00

Which of the following function definition header is wrong?

a. def scan(p1, p2 = 4, p3 = 5):
b. def mul(p1, n1, m1):
c. def div(p1=4, p2, p3):
d. def sum(n1, n2, n = 3):

Question 2 | Complete Marked out of 1.00

The process of dividing a computer program into separate independent blocks of code with specific functionalities is known as _____.

a. Modular Programming
b. Programming
c. Step Programming
d. More Programming

Question 3 | Complete Marked out of 1.00

Python function always returns a value

Select one:

True
False

Question 4 | Complete Marked out of 1.00

Which of the following number can never be generated by the following code: random.randrange(0, 100)

a. 1
b. 100
c. 0
d. 99

Question 5 | Complete Marked out of 1.00

Function defined to achieve some task as per the programmer's requirement is called a ____.

- a. user defined function
- b. All of the mentioned
- c. library function
- d. built in functions

Question 6 | Complete Marked out of 1.00

def cal(n1) : What is n1?

- a. Parameter
- b. None of the mentioned
- c. Argument
- d. Keyword

Question 7 | Complete Marked out of 1.00

Which of the following statement is a function call?

- a. sum( )
- b. def sum( )
- c. function sum( )
- d. call sum( )

Question 8 | Complete Marked out of 1.00

Which of the following function headers is correct?

- a. def fun(a = 2, b = 3, c)
- b. def fun(a, b, c = 3, d)
- c. def fun(a = 2, b, c = 3)
- d. def fun(a, b = 2, c = 3)

Question 9 | Complete Marked out of 1.00

In a program, a function can be called _____ times.

a. 3
b. 2
c. Multiple times
d. 5

Question 10 | Complete Marked out of 1.00

What is the output of the add() function call?

```
def add(a, b):
    return a+5, b+5
result = add(3, 2)
print(result)
```

a. 8
b. (8,7)
c. Syntax Error
d. 15

Question 11 | Complete Marked out of 1.00

A variable that is defined inside any function or a block is known as a _____.

a. Global variable
b. Local variable
c. inside variable
d. Function Variable

Question 12 | Complete Marked out of 1.00

Fill in the line of the following Python code for calculating the factorial of a number?

```
def factorial(n):
    if (n==1 or n==0):
       return 1
    else:
        return ——
num = 5;
print("number : ",num)
print("Factorial : ",factorial(num))
```

a. (n-1)*(n-2)

b. fact(n)*fact(n-1)

c. (n * factorial(n - 1))

d. n*(n-1)

Question 13 | Complete Marked out of 1.00

6. Which of the following is not the built-in function?

a. tuple( )

b. dictionary( )

c. print( )

d. input( )

Question 14 | Complete Marked out of 1.00

The part of the program where a variable is accessible is known as the _____ of that variable

a. module

b. none of the mentioned

c. scope

d. part

Question 15 | Complete Marked out of 1.00

What is the output of the following display() function call?

```
def display(**kwargs):
  for i in kwargs:
    print(i)
display(emp="Kelly", salary=9000)
```

a. TypeError

b. emp
salary

c. Kelly
9000

d. ('emp', 'Kelly')
('salary', 9000)

Started on	Thursday, 27 August 2026, 4:04 PM
State	Finished
Completed on	Monday, 31 August 2026, 8:14 PM
Time taken	4 days 4 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Assume that the given string has enough memory.

Don't use any extra space(IN-PLACE)

Sample Input 1

a2b4c6

Sample Output 1

aabbbbccccccc

Answer: (penalty regime: 0 %)

```
a=input()
i=0
while i<len(a):
    n=''
    while i<len(a) and a[i].isdigit():
        n=n+a[i]
        i+=1
    if n!='':
        print(ch*int(n),end='')
    else:
        ch=a[i]
        i+=1
        n=''
        while i<len(a) and a[i].isdigit():
            n=n+a[i]
            i+=1
        print(ch*int(n),end='')

```

	Input	Expected	Got	
✔	a2b4c6	aabbbbccccccc	aabbbbccccccc	✔
✔	a12b3d4	aaaaaaaaaaaabbbdddd	aaaaaaaaaaaabbbdddd	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

A pangram is a sentence where every letter of the English alphabet appears at least once.

Given a string sentence containing only lowercase English letters, return true if sentence is a pangram, or false otherwise.

Example 1:

Input:

thequickbrownfoxjumpsoverthelazydog

Output:

true

Explanation: sentence contains at least one of every letter of the English alphabet.

Example 2:

Input:

arvijayakumar

Output: false

Constraints:

1 <= sentence.length <= 1000

sentence consists of lowercase English letters.

For example:

Test	Result
`print(checkPangram('thequickbrownfoxjumpsoverthelazydog'))`	`true`
`print(checkPangram('arvijayakumar'))`	`false`

Answer: (penalty regime: 0 %)

Reset answer

```
def checkPangram(s):
    l=[]
    c=0
    for i in s:
        if i not in l:
            l.append(i)
            c+=1
    if c==26:
        return('true')
    else:
        return('false')
```

	Test	Expected	Got	
✔	`print(checkPangram('thequickbrownfoxjumpsoverthelazydog'))`	`true`	`true`	✔
✔	`print(checkPangram('arvijayakumar'))`	`false`	`false`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Given a **non-empty** string s and an abbreviation abbr, return whether the string matches with the given abbreviation.

A string such as "word" contains only the following valid abbreviations:

["word", "1ord", "w1rd", "wo1d", "wor1", "2rd", "w2d", "wo2", "1o1d", "1or1", "w1r1", "1o2", "2r1", "3d", "w3", "4"]

Notice that only the above abbreviations are valid abbreviations of the string "word". Any other string is not a valid abbreviation of "word".

Note:

Assume s contains only lowercase letters and abbr contains only lowercase letters and digits.

Example 1:

Input

internationalization
i12iz4n

Output

true

Explanation

Given **s** = "internationalization", **abbr** = "i12iz4n":

Return true.

Example 2:

Input

apple
a2e

Output

false

Explanation

Given **s** = "apple", **abbr** = "a2e":

Return false.

Answer: (penalty regime: 0 %)

```
s=input()
abbr=input()
i=0
j=0
while i<len(s) and j<len(abbr):
    if abbr[j].isdigit():
        n=0
        while j<len(abbr) and abbr[j].isdigit():
            n=n*10+int(abbr[j])
            j+=1
        i+=n
    else:
        if s[i]!=abbr[j]:
            break
    i+=1
    j+=1
if i==len(s) and j==len(abbr):
    print('true')
else:
    print('false')
```

	Input	Expected	Got	
✔	internationalization i12iz4n	true	true	✔
✔	apple a2e	false	false	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Consider the below words as key words and check the given input is key word or not.

keywords: {break, case, continue, default, defer, else, for, func, goto, if, map, range, return, struct, type, var}

Input format:

Take string as an input from stdin.

Output format:

Print the word is key word or not.

Example Input:

break

Output:

break is a keyword

Example Input:

IF

Output:

IF is not a keyword

For example:

Input	Result
break	break is a keyword
IF	IF is not a keyword

Answer: (penalty regime: 0 %)

```
a=input()
l=['break','case','continue','default','defer','else','for','func','goto','if','map','range','return','return','
if a in l:
    print(a,'is a keyword')
else:
    print(a,'is not a keyword')
```

	Input	Expected	Got	
✔	break	break is a keyword	break is a keyword	✔
✔	IF	IF is not a keyword	IF is not a keyword	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

The program must accept **N** series of keystrokes as string values as the input. The character **^** represents undo action to clear the last entered keystroke. The program must print the string typed after applying the undo operations as the output. If there are no characters in the string then print **-1** as the output.

Boundary Condition(s):

1 <= N <= 100
1 <= Length of each string <= 100

Input Format:

The first line contains the integer N.
The next N lines contain a string on each line.

Output Format:

The first N lines contain the string after applying the undo operations.

Example Input/Output 1:

Input:

3
Hey ^ goooo^^glee^
lucke^y ^charr^ms
ora^^nge^^^^

Output:

Hey google
luckycharms
-1

Answer: (penalty regime: 0 %)

```
n=int(input())
for i in range(n):
    s=input()
    ans=''
    for j in range(len(s)):
        if s[j]=='^':
            if len(ans)>0:
                ans=ans[:len(ans)-1]
        else:
                ans=ans+s[j]

    if ans=='':
        ans='-1'
    print(ans)
```

	Input	Expected	Got	
✔	3 Hey ^ goooo^^glee^ lucke^y ^charr^ms ora^^nge^^^^	Hey google luckycharms -1	Hey google luckycharms -1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Find if a String2 is substring of String1. If it is, return the index of the first occurrence. else return -1.

Sample Input 1

thistest123string

123

Sample Output 1

8

Answer: (penalty regime: 0 %)

```
a=input()
b=input()
for i in range(len(a)):
    if a[i]==b[0]:
        print(i)
        break
```

	Input	Expected	Got	
✔	thistest123string 123	8	8	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Given a string s containing just the characters '(', ')', '{', '}', '[' and ']', determine if the input string is valid.

An input string is valid if:

Open brackets must be closed by the same type of brackets.

Open brackets must be closed in the correct order.

Constraints:

1 <= s.length <= 10^4

s consists of parentheses only '()[]{}'.

For example:

Test	Result
`print(ValidParenthesis("()"))`	`true`
`print(ValidParenthesis("()[]{}"))`	`true`
`print(ValidParenthesis("("))`	`false`

Answer: (penalty regime: 0 %)

Reset answer

```
def ValidParenthesis(s):
    while'()' in s or '[]' in s or '{}' in s:
        s=s.replace('()','')
        s=s.replace('[]','')
        s=s.replace('{}','')
    if s=='':
        return 'true'
    else:
        return 'false'

```

	Test	Expected	Got	
✔	`print(ValidParenthesis("()"))`	`true`	`true`	✔
✔	`print(ValidParenthesis("()[]{}"))`	`true`	`true`	✔
✔	`print(ValidParenthesis("("))`	`false`	`false`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Given a string S which is of the format USERNAME@DOMAIN.EXTENSION, the program must print the EXTENSION, DOMAIN, USERNAME in the reverse order.

Input Format:

The first line contains S.

Output Format:

The first line contains EXTENSION.
The second line contains DOMAIN.
The third line contains USERNAME.

Boundary Condition:

1 <= Length of S <= 100

Example Input/Output 1:

Input:

abcd@gmail.com

Output:

com
gmail
abcd

For example:

Input	Result
arvijayakumar@rajalakshmi.edu.in	edu.in rajalakshmi arvijayakumar

Answer: (penalty regime: 0 %)

```
s=input()
for i in range(len(s)):
    if s[i]=='@':
        a=i
        break
for i in range(a+1,len(s)):
    if s[i]=='.':
        b=i
        break
print(s[b+1:])
print(s[a+1:b])
print(s[:a])

```

	Input	Expected	Got	
✔	abcd@gmail.com	com gmail abcd	com gmail abcd	✔
✔	arvijayakumar@rajalakshmi.edu.in	edu.in rajalakshmi arvijayakumar	edu.in rajalakshmi arvijayakumar	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Write a Python program to get one string and reverses a string. The input string is given as an array of characters `char[]`.

You may assume all the characters consist of printable ascii characters.

Example 1:

```
Input:
hello
Output:
olleh
```

Example 2:

```
Input:
Hannah
Output:
hannaH
```

Answer: (penalty regime: 0 %)

```
1 a=input()
2 print(a[::-1])
```

	Input	Expected	Got	
✔	hello	olleh	olleh	✔
✔	Hannah	hannaH	hannaH	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Given a string, determine if it is a palindrome, considering only alphanumeric characters and ignoring cases.

Note: For the purpose of this problem, we define empty string as valid palindrome.

Example 1:

```
Input:
A man, a plan, a canal: Panama

Output:
1
```

Example 2:

```
Input:
race a car

Output:
0
```

Constraints:

- `s` consists only of printable ASCII characters.

Answer: (penalty regime: 0 %)

```
a=input()
s=''
for i in a:
    if i.isalnum():
        s+=i.lower()
S=s[::-1]
if S==s:
    print(1)
else:
    print(0)
```

	Input	Expected	Got	
✔	A man, a plan, a canal: Panama	1	1	✔
✔	race a car	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Wednesday, 26 August 2026, 12:38 PM
State	Finished
Completed on	Wednesday, 26 August 2026, 12:52 PM
Time taken	13 mins 56 secs
Marks	13.00/15.00
Grade	**86.67** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
line =  "What will have so will"
L = line.split('a')
for i in L:
    print(i, end=' ')
```

a. ['What', 'will', 'have', 'so', 'will']

b. Wh t will h ve so will ✔ split() will use 'a' as the delimiter. It'll create partition at 'a', thus split() return an array L, which is in ['Wh', 't will h', 've so will']. For loop will print the elements of the list.

c. ['Wh', 't will h', 've so will']

d. What will have so will

Your answer is correct.

The correct answer is:
Wh t will h ve so will

Question 2 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
my_string = 'vijay'
for i in range(len(my_string)):
    print (my_string)
    my_string = 'a'
```

a. vaaaaaaaaaaa

b. vijay a a a a ✔ String is modified only after 'vijay' has been printed once.

c. None

d. Error

Your answer is correct.

The correct answer is:
vijay a a a a

Question 3 | Correct Mark 1.00 out of 1.00

What is the output of the following?

```
i = 0
while i < 3:
        print(i)
        i += 1
else:
        print(0)
```

a. 0 1 2

b. 0 1 2 0 ✔

c. 0 1 2 3 0

d. Error

Your answer is correct.

The correct answer is:
0 1 2 0

Question 4 | Correct Mark 1.00 out of 1.00

Which of the following is False?

a. capitalize() function in string is used to return a string by converting the whole given string into uppercase. ✔ capitalize() function in string gives the output by converting only the first character of the string into uppercase and rest characters into lowercase.However, upper() function is used to return the whole string into uppercase.

b. None of the mentioned

c. lower() function in string is used to return a string by converting the whole given string into lowercase.

d. String is immutable.

Your answer is correct.

The correct answer is:
capitalize() function in string is used to return a string by converting the whole given string into uppercase.

Question 5 | Correct Mark 1.00 out of 1.00

```
Which of the following will give "Vijay" as output?
```

```
str1="John,Vijay,Aryan"
```

a. print(str1[-7:-11])

b. print(str1[-11:-6]) ✔ Slicing takes place at one index position less than the given second index position of the string. So,second index position will be -7+1=-6.

c. print(str1[-11:-7])

d. print(str1[-7:-12])

Your answer is correct.

The correct answer is:
print(str1[-11:-6])

Question 6 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
str1="123456789"
print(str1[2:6:2])
```

Answer: 35 ✔

The correct answer is: 35

Question 7 | Correct Mark 1.00 out of 1.00

What will be the output of below Python code?

```
str1="Application"
str2=str1.replace('a','A')
print(str2)
```

Answer: Application ✔

replace() function in string is used here to replace all the existing "a" by "A" in the given string.

The correct answer is: ApplicAtion

Question 8 | Correct Mark 1.00 out of 1.00

What will following Python code return?

```
str1="Stack of books"
print(len(str1))
```

a. 16

b. 13

c. 14 ✔ len() returns the length of the given string str1, including spaces and considering " " as a single character.

d. 15

Your answer is correct.

The correct answer is:
14

Question 9 | Incorrect Mark 0.00 out of 1.00

What will be the output of below Python code?

```
str1="Information"
print(str1[2:8])
```

Answer: forma ✖

The correct answer is: format

Question 10 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
str1="vijay"
print(str1.capitalize())
```

Answer: Vijay ✔

The correct answer is: Vijay

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
print(ord('C'))
```

Answer: 67 ✔

The correct answer is: 67

Question 12 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
str1='vijayakumar'
str2='.'
str3='---'
print(str1[-1:])
```

a. None of the above

b. ramukayajiv

c. 'r' ✔

d. vijayakuma

Your answer is correct.

The correct answer is:

'r'

Question 13 | Correct Mark 1.00 out of 1.00

```
Which of the following will result in an error?
```

```
str1="python"
```

a. str1[1]="x" ✔ Strings are immutable. So,new values cannot be assigned at any index position in a string

b. None of the mentioned

c. print(str1[2])

d. print(str1[0:9])

Your answer is correct.

The correct answer is:
str1[1]="x"

Question 14 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code?

```
print('Ab!2'.swapcase())
```

a. aB1@

b. ab12 ✖

c. AB!@

d. aB!2

Your answer is incorrect.

The correct answer is:
aB!2

Question 15 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
str1="vijay"
for i in str1:
  print(i, end="")
```

a. None of the above

b. 01234

c. vijay ✔

d. No output

Your answer is correct.

The correct answer is:
vijay

Started on	Wednesday, 26 August 2026, 1:03 PM
State	Finished
Completed on	Wednesday, 26 August 2026, 1:07 PM
Time taken	3 mins 59 secs
Marks	13.00/15.00
Grade	**86.67** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
my_string = 'arvijayakumar'
for i in range(my_string):
    print(i)
```

a. 0 1 2 3 ... 12

1.

b. arvjayakumar

c. Error ✔ ***range(str)*** is not allowed.

d. None

Your answer is correct.

The correct answer is:
Error

Question 2 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code?

```
my_string = "arvjayakumar"
i = "i"
while i in my_string:
    print(i, end =" ")
```

a. a r v j a y a k u m a r

b. arvjayakumar

c. i i i i i i . . . ✖

d. None

Your answer is incorrect.

The correct answer is:
None

Question 3 | Correct Mark 1.00 out of 1.00

What is the output of the following code ?

```
example = "snow world"
example[3] = 's'
print example
```

a. snow world

b. snos world

c. Error ✔ Strings cannot be modified

d. snow

Your answer is correct.

The correct answer is:
Error

Question 4 | Correct Mark 1.00 out of 1.00

What is the output of the following code ?

```
example = "arvijayakumar"
example[0] = 'A'
print example
```

a. A

b. arvijayakumar

c. Error ✔ Strings cannot be modified

d. Arvijayakumar

Your answer is correct.

The correct answer is:
Error

Question 5 | Correct Mark 1.00 out of 1.00

What will the below Python code will return?

```
str1="save paper,save plants"
str1.find("save")
```

a. It returns the last index position of the first occurance of "save" in the given string str1.

b. It returns the last index position of the last occurance of "save" in the given string str1.

c. It returns the first index position of the last occurance of "save" in the given string str1.

d. It returns the first index position of the first occurance of "save" in the given string str1. ✔ It returns the first index position of the first occurance of "save" in the given string str1.

Your answer is correct.

The correct answer is:
It returns the first index position of the first occurance of "save" in the given string str1.

Question 6 | Correct Mark 1.00 out of 1.00

What is the index value of ‘i’ in string “Learning”

- a. 5 ✔
- b. 3
- c. 7
- d. 6

Your answer is correct.

The correct answer is:
5

Question 7 | Incorrect Mark 0.00 out of 1.00

```
my_string = "arvjayakumar"
i = "i"
while i in my_string:
    print(i, end =" ")
```

- a. i i i i i i . . . ✖
- b. arvjayakumar
- c. a r v j a y a k u m a r
- d. None

Your answer is incorrect.

The correct answer is:
None

Question 8 | Correct Mark 1.00 out of 1.00

Python considered the character enclosed in triple quotes as String.

Select one:

- True ✔
- False

The correct answer is 'True'.

Question 9 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
line = "I'll come by then."
eline = ""
for i in line:
    eline += chr(ord(i)+3)
print(eline)
```

a. L*oo frph e| wkhq1

b. l*oo@frph@e|$wkhq1

c. O*oo#Frph#E|#wKhq1

d. L*oo#frph#e|#wkhq1 ✔ This piece of code ciphers the plain text. Each character is moved to its 3rd next character by increasing the ascii value. 'l' becomes 'L', thus option (c) and (d) are ruled out. ' ' has ascii value of 32, thus it'll become 35('#'), thus option (a) is ruled out as, ' ' can not remain to be ' ' in the ciphered text.

Your answer is correct.

The correct answer is:
L*oo#frph#e|#wkhq1

Question 10 | Correct Mark 1.00 out of 1.00

What will be the output of the following code?

```
a = 'ab'
b = 4
print(a*b)
```

Answer: abababab ✔

The correct answer is: abababab

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
print('ab cd ef'.title())
```

a. Ab cd ef

b. Ab Cd Ef ✔

c. None of the mentioned

d. Ab cd eF

Your answer is correct.

The correct answer is:
Ab Cd Ef

Question 12 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
str1="vijay"
for i in range(len(str1),6):
    print(i)
```

a. y

b. 5 ✔

c. vijay

d. None of the above

Your answer is correct.

The correct answer is:
5

Question 13 | Correct Mark 1.00 out of 1.00

What is the output of “Vijay”+1+2+3 ?

a. Vijay6

b. Vijay

c. Vijay123

d. Error ✔ Cannot concantenate str and int objects.

Your answer is correct.

The correct answer is:
Error

Question 14 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
print(ord('D'))
```

Answer: 68 ✔

The correct answer is: 68

Question 15 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
print(ord('B'))
```

Answer: 66 ✔

The correct answer is: 66

Started on	Wednesday, 26 August 2026, 1:07 PM
State	Finished
Completed on	Wednesday, 26 August 2026, 1:11 PM
Time taken	4 mins 27 secs
Marks	14.00/15.00
Grade	**93.33** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

What is the output of “hello”+1+2+3 ?

a. hello6

b. hello

c. Error ✔ Cannot concantenate str and int objects.

d. hello123

Your answer is correct.

The correct answer is:
Error

Question 2 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
str1="vijay"
for i in range(len(str1)):
  print(i, end="")
```

a. 01234 ✔

b. vijay

c. None of the above

d. No output

Your answer is correct.

The correct answer is:
01234

Question 3 | Correct Mark 1.00 out of 1.00

What arithmetic operators cannot be used with strings in Python?

a. *

b. - ✔

c. All of the mentioned

d. +

Your answer is correct.

The correct answer is:

-

Question 4 | Correct Mark 1.00 out of 1.00

What is the output of the following code ?

```
str = "Welcome"
str[2] = 'a'
print(str)
```

a. Weacome

b. aWelcome

c. Error ✔ Strings cannot be modified

d. Welcomea

Your answer is correct.

The correct answer is:

Error

Question 5 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
str1="6/4"
print("str1")
```

Answer: str1 ✔

Explanation: Since in print statement, str1 is written inside double quotes so it will simply print str1 directly.

The correct answer is: str1

Question 6 | Correct Mark 1.00 out of 1.00

What will be the output of below Python code?

```
str1="poWer"
str1.upper()
print(str1)
```

Answer: poWer ✔

str1.upper() returns the uppercase of whole string str1. However,it doesnot change the string str1. So, output will be the original str1.

The correct answer is: poWer

Question 7 | Correct Mark 1.00 out of 1.00

What is the output of the following code ?

```
print('raining'. find('z'))
```

a. Not Found

b. ''

c. -1 ✔

d. Type error

Your answer is correct.

The correct answer is:
-1

Question 8 | Correct Mark 1.00 out of 1.00

Strings are immutable?

Select one:

- True ✔
- False

The correct answer is 'True'.

Question 9 | Correct Mark 1.00 out of 1.00

What is the output of the following code?

```
print("rec. VIJAY".capitalize())
```

a. REC. VIJAY

b. rec. vijay

c. Rec. vijay ✔

d. Rec. Vijay

Your answer is correct.

The correct answer is:
Rec. vijay

Question 10 | Correct Mark 1.00 out of 1.00

What will be the output of the following code?

```
a = '2'
b = 4
print(a*b)
```

Answer: 2222 ✔

The correct answer is: 2222

Question 11 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

```
str1="arvijayakumar"
print(str1[::-1])
```

Answer: ramukayajivra ✔

The correct answer is: ramukayajivra

Question 12 | Correct Mark 1.00 out of 1.00

What will be the output of the following code?

```
a = '2'
b = '1'
print(a+b)
```

Answer: 21 ✔

The correct answer is: 21

Question 13 | Incorrect Mark 0.00 out of 1.00

What is the output of the following code?

```
print('*', "abcde".center(7), '*', sep='')
```

a. * abcde *

b. * abcde* ✖

c. *abcde *

d. *abcde*

Your answer is incorrect.

The correct answer is:
* abcde *

Question 14 | Correct Mark 1.00 out of 1.00

What is the output of the following Code?

print(chr(69))

Answer: E ✔

The correct answer is: E

Question 15 | Correct Mark 1.00 out of 1.00

What is the output of the following?

```
my_string = 'arvijayakumar'
for i in range(len(my_string)):
        my_string[i].upper()
print (my_string)
```

- a. arvijayakumar ✔
- b. Error
- c. ARVIJAYAKUMAR
- d. None

Your answer is correct.

The correct answer is:
arvijayakumar

Started on	Wednesday, 30 September 2026, 9:42 PM
State	Finished
Completed on	Wednesday, 30 September 2026, 11:00 PM
Time taken	1 hour 18 mins
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given an array A of sorted integers and another non negative integer k, find if there exists 2 indices i and j such that A[i] - A[j] = k, i != j.

Input Format

1. First line is number of test cases T. Following T lines contain:
2. N, followed by N integers of the array
3. The non-negative integer k

Output format

Print 1 if such a pair exists and 0 if it doesn't.

Example

Input

1

3

1

3

5

4

Output:

1

Input

1

3

1

3

5

99

Output

0

For example:

Input	Result
1 3 1 3 5 4	1
1 3 1 3 5 99	0

Answer: (penalty regime: 0 %)

```
a=int(input())
while(a>0):
```

```
    b=int(input())
    l=[]
    for i in range(b):
        l.append(int(input()))
    f=0
    k=int(int(input()))
    for i in range(b):
        for j in range(b):
            if(i!=j and l[i]-l[j]==k):
                f=1
                break
    print(f)
    a-=1
```

	Input	Expected	Got	
✔	1 3 1 3 5 4	1	1	✔
✔	1 3 1 3 5 99	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an integer n, return an list of length n + 1 such that for each i (0 <= i <= n), ans[i] is the number of 1's in the binary representation of i.

Example:

```
Input: n = 2
Output: [0,1,1]
Explanation:
0 --> 0
1 --> 1
2 --> 10
```

Example2:

```
Input: n = 5
Output: [0,1,1,2,1,2]
Explanation:
0 --> 0
1 --> 1
2 --> 10
3 --> 11
4 --> 100
5 --> 101
```

Note: Complete the given function alone

For example:

Test	Result
print(CountingBits(5))	[0, 1, 1, 2, 1, 2]

Answer: (penalty regime: 0 %)

Reset answer

```
def CountingBits(n):
    ans=[]
    for i in range(n+1):
        ans.append(bin(i).count('1'))
    return ans
```

	Test	Expected	Got	
✔	print(CountingBits(2))	[0, 1, 1]	[0, 1, 1]	✔
✔	print(CountingBits(5))	[0, 1, 1, 2, 1, 2]	[0, 1, 1, 2, 1, 2]	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Given two arrays of positive integers, for each element in the second array, find the total number of elements in the first array which are *less than or equal to* that element. Store the values determined in an array.

For example, if the first array is *[1, 2, 3]* and the second array is *[2, 4]*, then there are *2* elements in the first array *less than or equal to 2.* There are *3* elements in the first array which are *less than or equal to 4*. We can store these answers in an array, *answer = [2, 3]*.

Program Description

The program must return an array of *m* positive integers, one *for each maxes[i]* representing the total number of elements *nums[j]* satisfying *nums[j] ≤ maxes[i]* where *0 ≤ j < n* and *0 ≤ i < m,* in the given order.

The program has the following:

nums[nums[0],...nums[n-1]]: first array of positive integers

maxes[maxes[0],...maxes[n-1]]: second array of positive integers

Constraints

- $2 \le n, m \le 10^5$
- $1 \le nums[j] \le 10^9$, where $0 \le j < n$.
- $1 \le maxes[i] \le 10^9$, where $0 \le i < m$.

Input Format For Custom Testing

Input from stdin will be processed as follows and passed to the program.

The first line contains an integer *n*, the number of elements in *nums*.
The next *n* lines each contain an integer describing *nums[j]* where *0 ≤ j < n.*
The next line contains an integer *m*, the number of elements in *maxes*.
The next *m* lines each contain an integer describing *maxes[i]* where *0 ≤ i < m.*

Sample Case 0

Sample Input 0

```
4
1
4
2
4
2
3
5
```

Sample Output 0

```
2
4
```

Explanation 0

We are given *n = 4*, *nums = [1, 4, 2, 4]*, *m = 2*, and *maxes = [3, 5]*.

1. For *maxes[0] = 3*, we have *2* elements in *nums* (*nums[0] = 1* and *nums[2] = 2*) that are ≤ *maxes[0]*.
2. For *maxes[1] = 5*, we have *4* elements in *nums* (*nums[0] = 1*, *nums[1] = 4*, *nums[2] = 2*, and *nums[3] = 4*) that are ≤ *maxes[1]*.

Thus, the program returns the array *[2, 4]* as the answer.

Sample Case 1

Sample Input 1

```
5
2
10
5
4
8
4
3
1
7
8
```

Sample Output 1

```
1
0
3
4
```

Explanation 1

We are given, *n = 5*, *nums = [2, 10, 5, 4, 8]*, *m = 4*, and *maxes = [3, 1, 7, 8]*.

1. For *maxes[0] = 3*, we have *1* element in *nums* (*nums[0] = 2*) that is ≤ *maxes[0]*.
2. For *maxes[1] = 1*, there are *0* elements in *nums* that are ≤ *maxes[1]*.
3. For *maxes[2] = 7*, we have *3* elements in *nums* (*nums[0] = 2*, *nums[2] = 5*, and *nums[3] = 4*) that are ≤ *maxes[2]*.
4. For *maxes[3] = 8*, we have *4* elements in *nums* (*nums[0] = 2*, *nums[2] = 5*, *nums[3] = 4*, and *nums[4] = 8*) that are ≤ *maxes[3]*.

Thus, the program returns the array *[1, 0, 3, 4]* as the answer.

Answer: (penalty regime: 0 %)

```
n=int(input())

nums=[int(input()) for i in range(n)]
m=int(input())
maxes=[int(input()) for i in range(m)]

for x in maxes:
    count=len([num for num in nums if num <= x])
    print(count)
```

	Input	Expected	Got	
✔	4 1 4 2 4 2 3 5	2 4	2 4	✔
✔	5 2 10 5 4 8 4 3 1 7 8	1 0 3 4	1 0 3 4	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

An array is monotonic if it is either **monotone increasing** or **monotone decreasing**.
An array A is monotone increasing if for all i <= j, **A[i] <= A[j]**. An array A is monotone decreasing if for all i <= j, **A[i] >= A[j]**.

Write a program if n array is monotonic or not. Print "True" if is monotonic or "False" if it is not. Array can be monotone increasing or decreasing.

Input Format:

First line n-get number of elements

Next n Lines is the array of elements

Output Format:

True ,if array is monotone increasing or decreasing.

otherwise False is printed

Sample Input1

4

5

6

7

8

Sample Output1

True

Sample Input2

4

6

5

4

3

Sample Output2

True

Sample Input 3

4

6

7

8

7

Sample Output3

False

For example:

Input	Result
4 6 5 4 3	True

Answer: (penalty regime: 0 %)

```
a=int(input())
```

```
l=[]
for i in range(a):
    l.append(int(input()))
l1=sorted(l)
l2=l1[::-1]
f=0
if(l==l1):
    f=1
elif(l==l2):
    f=1
if(f):
    print('True')
else:
    print('False')
```

	Input	Expected	Got	
✔	4 6 5 4 3	True	True	✔
✔	4 3 5 7 4	False	False	✔
✔	4 1 6 9 2	False	False	✔
✔	4 9 6 4 2	True	True	✔
✔	3 2 1 4	False	False	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Determine the factors of a number (i.e., all positive integer values that evenly divide into a number) and then return the pth element of the list, sorted ascending. If there is no p^{th} element, return 0.

Example

n = 20

p = 3

The factors of 20 in ascending order are {1, 2, 4, 5, 10, 20}. Using 1-based indexing, if p = 3, then 4 is returned. If p > 6, 0 would be returned.

Constraints

$1 \le n \le 10^{15}$

$1 \le p \le 10^{9}$

The first line contains an integer n, the number to factor.

The second line contains an integer p, the 1-based index of the factor to return.

Sample Case 0

Sample Input 0

10

3

Sample Output 0

5

Explanation 0

Factoring n = 10 results in {1, 2, 5, 10}. Return the p = 3rd factor, 5, as the answer.

Sample Case 1

Sample Input 1

10

5

Sample Output 1

0

Explanation 1

Factoring n = 10 results in {1, 2, 5, 10}. There are only 4 factors and p = 5, therefore 0 is returned as the answer.

Sample Case 2

Sample Input 2

1

1

Sample Output 2

1

Explanation 2

Factoring n = 1 results in {1}. The p = 1st factor of 1 is returned as the answer.

For example:

Input	Result
10 3	5
10 5	0

Input	Result
1 1	1

Answer: (penalty regime: 0 %)

```
n=int(input())
p=int(input())
list=[]

for i in range(1,n+1):
    if n%i == 0:
        list.append(i)

if p <= len(list):
    print(list[p-1])
else:
    print(0)

```

	Input	Expected	Got	
✔	10 3	5	5	✔
✔	10 5	0	0	✔
✔	1 1	1	1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Complete the program to count frequency of each element of an array. Frequency of a particular element will be printed once.

Sample Test Cases

Test Case 1

Input

7
23
45
23
56
45
23
40

Output

23 occurs 3 times
45 occurs 2 times
56 occurs 1 times
40 occurs 1 times

Answer: (penalty regime: 0 %)

```
n=int(input())

elements=[]
for n in range(n):
    elements.append(int(input()))
frequency={}
for m in elements:
    if m in frequency:
        frequency[m] += 1
    else:
        frequency[m] = 1

for m, count in frequency.items():
    print(f"{m} occurs {count} times")
```

	Input	Expected	Got	
✔	7 23 45 23 56 45 23 40	23 occurs 3 times 45 occurs 2 times 56 occurs 1 times 40 occurs 1 times	23 occurs 3 times 45 occurs 2 times 56 occurs 1 times 40 occurs 1 times	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Program to print all the distinct elements in an array. Distinct elements are nothing but the unique (non-duplicate) elements present in the given array.

Input Format:

First line take an Integer input from stdin which is array length n.

Second line take n Integers which is inputs of array.

Output Format:

Print the Distinct Elements in Array in single line which is space Separated

Example Input:

5

1

2

2

3

4

Output:

1 2 3 4

Example Input:

6

1

1

2

2

3

3

Output:

1 2 3

For example:

Input	Result
5 1 2 2 3 4	1 2 3 4
6 1 1 2 2 3 3	1 2 3

Answer: (penalty regime: 0 %)

```
1 a=int(input())
```

```
L1=[]
for i in range(a):
    L1.append(int(input()))
L2=[]
for i in range(a):
    if L1[i] not in L2:
        L2.append(L1[i])
for i in range(len(L2)):
    print(L2[i],end=' ')
```

	Input	Expected	Got	
✔	5 1 2 2 3 4	1 2 3 4	1 2 3 4	✔
✔	6 1 1 2 2 3 3	1 2 3	1 2 3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

The program must accept **N** integers and an integer **K** as the input. The program must print every K integers in descending order as the output.

-

Note: If **N % K != 0**, then sort the final N%K integers in descending order.

Boundary Condition(s):

1 <= N <= 10^4
-99999 <= Array Element Value <= 99999

Input Format:

The first line contains the values of N and K separated by a space.
The second line contains N integers separated by space(s).

Output Format:

The first line contains N integers.

Example Input/Output 1:

Input:

7 3
48 541 23 68 13 41 6

Output:

541 48 23 68 41 13 6

Explanation:

The first three integers are 48 541 23, after sorting in descending order the integers are **541 48 23**.
The second three integers are 68 13 41, after sorting in descending order the integers are **68 41 13**.
The last integer is **6**.
The integers are **541 48 23 68 41 13 6**
Hence the output is **541 48 23 68 41 13 6**.

Answer: (penalty regime: 0 %)

```
n, k = map(int,input().split())
arr=list(map(int, input().split()))
result=[]
for i in range(0, n, k):
    t=arr[i: i+k]

    if len(t)==k:
        t.sort(reverse=True)

    result.extend(t)
print(*(result))
```

	Input	Expected	Got	
✔	7 3 48 541 23 68 13 41 6	541 48 23 68 41 13 6	541 48 23 68 41 13 6	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Given a matrix mat where every row is sorted in **strictly increasing** order, return the **smallest common element** in all rows.

If there is no common element, return -1.

Example 1:

Input:

4 5

1 2 3 4 5

2 4 5 8 10

3 5 7 9 11

1 3 5 7 9

Output:

5

Constraints:

- 1 <= mat.length, mat[i].length <= 500
- 1 <= mat[i][j] <= 10^4
- mat[i] is sorted in strictly increasing order.

Answer: (penalty regime: 0 %)

```
r,c=map(int,input().split())
mat=[]
for i in range(r):
    mat.append(list(map(int,input().split())))
    for ca in mat[0]:
        co=0
        for row in mat:
            if ca in row:
                co+=1
        if co == r:
            print(ca)
            break

```

	Input	Expected	Got	
✔	4 5 1 2 3 4 5 2 4 5 8 10 3 5 7 9 11 1 3 5 7 9	5	5	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Assume you have an array of length ***n*** initialized with all **0**'s and are given ***k*** update operations.

Each operation is represented as a triplet: **[startIndex, endIndex, inc]** which increments each element of subarray **A[startIndex ... endIndex]** (startIndex and endIndex inclusive) with **inc**.

Return the modified array after all ***k*** operations were executed.

Example:

Input:

5

3

1 3 2

2 4 3

0 2 -2

Output:

-2 0 3 5 3

Explanation:

Initial state:

length = 5, updates = [[1,3,2],[2,4,3],[0,2,-2]]

[0,0,0,0,0]

After applying operation [1,3,2]:

[0,2,2,2,0]

After applying operation [2,4,3]:

[0,2,5,5,3]

After applying operation [0,2,-2]:

[-2,0,3,5,3]

Answer: (penalty regime: 0 %)

```
a=int(input())
l=[]
for i in range(a):
    l.append(0)
b=int(input())
while(b>0):
    l1=[]
    l1=list(map(int,input().split()))
    for i in range(l1[0],l1[1]+1):
        l[i]=l[i]+l1[2]

    b-=1
for i in range(a):
    print(l[i],end=' ')

```

	Input	Expected	Got	
✔	5 3 1 3 2 2 4 3 0 2 -2	-2 0 3 5 3	-2 0 3 5 3	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Wednesday, 30 September 2026, 11:03 PM
State	Finished
Completed on	Wednesday, 30 September 2026, 11:07 PM
Time taken	4 mins 20 secs

Question 1 | Complete Marked out of 1.00

Find the output?

list1 = list('REC_CSE_ECE')

print('r' not in list1)

- a. true
- b. True
- c. False
- d. false

Question 2 | Complete Marked out of 1.00

Suppose list1 is [3, 4, 5, 20, 5, 25, 1, 3], what is list1 after list1.reverse()?

- a. [3, 4, 5, 20, 5, 25, 1, 3]
- b. [3, 1, 25, 5, 20, 5, 4, 3]
- c. [1, 3, 3, 4, 5, 5, 20, 25]

Question 3 | Complete Marked out of 1.00

Write the output of the following:

list1=[3,2,5,7,3,6]

```
list1.remove(3)
print(sum(list1))
```

- a. 19
- b. 23
- c. 20

Question 4 | Complete Marked out of 1.00

Find the output?

```
list3=[]
list1 ='REC_CSE_ECE'
list2= list1.split('_')
for i in list2:
    list3.extend(i)
print(len(list3))
```

a. 3
b. 12
c. 9
d. 11

Question 5 | Complete Marked out of 1.00

Find the output?

```
list1 = [1, 2, 3, 4,1,2,3]
print(list1.pop())
```

a. 2
b. 3
c. [ ]
d. 1

Question 6 | Complete Marked out of 1.00

Choose a correct statement

a. List is data structure in python used to store the sequence of various types.
b. List is data structure in python used to store the sequence of same types.
c. List are immutable
d. ( ) is used to represent the list

Question 7 | Complete Marked out of 1.00

Write the output of the following :

```
D = [1,2,3]
D1 = D
D.append(4)
print(D1)
```

Answer: [1,2,3,4]

Question 8 | Complete Marked out of 1.00

1. `>>>list1 = [1, 3]`
2. `>>>list2 = list1`
3. `>>>list1[0] = 4`
4. `>>>print(list2)`

Answer: [4,3]

Question 9 | Complete Marked out of 1.00

What will be the output after the following statements?
m = [5, 10, 35]
del m[:]
print(m)

- a. [5, 35]
- b. [5, 10, 35]
- c. []
- d. 5, 10, 35

Question 10 | Complete Marked out of 1.00

what is correct syntax to copy one list into another list?

- a. listA = listB[:]
- b. listA = list(listB)
- c. listA = listB[]
- d. listA = listB[ ]()

Started on	Monday, 5 October 2026, 6:42 PM
State	Finished
Completed on	Monday, 5 October 2026, 6:48 PM
Time taken	5 mins 49 secs

Question 1 | Complete Marked out of 1.00

```
list1 = [1, 2, 3, 4,1,2,3,1]
list2 = list1.copy()
list1.clear()
print(list2)
```

Find the output?

- a. [1, 2, 3, 4, 1, 2, 3, 1]
- b. [ ]
- c. [1, 2, 3, 4]
- d. [1, 1, 2, 2, 3, 3, 4,]

Question 2 | Complete Marked out of 1.00

Find the output?

list1 = [1, 2, 3, 4,1,2,3]

list1.sort()

list1.pop()

list1.reverse()

print(list1)

- a. [4, 3, 3, 2, 2, 1, 1]
- b. [3, 3, 2, 2, 1, 1]
- c. [4, 3, 3, 2, 2, 1]
- d. [3, 2, 1, 3, 2, 1]

Question 3 | Complete Marked out of 1.00

Find the output?

```
list3=[]
list1 ='REC_CSE_ECE'
list2= list1.split('_')
for i in list2:
    list3.extend(i)
print(list3)
```

- a. ['R', 'E', 'C', 'C', 'S', 'E', 'E', 'C', 'E']
- b. ['REC', 'CSE', 'ECE']
- c. ['REC_CSE_ECE']
- d. Error

Question 4 | Complete Marked out of 1.00

```
L=["Amit","Sumit","Naina"]
L1=["Sunil"]
print(L + L1)
```

- a. **List can not concatenate**
- b. **['Amit' , 'Sumit' , 'Naina' , 'Sunil']**
- c. **['Amit' , 'Sumit' , 'Naina' , ['Sunil']]**

Question 5 | Complete Marked out of 1.00

```
L=[1,5,9]
print(sum(L),max(L),min(L))
```

Answer: 15 9 1

Question 6 | Complete Marked out of 1.00

Find the output?

```
list1 = [1, 2, 3, 4]
list1.append([5,6,7,8])
print(list1)
```

a. [1,2,3,4,5,6,7,8]

b. [1,2,3,4][5,6,7,8]

c. [1,2,3,4,[5,6,7,8]]

d. [1,2,3,4]

Question 7 | Complete Marked out of 1.00

Suppose listExample is ['h','e','l','l','o'], what is len(listExample)?

a. 4

b. Error

c. 5

Question 8 | Complete Marked out of 1.00

What will be the output after the following statements?

```
m = 'A'
n = 'B'
o = 'C'
p = [m, n, o]
print(p)
```

a. ['C', 'B', 'A']

b. ['A', 'B', 'C']

c. 'C', 'A', 'B'

d. ['C', 'A', 'B']

Question 9 | Complete Marked out of 1.00

What is the output of the following code?

```
list1 = ["hi", "we", "are", "the", "elements", "in", "a", "list"]
for i in list1:
    print(list1[i])
```

a. hi we are the elements in a list

b. hi

c. error

d. hi hi hi hi hi hi hi hi

Question 10 | Complete Marked out of 1.00

Write the output of the following :

```
L = ['Amit', 'anita', 'Sumant', 'Zaid']
print(max(L))
```

Answer: anita

Started on	Monday, 5 October 2026, 6:48 PM
State	Finished
Completed on	Monday, 5 October 2026, 6:53 PM
Time taken	4 mins 53 secs

Question 1 | Complete Marked out of 1.00

Which of the following can add only one value to a list?

a. push()
b. add()
c. extend()
d. append()

Question 2 | Complete Marked out of 1.00

Write the output of the following :

```
def listchange(L):
L.append(45)
return
L1 = [1, 2, 3, 4]
listchange(L1)
print(L1)
```

Answer: [1,2,3,4,45]

Question 3 | Complete Marked out of 1.00

What will be the output after the following statements?

```
m = [10, 25, 35]
n = sum(m)
print(n)
```

a. 35
b. 70
c. 10
d. 25

Question 4 | Complete Marked out of 1.00

In the given program if extend() is used instead of append() than what will be the output?

```
list1 = [1, 2, 3, 4]
list1.append([5,6,7,8])
print(list1)
```

a. [1,2,3,4][5,6,7,8]

b. [1,2,3,4,[5,6,7,8]]

c. [1,2,3,4]

d. [1,2,3,4,5,6,7,8]

Question 5 | Complete Marked out of 1.00

What will be the output after the following statements?
m = ['Games', 'in', 'Python']
n = 'Play' + m[0] + m[1] + m[2]
print(n)

a. Games in Python

b. Play Games in Python

c. PlayGamesinPython

d. GamesinPython

Question 6 | Complete Marked out of 1.00

1. `def f(values):`
2. `    values[0] = 44`
3. `v = [1, 2, 3]`
4. `f(v)`
5. `print(v)`

Answer: [44,2,3]

Question 7 | Complete Marked out of 1.00

What will be the output after the following statements?
m = [75, 23, 64]
n = m[0] + m[1]
print(n)

a. 75
b. 98
c. 64
d. 23

Question 8 | Complete Marked out of 1.00

To find the last element of list namely 'list1' in Python, _____ will be used.

a. list1[0]
b. list1[-1]
c. list1[pos]
d. list1[:-1]

Question 9 | Complete Marked out of 1.00

Find the output?

```
list3=[]
list1 ='REC_CSE_ECE'
list2= list1.split('_')
for i in list2:
    list3.extend(i)
print(list3)
```

a. ['REC', 'CSE', 'ECE']
b. Error
c. ['REC_CSE_ECE']
d. ['R', 'E', 'C', 'C', 'S', 'E', 'E', 'C', 'E']

Question 10 | Complete Marked out of 1.00

Find the output?

```
list1 = [1, 2, 3, 4,1,2,3,1]
list2 = list1
list1.clear()
print(list2)
```

a. [1, 2, 3, 4]

b. [ ]

c. [1, 2, 3, 4, 1, 2, 3, 1]

d. [1, 1, 2, 2, 3, 3, 4,]


Started on	Monday, 5 October 2026, 8:56 PM
State	Finished
Completed on	Tuesday, 6 October 2026, 12:58 PM
Time taken	16 hours 2 mins
Marks	5.00/5.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Given an array of strings `words`, return *the words that can be typed using letters of the alphabet on only one row of American keyboard like the image below.*

In the **American keyboard**:

- the first row consists of the characters `"qwertyuiop"`,
- the second row consists of the characters `"asdfghjkl"`, and
- the third row consists of the characters `"zxcvbnm"`.

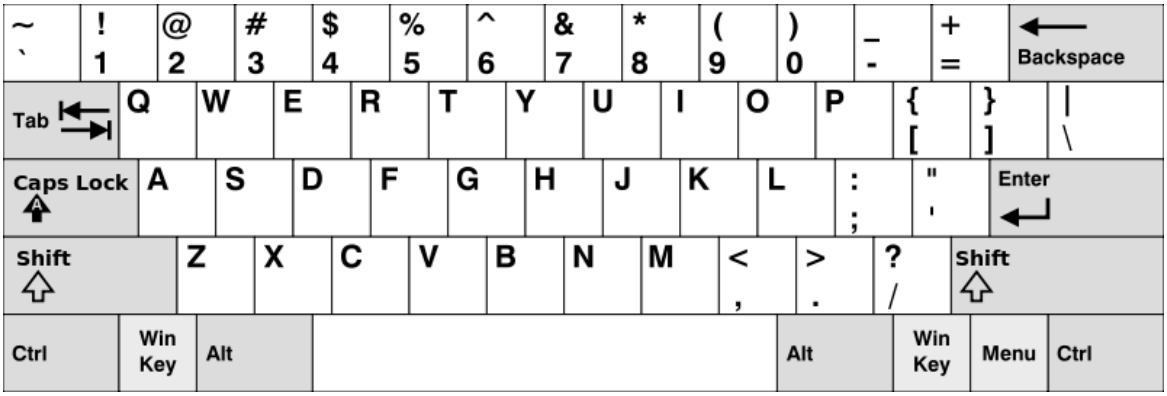

Example 1:

```
Input: words = ["Hello","Alaska","Dad","Peace"]
Output: ["Alaska","Dad"]
```

Example 2:

```
Input: words = ["omk"]
Output: []
```

Example 3:

```
Input: words = ["adsdf","sfd"]
Output: ["adsdf","sfd"]
```

For example:

Input	Result
4 Hello Alaska Dad Peace	Alaska Dad
2 adsfd afd	adsfd afd

Answer: (penalty regime: 0 %)

```
n=int(input())
rows=(set("qwertyuiop"),set("asdfghjkl"),set("zxcvbnm"))
f=False
for i in range(n):
    word=input().replace(",","").replace(" ","")
    w=set(word.lower())

    for row in rows:
        if w <= row:
            print(word)
```

```
            f=True
            break
if not f:
    print("No words")
```

	Input	Expected	Got	
✔	4 Hello Alaska Dad Peace	Alaska Dad	Alaska Dad	✔
✔	1 omk	No words	No words	✔
✔	2 adsfd afd	adsfd afd	adsfd afd	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

There is a malfunctioning keyboard where some letter keys do not work. All other keys on the keyboard work properly.

Given a string text of words separated by a single space (no leading or trailing spaces) and a string brokenLetters of all distinct letter keys that are broken, return the number of words in text you can fully type using this keyboard.

Example 1:

Input: text = "hello world", brokenLetters = "ad"

Output:

1

Explanation: We cannot type "world" because the 'd' key is broken.

For example:

Input	Result
hello world ad	1
Faculty Upskilling in Python Programming ak	2

Answer: (penalty regime: 0 %)

```
text=input().strip()
brokenletter=input().strip()
words=tuple(text.split())
broken=set(brokenletter.lower())

c=0
for word in words:
    if set(word.lower()).isdisjoint(broken):
        c+=1
print(c)
```

	Input	Expected	Got	
✔	hello world ad	1	1	✔
✔	Welcome to REC e	1	1	✔
✔	Faculty Upskilling in Python Programming ak	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

A sentence is a list of words that are separated by a single space with no leading or trailing spaces. Each word consists of lowercase and uppercase English letters.

A sentence can be shuffled by appending the 1-indexed word position to each word then rearranging the words in the sentence.

For example, the sentence "This is a sentence" can be shuffled as "sentence4 a3 is2 This1" or "is2 sentence4 This1 a3".

Given a shuffled sentence s containing no more than 9 words, reconstruct and return the original sentence.

Example 1:

Input:

is2 sentence4 This1 a3

Output:

This is a sentence

Explanation: Sort the words in s to their original positions "This1 is2 a3 sentence4", then remove the numbers.

Example 2:

Input:

Myself2 Me1 I4 and3

Output:

Me Myself and I

Explanation: Sort the words in s to their original positions "Me1 Myself2 and3 I4", then remove the numbers.

Constraints:

2 <= s.length <= 200

s consists of lowercase and uppercase English letters, spaces, and digits from 1 to 9.

The number of words in s is between 1 and 9.

The words in s are separated by a single space.

s contains no leading or trailing spaces.

Answer: (penalty regime: 0 %)

```
s=input()
words=s.split()
words.sort(key=lambda x:int(x[-1]))
print(" ".join(word[:-1] for word in words))
```

	Input	Expected	Got	
✔	is2 sentence4 This1 a3	This is a sentence	This is a sentence	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Given a number, convert it into corresponding alphabet.

Input	Output
1	A
26	Z
27	AA
676	YZ

Input Format

Input is an integer

Output Format

Print the alphabets

Constraints

1 <= num <= 4294967295

Sample Input 1

26

Sample Output 1

Z

For example:

Test	Result
`print(excelNumber(26))`	Z

Answer: (penalty regime: 0 %)

Reset answer

```
def excelNumber(n):
    result=""
    while n>0:
        n-=1
        result=chr(65+n%26)+result
        n//=26

    return result
```

	Test	Expected	Got	
✔	`print(excelNumber(26))`	Z	Z	✔
✔	`print(excelNumber(27))`	AA	AA	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

The program must accept a string S which represents a series of keystrokes as the input. There are two special keystrokes denoted by "^z" for undo operation and "^y" for redo operation. The undo operation removes the last typed character and redo operations reverses the immediately done last undo operations. The program must accept the keystrokes and perform all the operations (undo and redo). Finally, the program must print the string after applying all the operations as the output.

Boundary Condition(s):

1 <= Length of string <= 1000

Input Format:

The first line contains the string S.

Output Format:

The first line contains the modified string.

Example Input/Output 1:

Input:

missel^z^z^z^ypell^z^z^yt

Output:

misspelt

Explanation:

The characters **missel** are followed by three undo operations which deletes last three characters.

So the string **missel** becomes **mis**.

The three undo operations are followed by one redo operation which reverses the last undo operation.

So the string **mis** becomes **miss**.

Then the characters pell are entered which are followed by two undo operations so the last two characters are removed.

So the string becomes **misspe**.

Then a redo operation is applied which reverses the last undo operation and so the string **misspe** becomes **misspel**.

The characters are followed by **t** so the final string is misspelt.

Answer: (penalty regime: 0 %)

```
def solve(s):
    text=[]
    redo=[]
    i=0
    while i < len(s):
        if s[i]=='^':
            if i+1<len(s) and s[i+1]=='z':
                if text:
                    redo.append(text.pop())
                    i+=2
```

```
            elif i+1 <len(s) and s[i+1]=='y':
                if redo:
                    text.append(redo.pop())
                    i+=2
        else:
            text.append(s[i])
            redo.clear()
            i+=1
    return ''.join(text)
s=input()
print(solve(s))
```

	Input	Expected	Got	
✔	missel^z^z^z^ypell^z^z^yt	misspelt	misspelt	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Thursday, 1 October 2026, 4:07 PM
State	Finished
Completed on	Monday, 5 October 2026, 8:51 PM
Time taken	4 days 4 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

You are given an integer tuple `nums` containing distinct numbers. Your task is to perform a sequence of operations on this tuple until it becomes empty. The operations are defined as follows:

1. If the first element of the tuple has the smallest value in the entire tuple, remove it.
2. Otherwise, move the first element to the end of the tuple.

You need to return an integer denoting the number of operations required to make the tuple empty.

Constraints

- The input tuple `nums` contains distinct integers.
- The operations must be performed using tuples and sets to maintain immutability and efficiency.
- Your function should accept the tuple `nums` as input and return the total number of operations as an integer.

Example:

Input: nums = (3, 4, -1)
Output: 5

Explanation:
Operation 1: [3, 4, -1] -> First element is not the smallest, move to the end -> [4, -1, 3]
Operation 2: [4, -1, 3] -> First element is not the smallest, move to the end -> [-1, 3, 4]
Operation 3: [-1, 3, 4] -> First element is the smallest, remove it -> [3, 4]
Operation 4: [3, 4] -> First element is the smallest, remove it -> [4]
Operation 5: [4] -> First element is the smallest, remove it -> []
Total operations: 5

For example:

Test	Result
`print(count_operations((3, 4, -1)))`	5

Answer: (penalty regime: 0 %)

Reset answer

```
def count_operations(nums):
    op=0
    rem=set(nums)

    while nums:
        smallest=min(rem)
        if nums[0]==smallest:
            removed=nums[0]
            nums=nums[1:]
            rem.remove(removed)
        else:
            nums=nums[1:]+(nums[0],)
        op+=1
    return op

```

	Test	Expected	Got	
✔	`print(count_operations((3, 4, -1)))`	5	5	✔

	Test	Expected	Got	
✔	`print(count_operations((1, 2, 3, 4, 5)))`	5	5	✔
✔	`print(count_operations((5, 4, 3, 2, 1)))`	15	15	✔
✔	`print(count_operations((42, )))`	1	1	✔
✔	`print(count_operations((-2, 3, -5, 4, 1)))`	11	11	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Write a program to eliminate the common elements in the given 2 arrays and print only the non-repeating elements and the total number of such non-repeating elements.

Input Format:

The first line contains space-separated values, denoting the size of the two arrays in integer format respectively.

The next two lines contain the space-separated integer arrays to be compared.

Sample Input:

5 4

1 2 8 6 5

2 6 8 10

Sample Output:

1 5 10

3

Sample Input:

5 5

1 2 3 4 5

1 2 3 4 5

Sample Output:

NO SUCH ELEMENTS

For example:

Input	Result
5 4 1 2 8 6 5 2 6 8 10	1 5 10 3
5 5 1 2 3 4 5 1 2 3 4 5	NO SUCH ELEMENTS

Answer: (penalty regime: 0 %)

```
n,m=map(int,input().split())
arr1=list(map(int,input().split()))
arr2=list(map(int,input().split()))

set1=set(arr1)
set2=set(arr2)

common=set1.intersection(set2)

res=[]
added=set()
for num in arr1+arr2:
    if num not in common and num not in added:
        res.append(num)
added.add(num)
if len(res)==0:
    print("NO SUCH ELEMENTS")
else:
    print(*res)
    print(len(res))
```

	Input	Expected	Got	
✔	5 4 1 2 8 6 5 2 6 8 10	1 5 10 3	1 5 10 3	✔
✔	3 3 10 10 10 10 11 12	11 12 2	11 12 2	✔
✔	5 5 1 2 3 4 5 1 2 3 4 5	NO SUCH ELEMENTS	NO SUCH ELEMENTS	✔

Passed all tests! ✔

Correct


Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Given an array of strings `words`, return *the words that can be typed using letters of the alphabet on only one row of American keyboard like the image below.*

In the **American keyboard**:

- the first row consists of the characters `"qwertyuiop"`,
- the second row consists of the characters `"asdfghjkl"`, and
- the third row consists of the characters `"zxcvbnm"`.

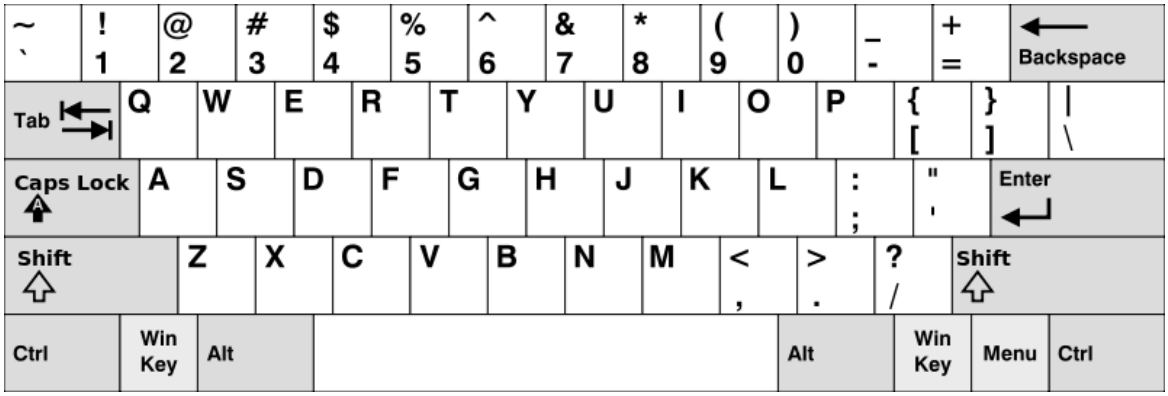

Example 1:

```
Input: words = ["Hello","Alaska","Dad","Peace"]
Output: ["Alaska","Dad"]
```

Example 2:

```
Input: words = ["omk"]
Output: []
```

Example 3:

```
Input: words = ["adsdf","sfd"]
Output: ["adsdf","sfd"]
```

For example:

Input	Result
4 Hello Alaska Dad Peace	Alaska Dad
2 adsfd afd	adsfd afd

Answer: (penalty regime: 0 %)

```
n=int(input())
rows=(set("qwertvuiop"),set("asdfghjkl"),set("zxcvbnm"))
f=False
for i in range(n):
    word=input().replace(",","").replace(" ","")
    w=set(word.lower())

    for row in rows:
        if w<=row:
            print(word)
```

```
            f=True
            break
if not f:
    print("No words")
```

	Input	Expected	Got	
✔	4 Hello Alaska Dad Peace	Alaska Dad	Alaska Dad	✔
✔	1 omk	No words	No words	✔
✔	2 adsfd afd	adsfd afd	adsfd afd	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Check if a set is a subset of another set.

Example:

Sample Input1:

mango apple

mango orange

mango

output1:

yes

set3 is subset of set1 and set2

```
input2:
```

```
mango orange
```

```
banana orange
```

```
grapes
```

```
output2:
```

no

For example:

Test	Input	Result
1	mango apple mango orange mango	yes set3 is subset of set1 and set2
2	mango orange banana orange grapes	No

Answer: (penalty regime: 0 %)

```
k=input()
s=input()
t=input()
if k<=s:
    print('yes')
    print("set3 is subset of set1 and set2")
else:
    print('No')
```

	Test	Input	Expected	Got	
✔	1	mango apple mango orange mango	yes set3 is subset of set1 and set2	yes set3 is subset of set1 and set2	✔
✔	2	mango orange banana orange grapes	No	No	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Given a tuple and a positive integer k, the task is to find the count of distinct pairs in the tuple whose sum is equal to **K**.

Examples:

> **Input:** t = (5, 6, 5, 7, 7, 8), K = 13
> **Output:** 2
> **Explanation:**
> Pairs with sum K(= 13) are {(5, 8), (6, 7), (6, 7)}.
> Therefore, distinct pairs with sum K(= 13) are { (5, 8), (6, 7) }.
> Therefore, the required output is 2.

For example:

Input	Result
1,2,1,2,5 3	1
1,2 0	0

Answer: (penalty regime: 0 %)

```
def count_distinct_pairs(t,k):
    pairs=set()

    for i in range(len(t)):
        for j in range(i+1,len(t)):
            if t[i]+t[j]==k:
                pair=tuple(sorted((t[i], t[j])))
                pairs.add(pair)
    return len(pairs)

t=tuple(map(int,input().split(",")))
k=int(input())
print(count_distinct_pairs(t,k))
```

	Input	Expected	Got	
✔	5,6,5,7,7,8 13	2	2	✔
✔	1,2,1,2,5 3	1	1	✔
✔	1,2 0	0	0	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Program to print all the distinct elements in an array. Distinct elements are nothing but the unique (non-duplicate) elements present in the given array.

Input Format:

First line take an Integer input from stdin which is array length n.

Second line take n Integers which is inputs of array.

Output Format:

Print the Distinct Elements in Array in single line which is space Separated

Example Input:

5

1 2 2 3 4

Output:

1 2 3 4

Example Input:

6

1 1 2 2 3 3

Output:

1 2 3

For example:

Input	Result
5 1 2 2 3 4	1 2 3 4

Answer: (penalty regime: 0 %)

```
n=int(input())
seen=set()

for i in range(n):
    seen.add(int(input()))
print(*seen)

```

	Input	Expected	Got	
✔	5 1 2 2 3 4	1 2 3 4	1 2 3 4	✔
✔	6 1 1 2 2 3 3	1 2 3	1 2 3	✔
✔	5 11 22 11 22 11	11 22	11 22	✔
✔	10 1 2 3 4 5 1 2 3 4 5	1 2 3 4 5	1 2 3 4 5	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

There is a malfunctioning keyboard where some letter keys do not work. All other keys on the keyboard work properly.

Given a string text of words separated by a single space (no leading or trailing spaces) and a string brokenLetters of all distinct letter keys that are broken, return the number of words in text you can fully type using this keyboard.

Example 1:

Input: text = "hello world", brokenLetters = "ad"

Output:

1

Explanation: We cannot type "world" because the 'd' key is broken.

For example:

Input	Result
hello world ad	1
Faculty Upskilling in Python Programming ak	2

Answer: (penalty regime: 0 %)

```
text=input().strip()
brokenletters=input().strip()

words=tuple(text.split())
broken=set(brokenletters.lower())
c=0
for word in words:
    if set(word.lower()).isdisjoint(broken):
        c+=1
print(c)
```

	Input	Expected	Got	
✔	hello world ad	1	1	✔
✔	Welcome to REC e	1	1	✔
✔	Faculty Upskilling in Python Programming ak	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

The **DNA sequence** is composed of a series of nucleotides abbreviated as `'A'`, `'C'`, `'G'`, and `'T'`.

- For example, `"ACGAATTCCG"` is a **DNA sequence**.

When studying **DNA**, it is useful to identify repeated sequences within the DNA.

Given a string `s` that represents a **DNA sequence**, return all the **`10`-letter-long** sequences (substrings) that occur more than once in a DNA molecule. You may return the answer in **any order**.

Example 1:

```
Input: s = "AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT"
Output: ["AAAAACCCCC","CCCCCAAAAA"]
```

Example 2:

```
Input: s = "AAAAAAAAAAAAA"
Output: ["AAAAAAAAAA"]
```

For example:

Input	Result
AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT	AAAAACCCCC CCCCCAAAAA

Answer: (penalty regime: 0 %)

```
def find_rep_seqs(s):
    seen=set()
    rep=set()

    for i in range(len(s)-9):
        seq=s[i:i+10]
        if seq in seen:
            rep.add(seq)
        else:
            seen.add(seq)
    return rep

dna=input().strip()
ans=find_rep_seqs(dna)

for seq in sorted(ans):
    print(seq)
```

	Input	Expected	Got	
✔	AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT	AAAAACCCCC CCCCCAAAAA	AAAAACCCCC CCCCCAAAAA	✔
✔	AAAAAAAAAAAAA	AAAAAAAAAA	AAAAAAAAAA	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Given an array of integers `nums` containing `n + 1` integers where each integer is in the range `[1, n]` inclusive.There is only **one repeated number** in `nums`, return *this repeated number*. Solve the problem using set.

Example 1:

```
Input: nums = [1,3,4,2,2]
```

```
Output: 2
```

Example 2:

```
Input: nums = [3,1,3,4,2]
```

```
Output: 3
```

For example:

Input	Result
1 3 4 4 2	4

Answer: (penalty regime: 0 %)

```
def find_dup(nums):
    seen=set()
    for number in nums:
        if number in seen:
            return number
        seen.add(number)
nums=tuple(map(int,input().split()))
print(find_dup(nums))
```

	Input	Expected	Got	
✔	1 3 4 4 2	4	4	✔
✔	1 2 2 3 4 5 6 7	2	2	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Coders here is a simple task for you, Given string str. Your task is to check whether it is a binary string or not by using python set.

Examples:

Input: str = "01010101010"

Output: Yes

Input: str = "REC101"

Output: No

For example:

Input	Result
01010101010	Yes
010101 10101	No

Answer: (penalty regime: 0 %)

```
s=input().strip()
if set(s)<={'0','1'}:
    print("Yes")
else:
    print("No")
```

	Input	Expected	Got	
✔	01010101010	Yes	Yes	✔
✔	REC123	No	No	✔
✔	010101 10101	No	No	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Thursday, 1 October 2026, 4:04 PM
State	Finished
Completed on	Monday, 5 October 2026, 7:24 PM
Time taken	4 days 3 hours

Question 1 | Complete Marked out of 1.00

Which of the following Python code will create a set?

(i) set1=set((0,9,0))
(ii) set1=set([0,2,9])
(iii) set1={}

a. ii
b. iii
c. i,ii
d. All of the above

Question 2 | Complete Marked out of 1.00

What is the output of the following set operation

```
sampleSet = {"Yellow", "Orange", "Black"}
sampleSet.update(["Blue", "Green", "Red"])
print(sampleSet)
```

a. {'Yellow', 'Orange', 'Black', ["Blue", "Green", "Red"]}
b. TypeError: update() doesn't allow list as a argument.
c. {'Yellow', 'Orange', 'Red', 'Black', 'Green', 'Blue'}
d. Name Error

Question 3 | Complete Marked out of 1.00

What will be the output of following Python code?

```
set1={0,0,9}


print(set1)
```

a. {0,0,9}

b. {9}

c. {0,9}

d. It will throw an error as there are two 0 while creating the set.

Question 4 | Complete Marked out of 1.00

Select all the correct options to remove “ECE” from the set.

```
sampleSet = {"ECE", "R&A", "MCT"}
```

a. sampleSet.delete("ECE")

b. sampleSet.discard("ECE")

c. remove.sampleSet("ECE")

d. del.sampleSet("ECE")

Question 5 | Complete Marked out of 1.00

What is the output of the given below program?

```
my_t1 = (1, 2, 3, 4)
my_t1.append( (5, 6, 7) )
print(len(my_t1))
```

a. 5

b. 2

c. 1

d. Error

Question 6 | Complete Marked out of 1.00

What is the output of the following

```
set1 = {10, 20, 30, 40, 50}
set2 = {60, 70, 10, 30, 40, 80, 20, 50}

print(set1.issubset(set2))
print(set2.issuperset(set1))
```

a. False
False

b. True
False

c. False
True

d. True
True

Question 7 | Complete Marked out of 1.00

What will the below Python code do?

```
set1={2,3}

set2={3,2}

set3={2,1}

if(set1==set2):

    print("yes")

else:

    print("no")

if(set1==set3):

    print("yes")

else:

    print("no")
```

a. "==" is not supported for set in Python

b. No, No

c. Yes, No

d. Yes, Yes

Question 8 | Complete Marked out of 1.00

What will be the output of the below Python code?

t1=(55,12,78,64,25)

t1.pop(12)

print(tuple1)

a. (12)

b. Error

c. (55,78,64,25)

d. 12

Question 9 | Complete Marked out of 1.00

If a=(15,16,17,18,19,25), then a[1:-1] will be

Note :

a=(15,16,17,18,19,25)

print((a[1:-1]))

- a. (16,17,18)
- b. (25,19,18,17)
- c. (16,17,18,19)
- d. Error

Question 10 | Complete Marked out of 1.00

Which of the following is a Python tuple?

- a. [1,2,3,4]
- b. ("Wonder")
- c. {1,3,8,9,41}
- d. (1,4,5,6,7)

Question 11 | Complete Marked out of 1.00

Choose the correct option.

- a. In Python, a tuple can contain both integers and strings as its elements.
- b. In Python, a tuple can contain either string or integer but not both at a time.
- c. In Python, a tuple can contain only integers as its elements.
- d. In Python, a tuple can contain only strings as its elements.

Question 12 | Complete Marked out of 1.00

Find the output of the given Python program?

```
t1 = (55, 44, 33, 22, 11)
x = [t1[i] for i in range(0, len(t1), 2)]
print(x)
```

- a. [(55,33,11)]
- b. (55,33,11)
- c. ([55,33,11])
- d. [55, 33, 11]

Question 13 | Complete Marked out of 1.00

Which of the following options will not result in an error when performed on tuples in Python where tupl=(5,2,7,0,3)?

a. tupl.sort()

b. tupl.append(2)

c. tupl[1]=2

d. tupl1=tupl+tupl

Question 14 | Complete Marked out of 1.00

Write the Output of the following Code?

```
t = (15,83,83,52,60,45,52,85,100)
print(min(t)+max(t)+t.count(52))
```

a. Error

b. 117

c. 2

d. 100

Question 15 | Complete Marked out of 1.00

What is the output of the given below program?

```
t = (58, 47, 36, 25, 14, 3)
x = t[2:-1]
print(x)
```

a. Error

b. (3,14,25)

c. (58,47,36,25)

d. (36, 25, 14)

Started on	Monday, 5 October 2026, 7:24 PM
State	Finished
Completed on	Monday, 5 October 2026, 7:27 PM
Time taken	3 mins 6 secs

Question 1 | Complete Marked out of 1.00

What will be the output of following Python code?

```
set1={2,5,3}

set2={3,1}

set3={}

set3=set1&set2

print(set3)
```

a. {2,5,3,1}
b. {}
c. {3}
d. {2,5,1}

Question 2 | Complete Marked out of 1.00

A python tuple can be created without using any parentheses. (True/False)

a. True
b. False

Question 3 | Complete Marked out of 1.00

What is the output of the following code?

```
aTuple = (10, 20, 30, 40, 50, 60, 70, 80)
print(aTuple[2:5], aTuple[:4], aTuple[3:])
```

a. (30, 40, 50) (10, 20, 30, 40)

b. (30, 40, 50)(40, 50, 60, 70, 80)

c. (10, 20, 30, 40) (40, 50, 60, 70, 80)

d. (30, 40, 50) (10, 20, 30, 40) (40, 50, 60, 70, 80)

Question 4 | Complete Marked out of 1.00

What is printed when the following code is run?

```
tup = ('30', '3', '2', '8')
print(sorted(tup,reverse = True))
```

a. ['2', '3', '8', '30']

b. ['2', '3', '30', '8']

c. ['8', '30', '3', '2']

d. ['30', '8', '3', '2']

Question 5 | Complete Marked out of 1.00

What is the output of the following code

```
aSet = {1, 'rec', ('cse', 'ece'), True}
print(aSet)
```

a. Error

b. {‘rec’, 1, (‘cse’, ‘ece’),True}

c. {‘rec’, 1, (‘cse’, ‘ece’)}

d. {‘rec’, True, (‘cse’, ‘ece’)}

Question 6 | Complete Marked out of 1.00

What will set1|set2 do?

```
If set1={"a","b",3}
set2={3,7}
```

a. A new set will be created with the elements of both set1 and set2

b. Elements of set2 will get appended to set1

c. A new set will be created with the unique elements of set1 and set2.

d. Elements of set1 will get appended to set2

Question 7 | Complete Marked out of 1.00

What will be the output of following Python code?

```
list1=[1,3,4,2]

x=list1.pop(2)

print(set([x]))
```

a. {1,3,4}

b. {2}

c. {1,3,2}

d. {4}

Question 8 | Complete Marked out of 1.00

What is the output of the following union operation

```
set1 = {10, 20, 30, 40}
set2 = {50, 20, "10", 60}

set3 = set1.union(set2)
print(set3)
```

a. SynatxError: Different types cannot be used with sets

b. {40, 10, 50, 20, 60, 30}

c. {40, '10', 50, 20, 60, 30}

d. {40, 10, '10', 50, 20, 60, 30}

Question 9 | Complete Marked out of 1.00

What will be the output of below Python code?

```
tupl=("python","programming","Computer")
print(tupl[-3:0])
```

a. (Computer)

b. Computer

c. ()

d. Error

Question 10 | Complete Marked out of 1.00

Find the output of the given Python program?

t = (11, 3)

x = 3 * t

print(x)

a. (11,3)(11,3)(11,3)

b. (11, 3, 11, 3, 11, 3)

c. [11,11,11,3,3,3]

d. (11,3,11,11,3,11,11,11,3)

Question 11 | Complete Marked out of 1.00

Find the output of the given Python program?

```
t1 = (1,2,3,(4,5))
t2 = (3,2,1,(4,5))
print(t1>t2)
```

a. Error
b. Error
c. False
d. True

Question 12 | Complete Marked out of 1.00

What will be printed when the following code executes?

```
a = ("Python Programming")
```

```
print type(a)
```

a. <class 'str'>
b. <class 'int'>
c. <class 'tuple'>
d. str

Question 13 | Complete Marked out of 1.00

What is the output of the following

```
set1 = {1, 2, 3, 4, 5}
set2 = {6, 7, 1, 3, 4, 8, 2, 5}

print(set1.issubset(set2))
print(set2.issuperset(set1))
```

a. True
True

b. False
False

c. True
False

d. False
True

Question 14 | Complete Marked out of 1.00

Which of the following options will produce the same output?

```
t = (15, 83, 21, 49, 60,45,52,85,100)
# options i, ii, iii, or iv
print(t[:-1])
print(t[0:5])
print(t[0:8])
print(t[-7:])
```

a. ii,iv

b. i,ii

c. iii,iv

d. i,iii

Question 15 | Complete Marked out of 1.00

What is the output of the given below program?

```
t1 = (1,2,3)
t2 = (4,5,6)
x = t1+t2
print(x)
```

a. (1,2,3,3,2,1)

b. (1,2,3)(4,5,6)

c. Error

d. (1,2,3,4,5,6)

Started on	Monday, 5 October 2026, 7:27 PM
State	Finished
Completed on	Monday, 5 October 2026, 7:31 PM
Time taken	4 mins 18 secs

Question 1 | Complete Marked out of 1.00

What will be the output of following Python code?

```
set1={0,0,9}


print(set1)
```

a. It will throw an error as there are two 0 while creating the set.

b. {9}

c. {0,0,9}

d. {0,9}

Question 2 | Complete Marked out of 1.00

Which of the following options will not result in an error when performed on tuples in Python where tupl=(5,2,7,0,3)?

a. tupl.append(2)

b. tupl.sort()

c. tupl1=tupl+tupl

d. tupl[1]=2

Question 3 | Complete Marked out of 1.00

What will be the output of following Python code?

```
list1=[1,3,4,2]

x=list1.pop(2)

print(set([x]))
```

a. {1,3,4}

b. {2}

c. {1,3,2}

d. {4}

Question 4 | Complete Marked out of 1.00

Which of the following is a Python tuple?

a. ("Wonder")

b. {1,3,8,9,41}

c. [1,2,3,4]

d. (1,4,5,6,7)

Question 5 | Complete Marked out of 1.00

What is the output of the following code

```
aSet = {1, 'rec', ('cse', 'ece'), True}
print(aSet)
```

a. {‘rec’, True, (‘cse’, ‘ece’)}

b. {‘rec’, 1, (‘cse’, ‘ece’),True}

c. Error

d. {‘rec’, 1, (‘cse’, ‘ece’)}

Question 6 | Complete Marked out of 1.00

Find the output of the given Python program?

```
t1 = (1,2,3,(4,5))
t2 = (3,2,1,(4,5))
print(t1>t2)
```

a. Error
b. False
c. True
d. Error

Question 7 | Complete Marked out of 1.00

Find the output of the given Python program?

t = (11, 3)

x = 3 * t

print(x)

a. (11,3)(11,3)(11,3)
b. (11,3,11,11,3,11,11,11,3)
c. (11, 3, 11, 3, 11, 3)
d. [11,11,11,3,3,3]

Question 8 | Complete Marked out of 1.00

What will be the output of the below Python code?

t1=(55,12,78,64,25)

t1.pop(12)

print(tuple1)

a. Error
b. 12
c. (12)
d. (55,78,64,25)

Question 9 | Complete Marked out of 1.00

Find the output of the given Python program?

```
>>>t = (1, 2, 4, 3, 8, 9)
>>>[t[i] for i in range(0, len(t), 2)]
```

a. [1, 2, 4, 3, 8, 9]
b. (1, 4, 8)
c. [1, 4, 8]
d. [2, 3, 9]

Question 10 | Complete Marked out of 1.00

What is printed when the following code is run?

```
tup = ('30', '3', '2', '8')
print(sorted(tup,reverse = True))
```

a. ['2', '3', '30', '8']
b. ['30', '8', '3', '2']
c. ['8', '30', '3', '2']
d. ['2', '3', '8', '30']

Question 11 | Complete Marked out of 1.00

What is the output of the following

```
set1 = {1, 2, 3, 4, 5}
set2 = {6, 7, 1, 3, 4, 8, 2, 5}

print(set1.issubset(set2))
print(set2.issuperset(set1))
```

a. False
True

b. True
True

c. False
False

d. True
False

Question 12 | Complete Marked out of 1.00

Select which is true for Python tuple?

a. We can change the tuple once created

b. A tuple is unordered

c. None of these

d. A tuple maintains the order of items

Question 13 | Complete Marked out of 1.00

Which of the following options will produce the same output?

```
t = (15, 83, 21, 49, 60,45,52,85,100)
# options i, ii, iii, or iv
print(t[:-1])
print(t[0:5])
print(t[0:8])
print(t[-7:])
```

a. iii,iv

b. ii,iv

c. i,iii

d. i,ii

Question 14 | Complete Marked out of 1.00

If a=(15,16,17,18,19,25), then a[1:-1] will be

Note :

a=(15,16,17,18,19,25)

print((a[1:-1]))

a. (16,17,18)

b. (16,17,18,19)

c. (25,19,18,17)

d. Error

Question 15 | Complete Marked out of 1.00

What is the output of the following set operation

```
sampleSet = {"Yellow", "Orange", "Black"}
sampleSet.update(["Blue", "Green", "Red"])
print(sampleSet)
```

a. {'Yellow', 'Orange', 'Black', ["Blue", "Green", "Red"]}

b. TypeError: update() doesn't allow list as a argument.

c. Name Error

d. {'Yellow', 'Orange', 'Red', 'Black', 'Green', 'Blue'}

Started on	Tuesday, 6 October 2026, 6:52 PM
State	Finished
Completed on	Friday, 9 October 2026, 10:35 PM
Time taken	3 days 3 hours
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

A sentence is a string of single-space separated words where each word consists only of lowercase letters.A word is uncommon if it appears exactly once in one of the sentences, and does not appear in the other sentence.

Given two sentences s1 and s2, return a list of all the uncommon words. You may return the answer in any order.

Example 1:

Input: s1 = "this apple is sweet", s2 = "this apple is sour"

Output: ["sweet","sour"]

Example 2:

Input: s1 = "apple apple", s2 = "banana"

Output: ["banana"]

Constraints:

1 <= s1.length, s2.length <= 200

s1 and s2 consist of lowercase English letters and spaces.

s1 and s2 do not have leading or trailing spaces.

All the words in s1 and s2 are separated by a single space.

Note:

Use dictionary to solve the problem

For example:

Input	Result
this apple is sweet this apple is sour	sweet sour

Answer: (penalty regime: 0 %)

```
s1=input()
s2=input()
d={}
for word in s1.split():
    d[word]=d.get(word,0)+1
for word in s2.split():
    d[word]=d.get(word,0)+1

for word in d:
    if d[word]==1:
        print(word,end=" ")
```

	Input	Expected	Got	
✔	this apple is sweet this apple is sour	sweet sour	sweet sour	✔

	Input	Expected	Got	
✔	apple apple banana	banana	banana	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Given an array of names of candidates in an election. A candidate name in the array represents a vote cast to the candidate. Print the name of candidates received Max vote. If there is tie, print a lexicographically smaller name.

Examples:

Input : votes[] = {"john", "johnny", "jackie",

"johnny", "john", "jackie",

"jamie", "jamie", "john",

"johnny", "jamie", "johnny",

"john"};

Output : John

We have four Candidates with name as 'John', 'Johnny', 'jamie', 'jackie'. The candidates John and Johny get maximum votes. Since John is alphabetically smaller, we print it. Use dictionary to solve the above problem

Sample Input:

10

John

John

Johny

Jamie

Jamie

Johny

Jack

Johny

Johny

Jackie

Sample Output:

Johny

Answer: (penalty regime: 0 %)

```
n=int(input())

vote_counts={}
for n in range(n):
    name=input().strip()
    vote_counts[name]=vote_counts.get(name, 0)+1
winner=""
```

```
max_votes=-1

for name,count in vote_counts.items():
    if count>max_votes:
        max_votes=count
        winner=name
    elif count==max_votes:
        if name<winner:
            winner=name
print(winner)
```

	Input	Expected	Got	
✔	10 John John Johny Jamie Jamie Johny Jack Johny Johny Jackie	Johny	Johny	✔
✔	6 Ida Ida Ida Kiruba Kiruba Kiruba	Ida	Ida	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Given a number, convert it into corresponding alphabet.

Input	Output
1	A
26	Z
27	AA
676	YZ

Input Format

Input is an integer

Output Format

Print the alphabets

Constraints

1 <= num <= 4294967295

Sample Input 1

26

Sample Output 1

Z

For example:

Test	Result
`print(excelNumber(26))`	Z

Answer: (penalty regime: 0 %)

Reset answer

```
def excelNumber(n):
    result=[]
    while n>0:

        n-=1
        rem=n%26

        result.append(chr(65+rem))
        n//=26

    return "".join(reversed(result))

```

	Test	Expected	Got	
✔	`print(excelNumber(26))`	Z	Z	✔
✔	`print(excelNumber(27))`	AA	AA	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Give a dictionary with value lists, sort the keys by summation of values in value list.

Input : test_dict = {'Gfg' : [6, 7, 4], 'best' : [7, 6, 5]}

Output : {'Gfg': 17, 'best': 18}

Explanation : Sorted by sum, and replaced.

Input : test_dict = {'Gfg' : [8,8], 'best' : [5,5]}

Output : {'best': 10, 'Gfg': 16}

Explanation : Sorted by sum, and replaced.

Sample Input:

2

Gfg 6 7 4

Best 7 6 5

Sample Output

Gfg 17

Best 18

For example:

Input	Result
2 Gfg 6 7 4 Best 7 6 5	Gfg 17 Best 18

Answer: (penalty regime: 0 %)

```
n=int(input())
data=[]

for n in range(n):
    parts=input().split()
    key=parts[0]

    total_sum=sum(map(int, parts[1:]))
    data.append((key, total_sum))

data.sort(key=lambda x: x[1])
for key, total_sum in data:
    print(F"{key} {total_sum}")
```

	Input	Expected	Got	
✔	2 Gfg 6 7 4 Best 7 6 5	Gfg 17 Best 18	Gfg 17 Best 18	✔
✔	2 Gfg 6 6 Best 5 5	Best 10 Gfg 12	Best 10 Gfg 12	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

You are given a string `word`. A letter is called **special** if it appears both in lowercase and uppercase in `word`.

Your task is to return the number of **special** letters in `word`.

Constraints

- The input string `word` will contain only alphabetic characters (both lowercase and uppercase).
- The solution must utilize a dictionary to determine the number of special letters.
- The function should handle various edge cases, such as strings without any special letters, strings with only lowercase or uppercase letters, and mixed strings.

Examples

Example 1:

Input: word = "aaAbcBC"
Output: 3

Explanation:
The special characters in `word` are 'a', 'b', and 'c'.

Example 2:

Input: word = "abc"
Output: 0

Explanation:
No character in `word` appears in uppercase.

For example:

Test	Result
`print(count_special_letters("AaBbCcDdEe"))`	5

Answer: (penalty regime: 0 %)

Reset answer

```
def count_special_letters(word: str) -> int:
    # Your implementation here
    pass
    char_dict={}
    for char in word:
        char_dict[char]=True
    special_count=0
    for char in char_dict:
        if char.islower() and char.upper() in char_dict:
            special_count+=1
    return special_count
```

	Test	Expected	Got	
✔	`print(count_special_letters("AaBbCcDdEe"))`	5	5	✔

	Test	Expected	Got	
✔	`print(count_special_letters("ABCDE"))`	`0`	`0`	✔
✔	`print(count_special_letters("abcde"))`	`0`	`0`	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

In the game of Scrabble™, each letter has points associated with it. The total score of a word is the sum of the scores of its letters. More common letters are worth fewer points while less common letters are worth more points. The points associated with each letter are shown below:

Points Letters

1 A, E, I, L, N, O, R, S, T and U

2 D and G

3 B, C, M and P

4 F, H, V, W and Y

5 K

8 J and X

10 Q and Z

Write a program that computes and displays the Scrabble™ score for a word. Create a dictionary that maps from letters to point values. Then use the dictionary to compute the score.

A Scrabble™ board includes some squares that multiply the value of a letter or the value of an entire word. We will ignore these squares in this exercise.

Sample Input

REC

Sample Output

REC is worth 5 points.

For example:

Input	Result
REC	REC is worth 5 points.

Answer: (penalty regime: 0 %)

```
groups={
    1: "AEILNORSTU", 2:"DG",3:"BCMP",
    4:"FHVWY",5:"K",8:"JX",10:"QZ"
}
letter_scores={}
for score,letters in groups.items():
    for letter in letters:
        letter_scores[letter]=score
word=input().strip()

total_score=0
for letter in word.upper():
    total_score+=letter_scores.get(letter, 0)

print(f"{word} is worth {total_score} points.")


```

	Input	Expected	Got	
✔	GOD	GOD is worth 5 points.	GOD is worth 5 points.	✔
✔	REC	REC is worth 5 points.	REC is worth 5 points.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Objective:

Develop a Python program that takes an input string from the user and counts the number of occurrences of each vowel (a, e, i, o, u) in the string. The program should be case-insensitive, meaning it should treat uppercase and lowercase vowels as the same.

Description:

Vowels play a significant role in the English language and other alphabet-based languages. Counting vowels in a given string is a fundamental task that can be applied in various text processing applications, including speech recognition, linguistic research, and text analysis. The objective of this problem is to create a Python script that accurately counts and displays the number of times each vowel appears in a user-provided string.

Program Requirements:

Input:

First line reading String as input, The string can contain any characters, including letters, numbers, and special characters.

Output:

Display the number of occurrences of each vowel in the string.

The output should list each vowel followed by its count.

Example:

Consider the following example for better understanding:

- **Input:** "Python Programming"
- **Output**

  a = 1
  e = 0
  i = 1
  o = 2
  u = 0

For example:

Input	Result
Hello World	a = 0 e = 1 i = 0 o = 2 u = 0
Python	a = 0 e = 0 i = 0 o = 1 u = 0

Answer: (penalty regime: 0 %)

```
text=input()
vowels = ['a', 'e', 'i', 'o', 'u']

for vowel in vowels:
    c=text.lower().count(vowel)
    print(f"{vowel} = {c}")
```

	Input	Expected	Got	
✔	Hello World	a = 0 e = 1 i = 0 o = 2 u = 0	a = 0 e = 1 i = 0 o = 2 u = 0	✔
✔	AEIOU aeio u	a = 2 e = 2 i = 2 o = 2 u = 2	a = 2 e = 2 i = 2 o = 2 u = 2	✔
✔	Python	a = 0 e = 0 i = 0 o = 1 u = 0	a = 0 e = 0 i = 0 o = 1 u = 0	✔
✔	abcdefghijklmnopqrstuvwxyz	a = 1 e = 1 i = 1 o = 1 u = 1	a = 1 e = 1 i = 1 o = 1 u = 1	✔
✔	12345!@#$%AEIOU	a = 1 e = 1 i = 1 o = 1 u = 1	a = 1 e = 1 i = 1 o = 1 u = 1	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Create a student dictionary for n students with the student name as key and their test mark assignment mark and lab mark as values. Do the following computations and display the result.

1.Identify the student with the highest average score

2.Identify the student who as the highest Assignment marks

3.Identify the student with the Lowest lab marks

4.Identify the student with the lowest average score

Note:

If more than one student has the same score display all the student names

Sample input:

4

James 67 89 56

Lalith 89 45 45

Ram 89 89 89

Sita 70 70 70

Sample Output:

Ram

James Ram

Lalith

Lalith

For example:

Input	Result
4 James 67 89 56 Lalith 89 45 45 Ram 89 89 89 Sita 70 70 70	Ram James Ram Lalith Lalith

Answer: (penalty regime: 0 %)

```
n=int(input())
students={}
for i in range(n):
    data =input().strip().split()
    name=data[0]
    scores=list(map(int, data[1:]))
    students[name]=scores
averages={
    name:sum(scores)/3 for name, scores in students.items()
}
assignments={
    name:scores[1] for name,scores in students.items()
}
labs={
    name:scores[2] for name, scores in students.items()
}
max_avg=max(averages.values())
```

```
highest_avg_students=[name for name, avg in averages.items() if avg==max_avg]

max_assign=max(assignments.values())
highest_assign_students=[name for name, mark in assignments.items() if mark==max_assign]
highest_assign_students.sort()
min_lab=min(labs.values())
lowest_lab_students=[name for name, mark in labs.items() if mark==min_lab]
lowest_lab_students.sort()

min_avg=min(averages.values())
lowest_avg_students=[name for name, avg in averages.items() if avg==min_avg]

print(" ".join(highest_avg_students))
print(" ".join(highest_assign_students))
print(" ".join(lowest_lab_students))
print(" ".join(lowest_avg_students))
```

	Input	Expected	Got	
✔	4 James 67 89 56 Lalith 89 45 45 Ram 89 89 89 Sita 70 70 70	Ram James Ram Lalith Lalith	Ram James Ram Lalith Lalith	✔
✔	3 Raja 95 67 90 Aarav 89 90 90 ShadhanA 95 95 91	ShadhanA ShadhanA Aarav Raja Raja	ShadhanA ShadhanA Aarav Raja Raja	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

A company wants to send its quotation secretly to its client. The company decided to encrypt the amount they are sending to their client with some special symbols so that the equation amount will not be revealed to any external person. They used the special symbols !,@,#,$,%,^,&,*,>,< for 0,1,2,3,4,5,6,7,8,9 respectively. Write a python code to help the company to convert the amount to special symbols.

(Value rounded off to 2 decimal points)

Input

n: Float data type which reads amount to send

Output

s: : String data type which displays symbols

Sample Testcase 1

Input

10000

Output

@!!!!.!!

Sample Testcase2

1234.56

Output

@#$%.^&

For example:

Input	Result
1345.23	@$%^.#$
15000.59	@^!!!.^<
156789	@^&*><.!!

Answer: (penalty regime: 0 %)

```
n=float(input())
x=f"{n:.2f}"
s={
    '0':'!',
    '1':'@',
    '2':'#',
    '3':'$',
    '4':'%',
    '5':'^',
    '6':'&',
    '7':'*',
    '8':'>',
    '9':'<',
    '.':'.'
}
m="".join(s[char] for char in x)
print(m)
```

	Input	Expected	Got	
✔	1345.23	@$%^.#$	@$%^.#$	✔

	Input	Expected	Got	
✔	15000.59	@^!!!.^<	@^!!!.^<	✔
✔	1234	@#$%.!!	@#$%.!!	✔
✔	156789	@^&*><.!!	@^&*><.!!	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

A sentence is a list of words that are separated by a single space with no leading or trailing spaces. Each word consists of lowercase and uppercase English letters.

A sentence can be shuffled by appending the 1-indexed word position to each word then rearranging the words in the sentence.

For example, the sentence "This is a sentence" can be shuffled as "sentence4 a3 is2 This1" or "is2 sentence4 This1 a3".

Given a shuffled sentence s containing no more than 9 words, reconstruct and return the original sentence.

Example 1:

Input:

is2 sentence4 This1 a3

Output:

This is a sentence

Explanation: Sort the words in s to their original positions "This1 is2 a3 sentence4", then remove the numbers.

Example 2:

Input:

Myself2 Me1 I4 and3

Output:

Me Myself and I

Explanation: Sort the words in s to their original positions "Me1 Myself2 and3 I4", then remove the numbers.

Constraints:

2 <= s.length <= 200

s consists of lowercase and uppercase English letters, spaces, and digits from 1 to 9.

The number of words in s is between 1 and 9.

The words in s are separated by a single space.

s contains no leading or trailing spaces.

Answer: (penalty regime: 0 %)

```
s=input()
words=s.split()
words.sort(key=lambda x:int(x[-1]))
print(" ".join(word[:-1] for word in words))
```

	Input	Expected	Got	
✔	is2 sentence4 This1 a3	This is a sentence	This is a sentence	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Tuesday, 6 October 2026, 6:03 PM
State	Finished
Completed on	Tuesday, 6 October 2026, 6:28 PM
Time taken	25 mins 1 sec

Question 1 | Complete Marked out of 1.00

What will be the Output of the following code?
dl={1:10, 2:20, 3:30, 4:40}
d2={5:50, 6:60, 7:70}
dl.update (d2)
print (dl)

- a. {1:10, 2: 20, 4: 40, 5: 50, 6: 60, 7: 70}
- b. {1: 10, 2: 20, 3: 30, 4: 40, 5: 50, 6: 60, 7: 70}
- c. [1: 10, 2: 20, 3: 30, 4: 40, 5: 50, 6: 60, 7: 70]
- d. [(1, 10), (2, 20), (3, 30), (4, 40), (5, 50)]

Question 2 | Complete Marked out of 1.00

pop( ) function delete and ____ the element of dictionary.

- a. not return
- b. return
- c. add
- d. display

Question 3 | Complete Marked out of 1.00

In Python, Dictionaries are immutable

Select one:

- True
- False

Question 4 | Not answered Marked out of 1.00

1,2,3 are the _____ in the following dictionary. D = {1 : "One", 2 : "Two", 3 : "Three"}

a. Items
b. None of the mentioned
c. Values
d. Keys

Question 5 | Not answered Marked out of 1.00

What will be the output of the following Python code snippet?

```
a={}
a['a']=1
a['b']=[2,3,4]
print(a)
```

a. {'b': [2, 3, 4], 'a': 1}
b. {'b': [2], 'a': 1}
c. {'b': [2], 'a': [3]}
d. Error

Question 6 | Not answered Marked out of 1.00

To obtain the number of entries in dictionary which command is used?

a. d.size()
b. size(d)
c. d.len()
d. len(d)

Question 7 | Not answered Marked out of 1.00

Both keys and values are unique in dictionary.

a. False
b. True

Question 8 | Not answered Marked out of 1.00

What will be the output of the following Python code snippet?

```
a={1:"A",2:"B",3:"C"}
print(a.get(5,4))
```

a. Invalid Synatx,Error
b. 4
c. A
d. 5

Question 9 | Not answered Marked out of 1.00

Following statement return values in the form of: D1.keys() # D1 is a dictionary

a. string
b. list
c. dictionary
d. tuple

Question 10 | Not answered Marked out of 1.00

There is no index value in dictionary like we have in List.(T/F)

a. True
b. False

Question 11 | Not answered Marked out of 1.00

Traversing a dictionary can be done using _____.

a. loop
b. if statement
c. jump statement
d. None of the mentioned

Question 12 | Not answered Marked out of 1.00

Keys of dictionary must be _____.

a. mutable
b. integers
c. unique
d. antique

Question 13 | Not answered Marked out of 1.00

Which one of the following is correct?

a. A dictionary can have two same keys or same values but cannot have two same key-value pair
b. A python, a dictionary can neither have two same keys nor two same values.
c. A dictionary can have two same values with different keys.
d. A dictionary can have two same keys with different values.

Question 14 | Not answered Marked out of 1.00

Which of the following are true of Python dictionaries:

a) All the keys in a dictionary must be of the same type.
b) Items are accessed by their position in a dictionary.
c) A dictionary can contain any object type except another dictionary.
d) Dictionaries can be nested to any depth.
e) Dictionaries are mutable.
f) Dictionaries are accessed by key.

a. c,d,e
b. d,e,f
c. b,c
d. a,b

Question 15 | Not answered Marked out of 1.00

Which one of the following is correct?

a. A python, a dictionary can neither have two same keys nor two same values.
b. A dictionary can have two same keys or same values but cannot have two same key-value pair
c. A dictionary can have two same keys with different values.
d. A dictionary can have two same values with different keys.

Started on	Tuesday, 6 October 2026, 6:36 PM
State	Finished
Completed on	Tuesday, 6 October 2026, 6:40 PM
Time taken	3 mins 30 secs

Question 1 | Complete Marked out of 1.00

Which of the following function create a dictionary from a sequence of key-value pairs

- a. dictionary( )
- b. convert( )
- c. create( )
- d. dict( )

Question 2 | Complete Marked out of 1.00

We can repeat the values of Key in Dictionary?

- a. False
- b. True

Question 3 | Complete Marked out of 1.00

Only values (without keys) can be printed in dictionary?

- a. True
- b. False

Question 4 | Complete Marked out of 1.00

Write a statement to retrieve the value corresponding to the key 7 in dictionary 'D1'.

- a. D1.pop(7)
- b. D1.get(7)
- c. D1.disp(7)
- d. D1.values(7)

Question 5 | Complete Marked out of 1.00

_____ function returns the value corresponding to the key passed as the argument.

a. values( )
b. update( )
c. del( )
d. get( )

Question 6 | Complete Marked out of 1.00

Dictionary is a _____ data type.

a. Sequence
b. None of the mentioned
c. Mapping
d. Ordered

Question 7 | Complete Marked out of 1.00

Which of the following are immutable data type? A. String B. Tuple C. List D. Dictionary

a. c and d
b. a and b
c. a and c
d. b and d

Question 8 | Complete Marked out of 1.00

Which function/statement delete the dictionary from the memory?

a. delete( )
b. del
c. pop( )
d. clear( )

Question 9 | Complete Marked out of 1.00

Which of the following is not method of dictionary?

a. del ( )
b. update( )
c. pop( )
d. len( )

Question 10 | Complete Marked out of 1.00

All elements in dictionary are separated by _____.

- a. Comma(,)
- b. Colon (:)
- c. dot(.)
- d. Semicolon(;)

Question 11 | Complete Marked out of 1.00

Write the output of the following codes.
>>>dl={1:10,2:20,3:30,4:40, 5:50}
>>>dl.items ()

- a. Error
- b. [(1, 10), (2, 20), (3, 30), (4, 40), (5, 50)]
- c. [10, 20, 30, 40, 50]
- d. [1, 2, 3, 4, 5]

Question 12 | Complete Marked out of 1.00

Which of the following is feature of Dictionary?

- a. Dictionary is mutable.
- b. All of the mentioned
- c. Keys must be of an immutable data type.
- d. Keys are unique within a dictionary.

Question 13 | Complete Marked out of 1.00

The key-value pair in dictionary is called _____.

- a. item
- b. paired value
- c. pair item
- d. value

Question 14 | Complete Marked out of 1.00

Which of the following is an example of dictionary?

- a. D = { }
- b. L = [ ]
- c. None of the mentioned
- d. C = ( )

Question 15 | Complete Marked out of 1.00

Dictionaries in python are _____.

- a. Mutable data type
- b. Mapping data type
- c. Non-Mutable data type
- d. Both Mutable data type and Mapping data type

Started on	Tuesday, 6 October 2026, 6:40 PM
State	Finished
Completed on	Tuesday, 6 October 2026, 6:47 PM
Time taken	7 mins 10 secs

Question 1 | Complete Marked out of 1.00

Which function/statement delete all the items of the dictionary?

- a. delete( )
- b. pop( )
- c. clear( )
- d. del

Question 2 | Complete Marked out of 1.00

Which of the following is used to delete an element from Dictionary?

- a. delete
- b. remove
- c. pop( )
- d. None of the mentioned

Question 3 | Complete Marked out of 1.00

Key – value concept is in _____.

- a. Dictionary
- b. Tuple
- c. List
- d. String

Question 4 | Complete Marked out of 1.00

_____ datatype fall under mapping.

- a. List
- b. Dictionary
- c. Tuple
- d. String

Question 5 | Complete Marked out of 1.00

A = {"A" : "Apple", "B" : "Ball", "C" : "Cat"} Which of the following statement will return : dict_items([('A', 'Apple'), ('B', 'Ball'), ('C', 'Cat')])

- a. print(A.keys( ))
- b. print(A.get( ))
- c. print(A.Items( ))
- d. print(A.values( ))

Question 6 | Complete Marked out of 1.00

clear() method is used to delete the dictionary.

- a. True
- b. False

Question 7 | Complete Marked out of 1.00

Suppose d = {“john”:40, “peter”:45}, to delete the entry for “john” what command do we use?

- a. del d[“john”]
- b. d.delete(“john”)
- c. d.delete(“john”:40)
- d. del d(“john”:40)

Question 8 | Complete Marked out of 1.00

Dictionaries are flexible in nature, means elements can be added or removed from it.

- a. True
- b. False

Question 9 | Complete Marked out of 1.00

In dictionary Keys and values are separated by _____.

a. Semicolon(;)
b. Colon (:)
c. dot(.)
d. Comma(,)

Question 10 | Complete Marked out of 1.00

Choose the correct statement, in reference to the following code: D1.update(D2) #D1 and D2 are dictionaries

a. None of the mentioned
b. It will merge all the elements of dictionary 'D2' in dictionary 'D1'.
c. It will create a new dictionary.
d. It will merge all the elements of dictionary 'D1' in dictionary 'D2'.

Question 11 | Complete Marked out of 1.00

Which statement is used to create an empty dictionary?

a. d1 = dict{ }
b. d1 = { }
c. d1 = ( )
d. d1 = [ ]

Question 12 | Complete Marked out of 1.00

What is the value of counter after the code is run?

```
phrase = "Cheese!!!! Cheese!!!! Python is a programming Language.Python!!"
counter = 0
letters = {}
for word in phrase.split():
    for letter in word:
        letter = letter.lower()
        if letter not in letters.keys():
            letters[letter] = 0
        letters[letter] += 1
for key in letters.keys():
    if letters[key] > 2:
        counter += 1
print(counter)
```

Answer: 9

Question 13 | Complete Marked out of 1.00

_____ function returns the number of key: value pairs of the dictionary.

- a. total( )
- b. length( )
- c. items( )
- d. len( )

Question 14 | Complete Marked out of 1.00

What does the following code print?

```
names = {'Janice': 5, 'Emily': 3, 'John': 7, 'Eleanor': 2}
list_o_names = []
names['Emily'] += 10
names['Erik'] = 22
for name in names:
    if names[name] > 5:
        list_o_names.append(name)
print(list_o_names)
```

- a. ['Emily', 'John', 'Erik']
- b. ['Janice', 'John', 'Erik']
- c. ['Janice', 'Emily', 'John', 'Eleanor']
- d. ['Janice', 'Emily', 'John']

Question 15 | Complete Marked out of 1.00

Which function helps to merge dictionary 'D1' and 'D2'?

a. merge( )
b. update( )
c. append( )
d. get( )

Started on	Saturday, 10 October 2026, 7:01 PM
State	Finished
Completed on	Saturday, 10 October 2026, 7:35 PM
Time taken	34 mins 33 secs
Marks	10.00/10.00
Grade	**100.00** out of 100.00

Question 1 | Correct Mark 1.00 out of 1.00

Develop a Python program to copy the contents of one file to another file.

Description:

1. **Input:**
   - Source file and destination file names.
2. **Output:**
   - The content of the source file copied to the destination file.

For example:

Test	Input	Result

`with open('output1.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	input1.txt
	output1.txt
		This is the source file.
		It contains multiple lines of text.
		Here is another line.

Answer: (penalty regime: 0 %)

```
inp=input()
out=input()
i=open(inp,'r')
o=open(out,'w')
s=i.read()
o.write(s)
o.close()

```

	Test	Input	Expected	Got	

✔	`with open('output1.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt
		output1.txt
			This is the source file.
			It contains multiple lines of text.
			Here is another line.
				This is the source file.
				It contains multiple lines of text.
				Here is another line.
					✔

✔	`with open('output2.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input2.txt
		output2.txt
			Hello, world!
			Python programming is amazing.
			Let's copy this text to another file.
				Hello, world!
				Python programming is amazing.
				Let's copy this text to another file.
					✔

✔	`with open('output3.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input3.txt
		output3.txt
			Single line.	Single line.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 2 | Correct Mark 1.00 out of 1.00

Develop a Python program to read a specific line from a text file based on a given line number.

Description:

1. **Input:**
   - A text file with multiple lines.
   - A line number to read.
2. **Output:**
   - The content of the specified line.

input1.txt:

Line one.
Line two.
Line three.
Line four.

For example:

Input	Result
input1.txt 3	Line three.

Answer: (penalty regime: 0 %)

```
file=input()
n=int(input())
with open(file,'r') as f:
    lune=f.readlines()
answer=lune[n-1]
print(answer)
```

	Input	Expected	Got	
✔	input1.txt 3	Line three.	Line three.	✔
✔	input2.txt 3	Line C.	Line C.	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 3 | Correct Mark 1.00 out of 1.00

Develop a Python program to read a text file and count the total number of words in the file.

Description:

1. **Input:**
   - A text file containing several lines of text.
   - File name you should get as input.
2. **Output:**
   - The total number of words in the file.

For example:

Input	Result
input2.txt	Total words: 14
input3.txt	Total words: 15

Answer: (penalty regime: 0 %)

```
file=input()
with open(file,'r') as f:
    line=f.read()
    word=line.split()
    print('Total words:',len(word))
```

	Input	Expected	Got	
✔	input1.txt	Total words: 6	Total words: 6	✔
✔	input2.txt	Total words: 14	Total words: 14	✔
✔	input3.txt	Total words: 15	Total words: 15	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 4 | Correct Mark 1.00 out of 1.00

Write a Python program to count the frequency of each word in a given text file.

Description:

1. **Input:**
   - String as input.
2. **Output:**
   - A list of words with their corresponding frequency count to be write in a file "output.txt"

Example:

- **Input File Content:**

  apple orange apple banana apple orange

Output:

apple: 3
orange: 2
banana: 1

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	`apple orange apple banana apple orange`	`apple: 3`
		`banana: 1`
		`orange: 2`

Answer: (penalty regime: 0 %)

```
import string
file=input().lower()
for p in string.punctuation:
    file=file.replace(p,'')
words=file.split()
result={}
for i in words:
    if i in result:
        result[i]+=1
    else:
        result[i]=1
with open('output.txt','w') as f:
    for word in sorted(result):
        f.write(word+': '+ str(result[word])+'\n')
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`apple orange apple banana apple orange`	`apple: 3`
			`banana: 1`
			`orange: 2`
				`apple: 3`
				`banana: 1`
				`orange: 2`
					✔

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`Hello world! Hello everyone. Welcome to the world of programming.`	`everyone: 1`
			`hello: 2`
			`of: 1`
			`programming: 1`
			`the: 1`
			`to: 1`
			`welcome: 1`
			`world: 2`
				`everyone: 1`
				`hello: 2`
				`of: 1`
				`programming: 1`
				`the: 1`
				`to: 1`
				`welcome: 1`
				`world: 2`
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`One fish two fish Red fish blue fish`	`blue: 1`
			`fish: 4`
			`one: 1`
			`red: 1`
			`two: 1`
				`blue: 1`
				`fish: 4`
				`one: 1`
				`red: 1`
				`two: 1`
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 5 | Correct Mark 1.00 out of 1.00

Write a Python program to append a new line at a specific position in a text file, shifting existing lines down.

Description:

1. **Input:**
   - A text file with multiple lines.
   - A line number to insert the new line at.
   - New content for the new line.
2. **Output:**
   - The updated file with the new line inserted at the specified position, shifting the existing lines down in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  3

  Inserted line..

Output:

Line one.
Line two.
Inserted line.
Line three.
Line four.

For example:

Test	Input	Result
with open('output.txt', 'r') as file: text = file.read() print(text)	input1.txt 3 Inserted line.	Line one. Line two. Inserted line. Line three. Line four.

Answer: (penalty regime: 0 %)

```
file=input()
n=int(input())
word=input()
with open(file,'r') as f:
    lines=f.readlines()
if lines and not lines[-1].endswith('\n'):
    lines[-1]+='\n'
lines.insert(n-1,word+'\n')
with open('output.txt','w') as fi:
    fi.writelines(lines)
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`input1.txt`
		`3`
		`Inserted line.`
			`Line one.`
			`Line two.`
			`Inserted line.`
			`Line three.`
			`Line four.`
				`Line one.`
				`Line two.`
				`Inserted line.`
				`Line three.`
				`Line four.`
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`input2.txt`
		`4`
		`Inserted line D.`
			`Line A.`
			`Line B.`
			`Line C.`
			`Inserted line D.`
				`Line A.`
				`Line B.`
				`Line C.`
				`Inserted line D.`
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 6 | Correct Mark 1.00 out of 1.00

Develop a Python program to identify and print all palindrome words from a given text file.

Description:

1. **Input:**
   - A text file containing multiple words.
2. **Output:**
   - A list of palindrome words found in the file name as 'output.txt'.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	input1.txt	madam
		arora
		malayalam

Answer: (penalty regime: 0 %)

```
file=input()
with open(file,'r') as f:
    line=f.read().split()
result=[]
for i in line:
    if(i==i[::-1]):
        result.append(i)
with open('output.txt','w') as f:
    for w in result:
        f.write(w+'\n')

```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt	madam
			arora
			malayalam
				madam
				arora
				malayalam
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 7 | Correct Mark 1.00 out of 1.00

Write a Python program to reverse the contents of a specific line in a text file based on a given line number.

Description:

1. **Input:**
   - A text file with multiple lines.
   - A line number to reverse.
2. **Output:**
   - The updated file with the specified line's contents reversed in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  3

Output:

Line one.
Line two.
eerht eniL.
Line four.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	input1.txt
	3
		Line one.
		Line two.
		eerht eniL.
		Line four.

Answer: (penalty regime: 0 %)

```
file=input()
n=int(input())
with open(file,'r') as f:
    lines=f.readlines()
aline=lines[n-1].strip()
lines[n-1]=aline[:-1][::-1]+'.'+'\n'
with open('output.txt','w') as f:
    f.writelines(lines)
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`input1.txt`
		`3`
			`Line one.`
			`Line two.`
			`eerht eniL.`
			`Line four.`
				`Line one.`
				`Line two.`
				`eerht eniL.`
				`Line four.`
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`input2.txt`
		`2`
			`Line A.`
			`B eniL.`
			`Line C.`
				`Line A.`
				`B eniL.`
				`Line C.`
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 8 | Correct Mark 1.00 out of 1.00

Create a Python program to delete a specific line from a text file based on a given line number.

Description:

1. **Input:**
   - A text file with multiple lines.
   - A line number to delete.
2. **Output:**
   - The updated file with the specified line removed in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  2

  Updated line two.

Output:

Line one.
Line three.
Line four.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	input1.txt
	2
		Line one.
		Line three.
		Line four.

Answer: (penalty regime: 0 %)

```
filename=input()
n=int(input())
with open(filename,'r') as f:
    lines=f.readlines()
lines.pop(n-1)
with open('output.txt','w') as f:
    f.writelines(lines)
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input1.txt
		2
			Line one.
			Line three.
			Line four.
				Line one.
				Line three.
				Line four.
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		input2.txt
		3
			Line A.
			Line B.
				Line A.
				Line B.
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 9 | Correct Mark 1.00 out of 1.00

Create a Python program to find the longest word in a text file.

- **Input:**
  - A text file containing multiple lines of text.
- **Output:**
  - The longest word in the file.

For example:

Input	Result
input1.txt	Longest word: containing

Answer: (penalty regime: 0 %)

```
file=input()
with open(file,'r') as f:
    lines=f.read().split()
result=max(lines,key=len)
print("Longest word: %s"%result)
```

	Input	Expected	Got	
✔	input1.txt	Longest word: containing	Longest word: containing	✔
✔	input2.txt	Longest word: thousand	Longest word: thousand	✔
✔	input3.txt	Longest word: supercalifragilisticexpialidocious	Longest word: supercalifragilisticexpialidocious	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Question 10 | Correct Mark 1.00 out of 1.00

Create a Python program to write to a specific line in a text file, replacing the existing content of that line.

Description:

1. **Input:**
   - A text file with multiple lines.
   - A line number to write to.
   - New content for the specified line.
2. **Output:**
   - The updated file with the specified line replaced by the new content in file "output.txt".

Example:

- **Input File Content:**

  "Line one.
  Line two.
  Line three.
  Line four."
  2

  Updated line two.

Output:

Line one.
Updated line two.
Line three.
Line four.

For example:

Test	Input	Result

`with open('output.txt', 'r') as file:`
`  text = file.read()`
`  print(text)`
	`input1.txt`
	`2`
	`Updated line two.`
		`Line one.`
		`Updated line two.`
		`Line three.`
		`Line four.`

Answer: (penalty regime: 0 %)

```
filename=input()
n=int(input())
sen=input()
with open(filename,'r') as f:
    lines=f.readlines()
lines[n - 1]=sen+'\n'
with open('output.txt','w') as f:
    f.writelines(lines)
```

	Test	Input	Expected	Got	

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`input1.txt`
		`2`
		`Updated line two.`
			`Line one.`
			`Updated line two.`
			`Line three.`
			`Line four.`
				`Line one.`
				`Updated line two.`
				`Line three.`
				`Line four.`
					✔

✔	`with open('output.txt', 'r') as file:`
	`  text = file.read()`
	`  print(text)`
		`input2.txt`
		`2`
		`Line B Updated.`
			`Line A.`
			`Line B Updated.`
			`Line C.`
				`Line A.`
				`Line B Updated.`
				`Line C.`
					✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

Started on	Saturday, 10 October 2026, 6:44 PM
State	Finished
Completed on	Saturday, 10 October 2026, 6:48 PM
Time taken	3 mins 27 secs

Question 1 | Complete Marked out of 1.00

To open a file c:\scores.txt for appending data, we use _____

- a. outfile = open("c:\\scores.txt", "a")
- b. outfile = open("c:\\scores.txt", "rw")
- c. outfile = open(file = "c:\\scores.txt", "w")
- d. outfile = open(file = "c:\scores.txt", "w")

Question 2 | Complete Marked out of 1.00

To open a file a.txt for reading, we use _____

- a. infile = open(file, "a.txt", "r")
- b. infile = open(file = "a.txt", "r")
- c. infile = open("a.txt", "r")
- d. infile = open(file = "a.txt", "r")

Question 3 | Complete Marked out of 1.00

What does the following code do?

```
f = open("data.txt", "a")
f.write("Adding new data\n")
f.close()
```

- a. Overwrites the file with "Adding new data"
- b. Opens the file in read mode
- c. Appends "Adding new data" to the end of the file
- d. Raises an error because the file is opened in append mode

Question 4 | Complete Marked out of 1.00

Which of the following is true about the readlines() method?

a. It reads the entire file and returns it as a string
b. It reads the file and returns it as a dictionary
c. It reads the entire file and returns it as a list of lines
d. It reads a single line from the file

Question 5 | Complete Marked out of 1.00

Which of the following methods is used to read a single line from a file?

a. readlines()
b. readline(size)
c. readline()
d. read()

Question 6 | Complete Marked out of 1.00

Which method can be used to read all lines of a file into a list?

a. readlines()
b. readline()
c. read()
d. readlist()

Question 7 | Complete Marked out of 1.00

What does the buffering parameter in the open() function control?

a. The access mode of the file
b. The buffer size for the file operations
c. The file's read/write position
d. The encoding of the file

Question 8 | Complete Marked out of 1.00

What will the read() method return if used on an empty file?

a. An empty string
b. EOFError
c. 0
d. None

Question 9 | Complete Marked out of 1.00

Which method is used to write a list of strings to a file?

- a. writelines()
- b. write_list()
- c. write()
- d. write_all()

Question 10 | Complete Marked out of 1.00

To open a file c:\scores.txt for writing, we use _____

- a. outfile = open(file = “c:\scores.txt”, “w”)
- b. outfile = open(“c:\\scores.txt”, “w”)
- c. outfile = open(“c:\scores.txt”, “w”)
- d. outfile = open(file = “c:\\scores.txt”, “w”)

Question 11 | Complete Marked out of 1.00

What does the flush() method do in file handling?

- a. Moves the file cursor to the beginning
- b. Flushes the internal buffer to the file
- c. Closes the file
- d. Deletes the file content

Question 12 | Complete Marked out of 1.00

Which method is used to close a file in Python?

- a. finish()
- b. end()
- c. terminate()
- d. close()

Question 13 | Complete Marked out of 1.00

Select the incorrect file access mode

- a. wb+
- b. ab+
- c. rw+
- d. r

Question 14 | Complete Marked out of 1.00

Which of the following modes opens a file for both reading and writing?

- a. r
- b. r+
- c. w
- d. a

Question 15 | Complete Marked out of 1.00

Which method is used to write data to a file?

- a. read()
- b. write()
- c. append()
- d. insert()

Started on	Saturday, 10 October 2026, 6:35 PM
State	Finished
Completed on	Saturday, 10 October 2026, 6:42 PM
Time taken	6 mins 58 secs

Question 1 | Complete Marked out of 1.00

What is the output of the following code?

```
f = open("test.txt", "w")
f.write("Hello, world!")
f.close()
f = open("test.txt", "r")
print(f.read())
f.close()
```

a. An error is raised

b. world

c. Hello

d. Hello, world!

Question 2 | Complete Marked out of 1.00

What does the following code do?

fo = open("foo.txt", "w")

a. Opens a file in binary mode

b. Creates a new file for writing

c. Opens an existing file in read mode

d. Appends to an existing file

Question 3 | Complete Marked out of 1.00

Which of the following modes opens a file for writing in binary format?

a. wb

b. r+

c. w

d. rb

Question 4 | Complete Marked out of 1.00

Default EOL character of text file in python is ,

- a. ,
- b. \t
- c. \n
- d. space

Question 5 | Complete Marked out of 1.00

What is the default mode in which the open() function opens a file?

- a. Binary
- b. Write
- c. Read
- d. Append

Question 6 | Complete Marked out of 1.00

Select the correct method to write a list of lines to a file

- a. write(list)
- b. None of the mentioned
- c. writelist(list)
- d. writelines(list)

Question 7 | Complete Marked out of 1.00

What does the mode attribute of a file object indicate?

- a. The name of the file
- b. The access mode in which the file was opened
- c. The size of the file
- d. The current position of the file cursor

Question 8 | Complete Marked out of 1.00

What is the purpose of the with statement in Python file handling?

- a. To delete a file
- b. To write data to a file
- c. To automatically close the file after its suite finishes
- d. To read data from a file

Question 9 | Complete Marked out of 1.00

What happens if you try to open a file in read mode ('r') that does not exist?

- a. A new file is created
- b. An empty file object is returned
- c. An error is raised
- d. The operation is ignored

Question 10 | Complete Marked out of 1.00

Which method is used to read file line by line

- a. readline()
- b. line()
- c. readlines(1)
- d. read(1)

Question 11 | Complete Marked out of 1.00

What does the seek() method do in file handling?

- a. Deletes the file
- b. Moves the file cursor to the specified position
- c. Reads the file line by line
- d. Writes data to the file

Question 12 | Complete Marked out of 1.00

What happens if you try to open a file in write mode ('w') and the file already exists?

- a. It raises an error
- b. It does nothing
- c. It clears the old data and starts fresh
- d. It appends data to the file

Question 13 | Complete Marked out of 1.00

Which method is used to sets the position of a file pointer

- a. tell()
- b. ftell()
- c. seek()
- d. fseek()

Question 14 | Complete Marked out of 1.00

If the file is opened in write mode and already exists, it truncates the existing content and places the filehandle at the beginning of the file.

Select one:

- True
- False

Question 15 | Complete Marked out of 1.00

The readlines() method returns _____

a. a list of integers

b. a list of lines

c. str

d. a list of single characters

Started on	Saturday, 10 October 2026, 6:48 PM
State	Finished
Completed on	Saturday, 10 October 2026, 6:57 PM
Time taken	9 mins 20 secs

Question 1 | Complete Marked out of 1.00

How do you check if a file is closed in Python?

- a. file.closed
- b. file.is_closed()
- c. file.isclosed()
- d. file.closed()

Question 2 | Complete Marked out of 1.00

What is the use of tell() method in python?

- a. tells you the file is opened or not
- b. tells you the end position within the file
- c. tells you the current position within the file
- d. none of the mentioned

Question 3 | Complete Marked out of 1.00

Select the correct output of the following code

```
fp.seek(5, 1)
```

- a. • Move file pointer five characters ahead from the current position.
- b. • Move file pointer five characters behind ahead from the end of a file.
- c. • Move file pointer five characters behind from the current position.
- d. Move file pointer five characters ahead from the beginning

Question 4 | Complete Marked out of 1.00

Which method is used to truncate a file to a specific size?

- a. truncate()
- b. reduce()
- c. resize()
- d. shrink()

Question 5 | Complete Marked out of 1.00

f.seek(5,1) means

- a. moves the file pointer to the end of a file
- b. move the file pointer five characters ahead from the current position
- c. move the file pointer to beginning of the file
- d. move the file pointer five characters behind from the current position

Question 6 | Complete Marked out of 1.00

What does the encoding parameter in the open() function specify?

- a. The buffer size
- b. The encoding format of the file
- c. The size of the file
- d. The mode of the file

Question 7 | Complete Marked out of 1.00

How can you read a file line by line efficiently in Python?

- a. Using a for loop
- b. Using the readline() method
- c. Using the read() method
- d. Using the readlines() method

Question 8 | Complete Marked out of 1.00

What is the difference between r+ and w+ modes in file handling?

a. r+ is for read and write, w+ is for append only
b. r+ is for read and append, w+ is for read and write
c. r+ is for read and write without truncating, w+ is for read and write with truncating
d. r+ is for binary read and write, w+ is for text read and write

Question 9 | Complete Marked out of 1.00

What will be the output of the following code if the file "example.txt" contains "Python Programming"?

```
 f = open("example.txt", "r")
print(f.read(6))
f.close()
```

a. Program
b. An error is raised
c. Python
d. Python Programming

Question 10 | Complete Marked out of 1.00

What is the result of the following code?

```
with open("example.txt", "r") as f:
    data = f.read()
print(data)
```

a. Prints the first 10 characters of the file
b. Prints an error message
c. Prints each line of the file
d. Prints the entire content of the file

Question 11 | Complete Marked out of 1.00

file_object.seek(offset [, reference_point])

What is the default, the value of reference_point?

a. 0
b. 2
c. 1
d. null
e. garbage

Question 12 | Complete Marked out of 1.00

Which function is used to open a file in Python?

- a. open()
- b. openfile()
- c. open_file()
- d. file()

Question 13 | Complete Marked out of 1.00

What is the use of seek() method in files?

- a. sets the file's current position at the offset
- b. none of the mentioned
- c. sets the file's previous position at the offset
- d. sets the file's current position within the file

Question 14 | Complete Marked out of 1.00

Which of the following is data file?

- a. Both text and binary file
- b. none of the given choices
- c. Text file
- d. Binary file

Question 15 | Complete Marked out of 1.00

Which method is used to read a specific number of characters from a file?

- a. readlines()
- b. readline()
- c. readchar()
- d. read(size)