

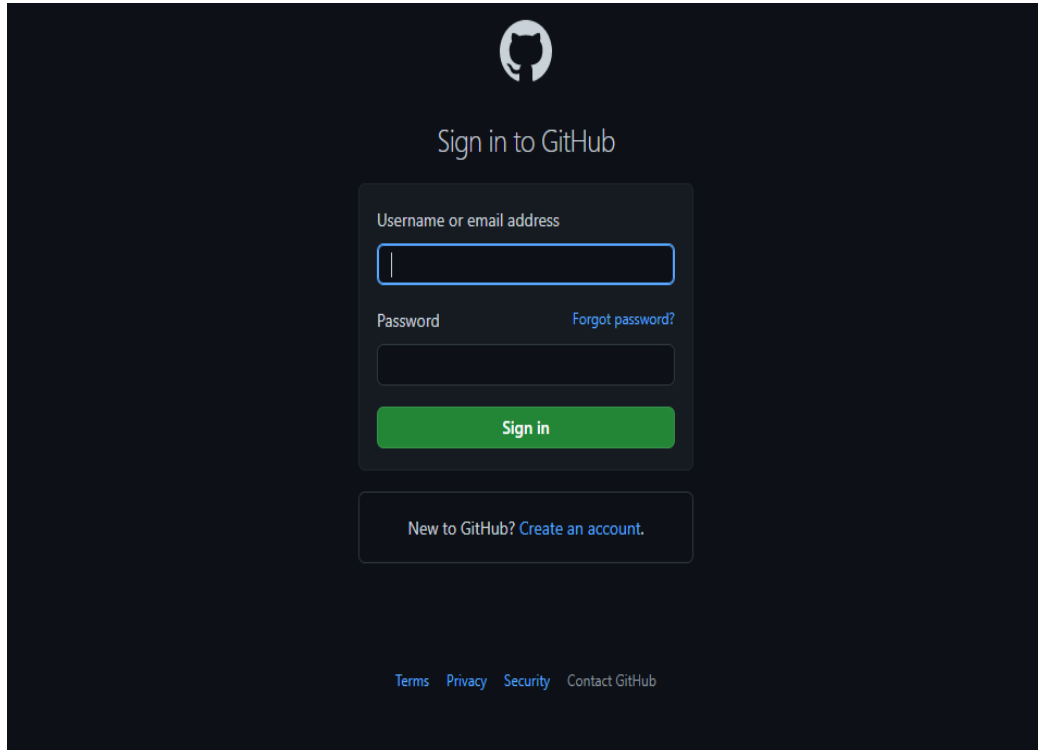


Please Follow below steps to trigger model training pipeline from Github Actions.


1. Login to Github with given credentials.

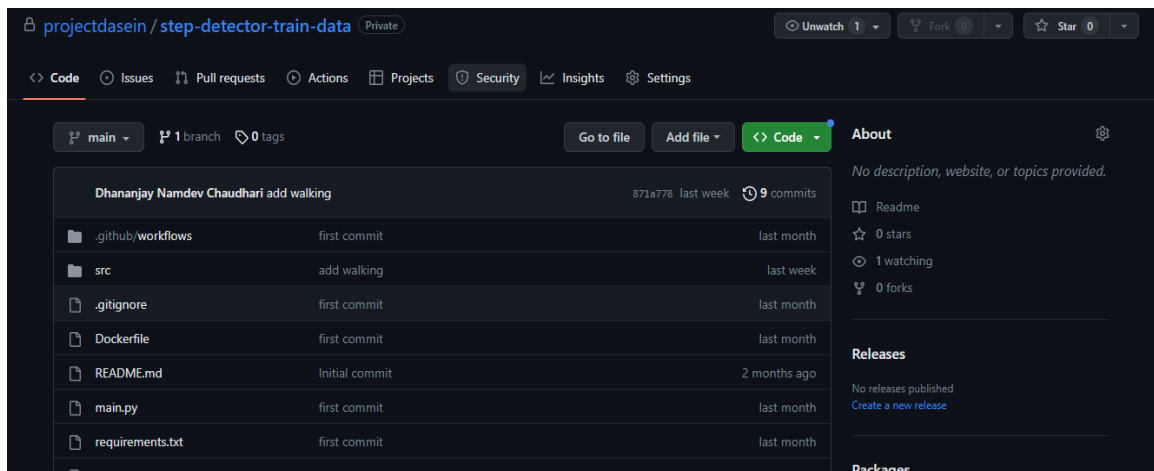


2. After successful login, You will see 2 repositories in the left rail with name "**projectdasein/step-detector-train-data**" and "**projectdasein/step-detector-upload-data**". Click on "**projectdasein/step-detector-train-data**"

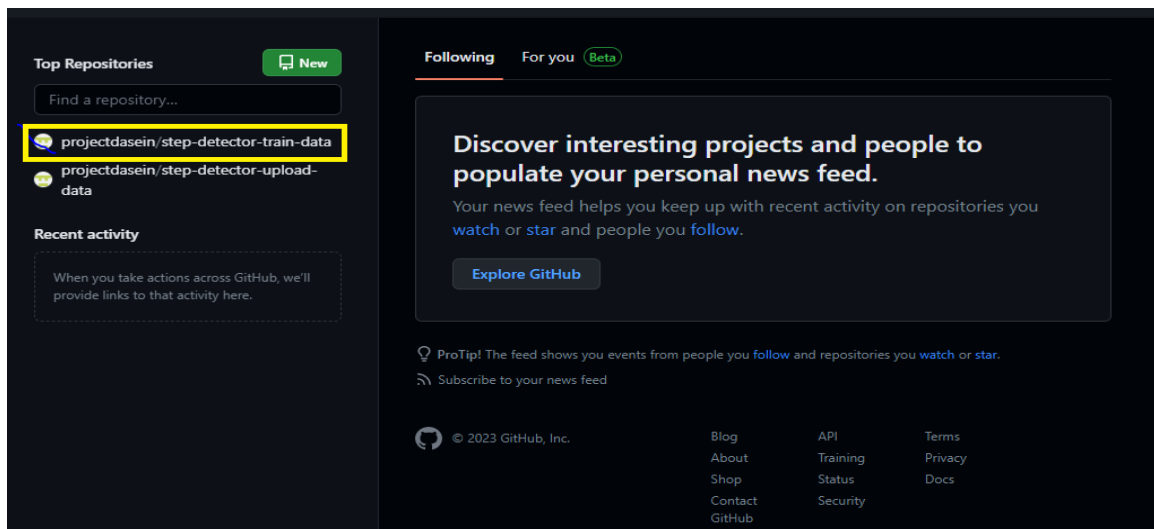


3. Click on “**Actions**” tab.

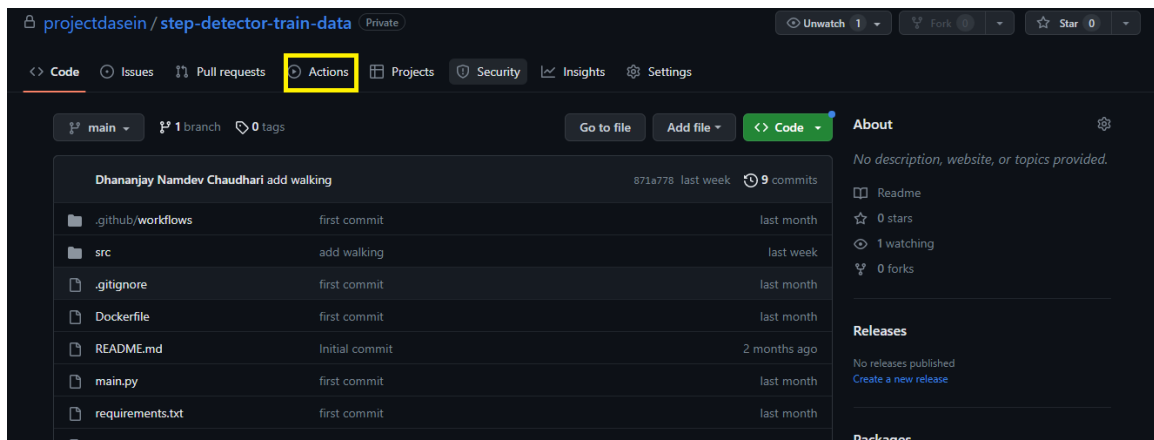

- It will open actions screen to trigger pipeline. Now click on “Manual Workflow” option from left rail

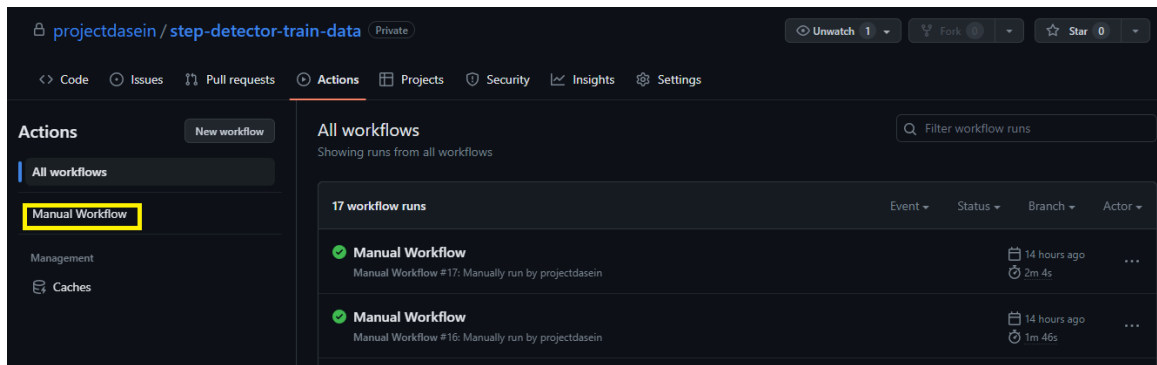

- In the right side of screen you will see “Run Workflow” option, select and click “Run Workflow” button.

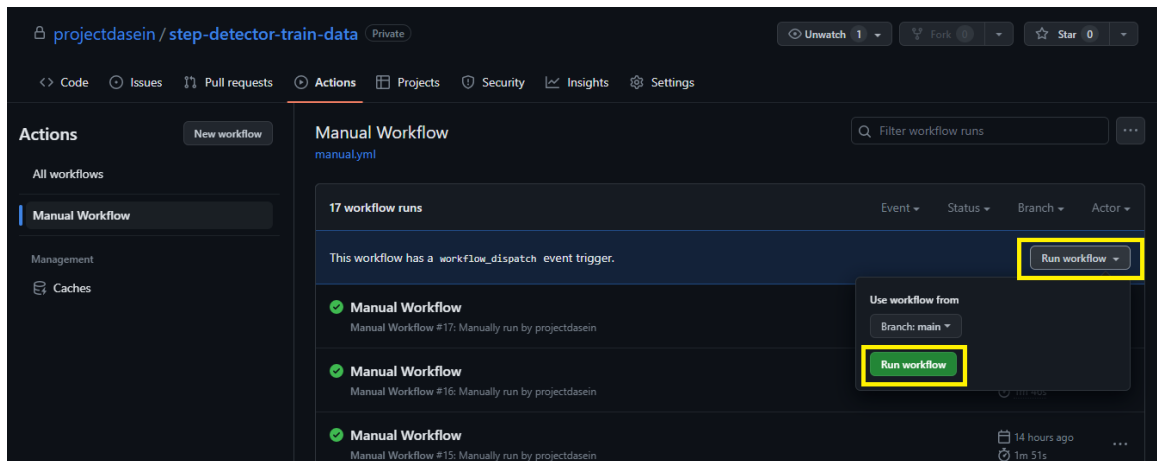


- Wait for few seconds, It will start workflow and you can see status of pipeline in workflow runs.

“Orange”: Pipeline is in running state

“Green”: Pipeline is Successful.

“Red”: Pipeline is Failed

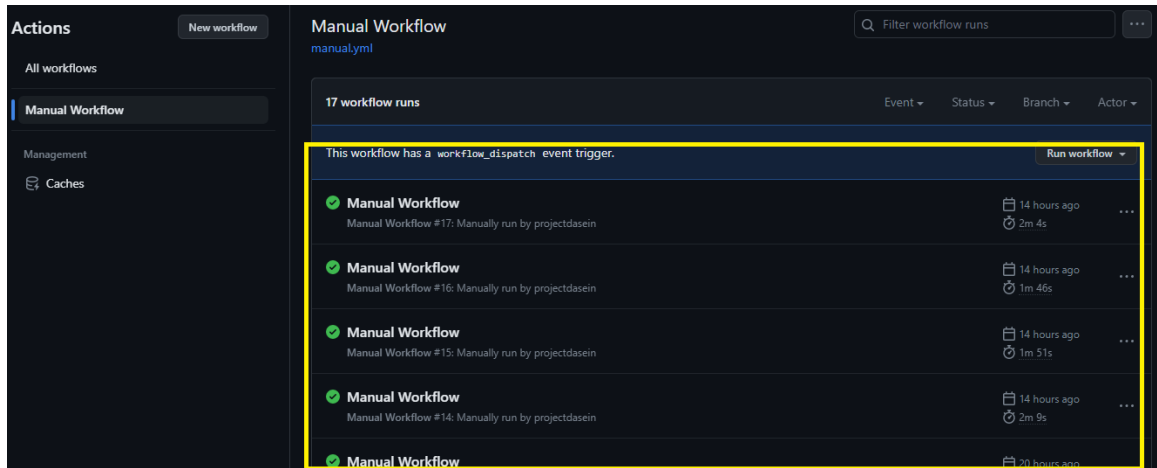

Next go to the Amazon S3 Bucket

[IAM ML User credential](#)

ID: MLuser


PWD: ProjectDaseinML5555

Account ID:112002133887

Then choose ds-step-detector in the Buckets tab

	Name ▲	AWS Region
☒	ds-step-detector	US West (Oregon) us-west-2
☐	ds-step-detector-prod	US West (Oregon) us-west-2
☐	elasticbeanstalk-us-west-2-112002133887	US West (Oregon) us-west-2
☐	lambdasam-6040b2478a-us-west-2	US West (Oregon) us-west-2
☐	pd-metric	US West (Oregon) us-west-2

Select “artifact”, then go to “Actions” and select “Make public using ACL”

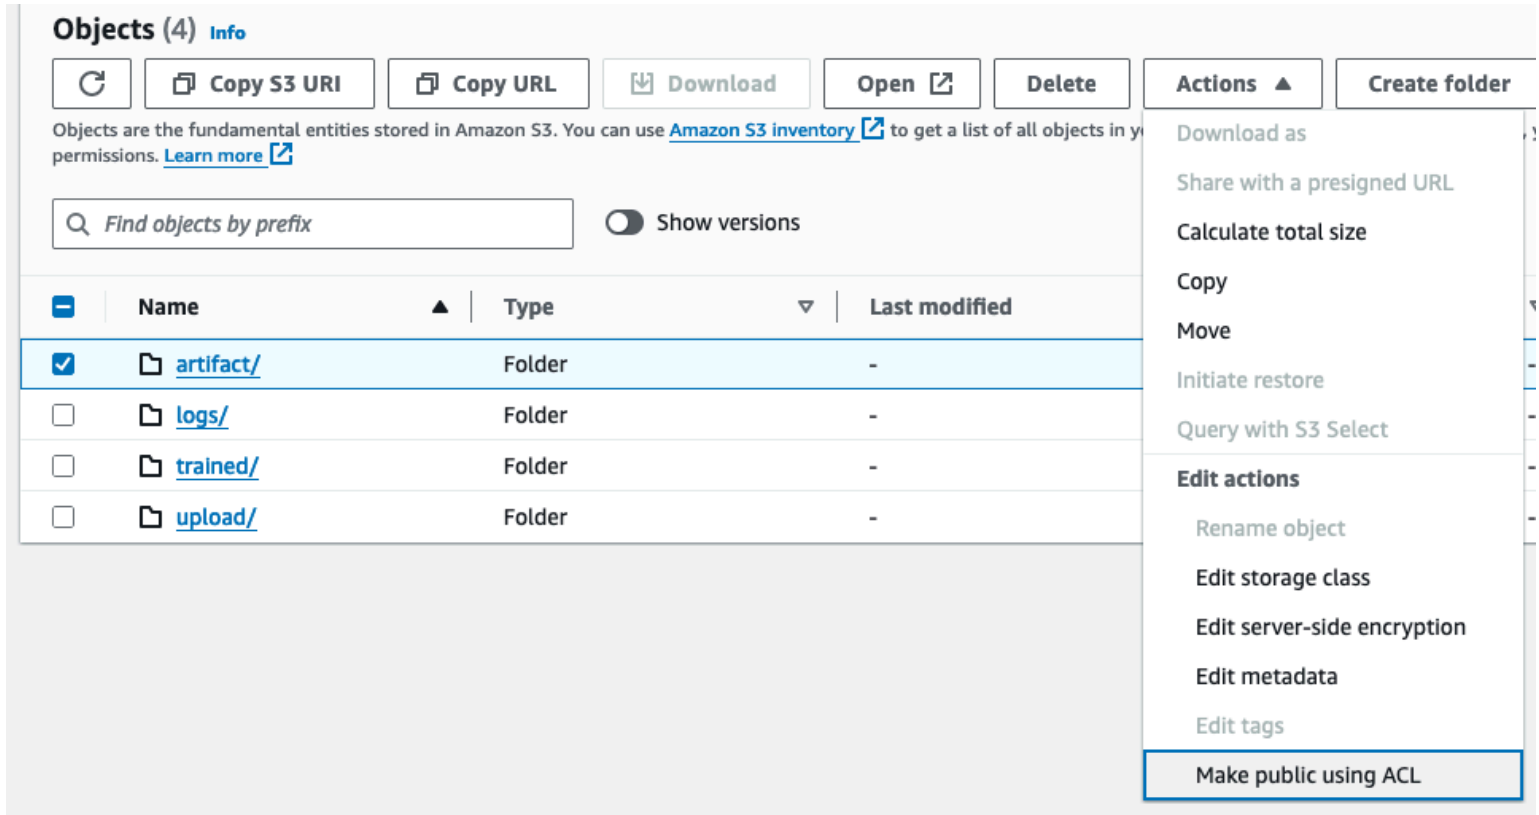

Objects (4) [Info](#)

[Refresh](#) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) **Actions** [Create folder](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For more information on object permissions, see [Permissions](#). [Learn more](#)

☐ Show versions

	Name	Type	Last modified
☒	artifact/	Folder	-
☐	logs/	Folder	-
☐	trained/	Folder	-
☐	upload/	Folder	-

Download as

Share with a presigned URL

Calculate total size

Copy

Move

Initiate restore

Query with S3 Select

Edit actions

Rename object

Edit storage class


Edit server-side encryption

Edit metadata

Edit tags

Make public using ACL

Then click “Make Public”

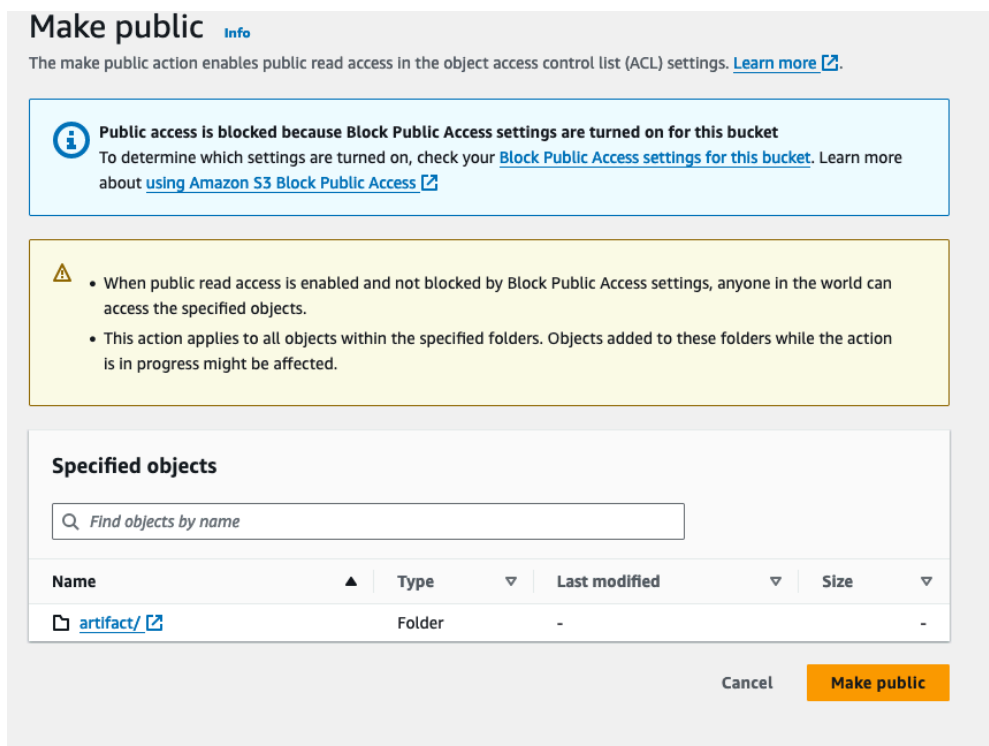

Make public [Info](#)

The make public action enables public read access in the object access control list (ACL) settings. [Learn more](#)

Public access is blocked because Block Public Access settings are turned on for this bucket

To determine which settings are turned on, check your [Block Public Access settings for this bucket](#). Learn more about [using Amazon S3 Block Public Access](#)

• When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.

• This action applies to all objects within the specified folders. Objects added to these folders while the action is in progress might be affected.

Specified objects

Name	Type	Last modified	Size
artifact/	Folder	-	-

[Cancel](#) [Make public](#)

It should show success when complete

Summary

Source
s3://ds-step-detector

Successfully edited public access
✔ 1242 objects, 2.1 GB

Double check by looking at the ML models in the PD viewer

PD Users

ML Model

Metrics

Firmware List

Modules / ML-Model

ML-Model

ML Model List

Total : 90

Version	ID	Created At	W Version
✔ Live v85.0	4592679a-5f80-432b-9e60-4aca7c8a535c	29/05/2024 : 2:35:26 PM	v85.0
✔ Live v84.0	20511d45-bdbc-453d-90df-d9ac0f8dc162	22/05/2024 : 1:28:11 AM	v84.0
✔ Live v78.0	df18dfef-165f-4936-bac3-aed77b366bc4	28/07/2023 : 4:44:33 AM	v78.0