2CSDE69 LAMP Technology

Innovative Assignment

Event Planning Website



Submitted to:

Prof. Diawat Vyas

Prepared By:

Priyanshu Valrani (20BCE310)

Siddharth Tanchak (20BCE290)

Vanshita Pradhan (20BCE229)

Introduction:

Event Planner website is a system that provides the user with various aminities such has karaoke, catering, banquet booking etc which are essential for an event such as birthday party, marriages etc,.

Modules:

1. USER

- a. User Registration
- b. User Login
- c. Mail Queries
- d. Book Services
- e. Booking History
- f. About
- g. User Profile
- h. Services

2. ADMIN

- a. Admin Login
- b. Add Services
- c. Manage Services
- d. Add event type
- e. Manage event type
- f. Approve Booking
- g. Cancelled Booking
- h. Dashboard
- i. Read Queries/unread Queries
- j. View Booking details
- k. View user queries

Technologies used:

- 1. Javascript
- 2. HTML
- 3. Bootstrap
- 4. CSS
- 5. PHP
- 6. MySql

USER MODULES

1. Index.html

```
session_start();
error_reporting(0);
include('includes/dbconnection.php');
 <!DOCTYPE html>
 <html lang="en">
 <title>Online Banquet Booking System|| Home Page
 <script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
 <!-- bootstrap-css -->
 link href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
 <!--// bootstrap-css -->
 k rel="stylesheet" href="css/style.css" type="text/css" media="all" />
 <!-- font-awesome icons -->
 <link href="css/font-awesome.css" rel="stylesheet">
 <!-- //font-awesome icons -->
 link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
 link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
 <script src="js/jquery-1.11.1.min.js"></script>
 <script src="js/bootstrap.js"></script>
 <script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
 <!--[if lt IE 9]>
```

```
<div class="banner jarallax">
    <div class="agileinfo-dot">
       <?php include_once('includes/header.php');?>
      <div class="w3layouts-banner">
         <div class="container">
           <div class="w3-banner-info">
             <div class="w31-banner-text">
                <h2>Event Planner</h2>
                We create your special day
       <div class="w3ls-banner-info-bottom">
         <div class="container">
           <div class="banner-address">
$sql="SELECT * from tblpage where PageType='contactus'";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if(\text{squery-}>rowCount() > 0)
foreach($results as $row)
             <div class="col-md-4 banner-address-left">
                <i class="fa fa-map-marker" aria-hidden="true"></i> <?php echo htmlentities($row-
>PageDescription);?>.
             <div class="col-md-4 banner-address-left">
                <i class="fa fa-envelope" aria-hidden="true"></i> <?php echo htmlentities($row-
>Email);?>
             <div class="col-md-4 banner-address-left">
                <i class="fa fa-phone" aria-hidden="true"></i> +<?php echo htmlentities($row-
>MobileNumber);?>
             <div class="clearfix"> </div>
           <?php $cnt=$cnt+1;}} ?></div>
  <!-- banner-bottom -->
```

```
<div class="banner-bottom">
    <div class="container">
       <div class="wthree-bottom-grids">
         <div class="col-md-6 wthree-bottom-grid">
            <div class="w3-agileits-bottom-left">
              <div class="w3-agileits-bottom-left-text">
                <h3>Planning from start to finish</h3>
                Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nam id lacus vel purus sagittis
convallis ut ac risus.
         <div class="col-md-6 wthree-bottom-grid">
            <div class="w3-agileits-bottom-left w3-agileits-bottom-right">
              <div class="w3-agileits-bottom-left-text">
                <h3>LET THE EXPERTS RUN YOUR WEDDING</h3>
                Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nam id lacus vel purus sagittis
convallis ut ac risus.
         <div class="clearfix"> </div>
  <!-- //banner-bottom -->
 <?php include_once('includes/footer.php');?>
  <script src="js/jarallax.js"></script>
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript">
    $('.jarallax').jarallax({
       speed: 0.5,
       imgWidth: 1366,
       imgHeight: 768
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript" src="js/move-top.js"></script>
  <script type="text/javascript" src="js/easing.js"></script>
  <script type="text/javascript">
    $(document).ready(function() {
```

```
var defaults = {
    containerID: 'toTop', // fading element id
    containerHoverID: 'toTopHover', // fading element hover id
    scrollSpeed: 1200,
    easingType: 'linear'
    };
    */

    $().UItoTop({ easingType: 'easeOutQuart' });

});
    </script>
<!-- //here ends scrolling icon -->
    <script src="js/modernizr.custom.js"></script>
</body>
</html>
```

2. Login.php

```
<?php
include('includes/dbconnection.php');
session_start();
error_reporting(0);
if(isset($_POST['login']))
  $email=$_POST['email'];
  $password=md5($_POST['password']);
  $sql ="SELECT ID FROM tbluser WHERE Email=:email and Password=:password";
  $query=$dbh->prepare($sql);
  $query->bindParam(':email',$email,PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
  $query-> execute();
  $results=$query->fetchAll(PDO::FETCH_OBJ);
  if($query->rowCount() > 0)
foreach ($results as $result) {
$_SESSION['obbsuid']=$result->ID;
$_SESSION['login']=$_POST['email'];
echo "<script type='text/javascript'> document.location ='index.php'; </script>";
} else{
echo "<script>alert('Invalid Details');</script>";
 <!DOCTYPE html>
 <html lang="en">
```

```
<title>Online Banquet Booking System | Login</title>
<script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<!-- bootstrap-css -->
<link href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
k rel="stylesheet" href="css/style.css" type="text/css" media="all" />
 clink href="css/font-awesome.css" rel="stylesheet">
<!-- //font-awesome icons -->
\langle link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
<script src="js/jquery-1.11.1.min.js"></script>
<script src="js/bootstrap.js"></script>
<script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
  <div class="banner jarallax">
    <div class="agileinfo-dot">
       <?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>Login</h2>
  <div class="contact">
    <div class="container">
```

```
<div class="agile-contact-form">
       <div class="col-md-6 contact-form-left">
         <div class="agileits-contact-address">
       <img src="images/5.jpg" alt="" height="500" width="500">
       <div class="col-md-6 contact-form-right">
         <div class="contact-form-top">
           <h3>Login to User Panel</h3>
         <div class="agileinfo-contact-form-grid">
           <form action="#" method="post" name="login">
              <input type="email" name="email" placeholder="E-mail" required="true">
              <input type="password" name="password" placeholder="Password" required="true">
              <div class="forgot">
                                 <a href="forgot-password.php">Forgot Password?</a>
              <button class="btn1" name="login">LOGIN NOW</button>
       <div class="col-md-6 contact-form-right">
         <div class="forgot">
                                 <a href="signup.php">Register Yourself</a>
       <div class="clearfix"> </div>
<?php include_once('includes/footer.php');?>
<script src="js/jarallax.js"></script>
<script src="js/SmoothScroll.min.js"></script>
<script type="text/javascript">
  $('.jarallax').jarallax({
    speed: 0.5,
```

3. Logut.php

```
<?php
session_start();
session_unset();
session_destroy();
header('location:login.php');
?>
```

4. Signup.php

```
$mobno=$_POST['mobno'];
  $email=$_POST['email'];
  $password=($_POST['password']);
  $ret="select Email from tbluser where Email=:email";
  $query= $dbh -> prepare($ret);
  $query-> bindParam(':email', $email, PDO::PARAM_STR);
  $query-> execute();
  $results = $query -> fetchAll(PDO::FETCH_OBJ);
if($query -> rowCount() == 0)
$sql="Insert Into tbluser(FullName,MobileNumber,Email,Password)Values(:fname,:mobno,:email,:password)";
$query = $dbh->prepare($sql);
$query->bindParam(':fname',$fname,PDO::PARAM_STR);
$query->bindParam(':email',$email,PDO::PARAM_STR);
$query->bindParam(':mobno',$mobno,PDO::PARAM_INT);
$query->bindParam(':password',$password,PDO::PARAM_STR);
$query->execute();
$lastInsertId = $dbh->lastInsertId();
if($lastInsertId)
echo "<script>alert('You have signup Scuccessfully');</script>";
echo "<script>alert('Something went wrong.Please try again');</script>";
echo "<script>alert('Email-id already exist. Please try again');</script>";
 <!DOCTYPE html>
 <html lang="en">
 <title>Online Banquet Booking System | Mail</title>
 <script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
 <!-- bootstrap-css -->
<link href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
```

```
<link rel="stylesheet" href="css/style.css" type="text/css" media="all" />
<!-- font-awesome icons -->
 k href="css/font-awesome.css" rel="stylesheet">
\langle \text{link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
k href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
<script src="js/jquery-1.11.1.min.js"></script>
<script src="js/bootstrap.js"></script>
<script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
  <script type="text/javascript">
function checkpass()
if(document.signup.password.value!=document.signup.confirmpassword.value)
alert('New Password and Confirm Password field does not match');
document.signup.confirmpassword.focus();
return false;
return true;
  <div class="banner jarallax">
    <div class="agileinfo-dot">
       <?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>Register</h2>
```

```
<div class="contact">
    <div class="container">
       <div class="agile-contact-form">
         <div class="col-md-6 contact-form-left">
           <div class="agileits-contact-address">
         <img src="images/5.jpg" alt="" height="500" width="500">
         <div class="col-md-6 contact-form-right">
           <div class="contact-form-top">
              <h3>Register Yourself </h3>
           <div class="agileinfo-contact-form-grid">
              <form method="post" name="signup" onsubmit="return checkpass();">
                            <input type="text" name="fname" placeholder="Full Name" required="true">
                            <input type="email" name="email" placeholder="E-mail" required="true">
                            <input type="text" name="mobno" placeholder="Mobile Number"</pre>
required="true" maxlength="10" pattern="[0-9]+">
                            <input type="password" name="password" placeholder="Password"</pre>
required="true" id="password1">
                            <input type="password" name="confirmpassword" placeholder="Confirm</pre>
Password" required="true" id="password2">
                            <div class="tp">
                              <button class="btn1" name="signup">Register NOW</button>
         <div class="col-md-6 contact-form-right">
            <div class="forgot">
                                   <a href="login.php">Already have an account!!!</a>
         <div class="clearfix"> </div>
```

```
<?php include_once('includes/footer.php');?>
 <script src="js/jarallax.js"></script>
 <script src="js/SmoothScroll.min.js"></script>
 <script type="text/javascript">
   /* init Jarallax */
   $('.jarallax').jarallax({
      speed: 0.5,
      imgWidth: 1366,
      imgHeight: 768
 <script src="js/SmoothScroll.min.js"></script>
 <script type="text/javascript" src="js/move-top.js"></script>
 <script type="text/javascript" src="js/easing.js"></script>
 <script type="text/javascript">
   $(document).ready(function() {
        containerID: 'toTop', // fading element id
      $().UItoTop({ easingType: 'easeOutQuart' });
<script src="js/modernizr.custom.js"></script>
```

5. about.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');</pre>
```

```
<!DOCTYPE html>
<html lang="en">
<title>Online Banquet Booking System|| About </title>
<script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<!-- bootstrap-css -->
k href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
 clink rel="stylesheet" href="css/style.css" type="text/css" media="all" />
<!-- font-awesome icons -->
<link href="css/font-awesome.css" rel="stylesheet">
<!-- //font-awesome icons -->
\langle \text{link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
clink href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
<script src="js/jquery-1.11.1.min.js"></script>
<script src="js/bootstrap.js"></script>
<script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
  <div class="banner jarallax">
    <div class="agileinfo-dot">
    <?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>About Us</h2>
```

```
<!-- about-top -->
  <div class="about-top">
    <div class="container">
       <div class="wthree-services-bottom-grids">
         <div class="col-md-6 wthree-services-left">
           <img src="images/5.jpg" alt="">
         <div class="col-md-6 wthree-services-right">
           <div class="wthree-services-right-top">
$sql="SELECT * from tblpage where PageType='aboutus'";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if(\text{query-}>rowCount()>0)
foreach($results as $row)
              <h4><?php echo htmlentities($row->PageTitle);?></h4>
              <?php echo $row->PageDescription;?><?php $cnt=$cnt+1;}} ?>
           <div class="clearfix"> </div>
         <div class="clearfix"> </div>
  <!-- //about-top -->
  <?php include_once('includes/footer.php');?>
  <script src="js/jarallax.js"></script>
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript">
    /* init Jarallax */
    $('.jarallax').jarallax({
       speed: 0.5,
       imgWidth: 1366,
       imgHeight: 768
```

6. book-services.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['obbsuid']==0)) {
    header('location:logout.php');
     } else{
        if(isset($_POST['submit']))
         $bid=$ GET['bookid'];
        $uid=$_SESSION['obbsuid'];
   $bookingfrom=$_POST['bookingfrom'];
   $bookingto=$_POST['bookingto'];
   $eventtype=$_POST['eventtype'];
  $nop=$_POST['nop'];
   $message=$_POST['message'];
  $bookingid=mt_rand(100000000, 999999999);
$sql="insert into
tblbooking (Booking ID, Service ID, User ID, Booking From, Booking To, Event Type, Number of guest, Message) values and the property of the 
 (:bookingid,:bid,:uid,:bookingfrom,:bookingto,:eventtype,:nop,:message)";
$query=$dbh->prepare($sql);
$query->bindParam(':bookingid',$bookingid,PDO::PARAM_STR);
```

```
$query->bindParam(':bid',$bid,PDO::PARAM_STR);
$query->bindParam(':uid',$uid,PDO::PARAM STR);
$query->bindParam(':bookingfrom',$bookingfrom,PDO::PARAM_STR);
$query->bindParam(':bookingto',$bookingto,PDO::PARAM_STR);
$query->bindParam(':eventtype',$eventtype,PDO::PARAM_STR);
$query->bindParam(':nop',$nop,PDO::PARAM_STR);
$query->bindParam(':message',$message,PDO::PARAM_STR);
$query->execute();
 $LastInsertId=$dbh->lastInsertId();
 if ($LastInsertId>0) {
  echo '<script>alert("Your Booking Request Has Been Send. We Will Contact You Soon")</script>';
echo "<script>window.location.href ='services.php'</script>";
     echo '<script>alert("Something Went Wrong. Please try again")</script>';
<!DOCTYPE html>
<html lang="en">
<title>Online Banquet Booking System | Book Services</title>
<script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
<!-- bootstrap-css -->
k href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
<!--// bootstrap-css -->
k rel="stylesheet" href="css/style.css" type="text/css" media="all" />
<!-- font-awesome icons -->
<link href="css/font-awesome.css" rel="stylesheet">
\lank href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
clink href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
<script src="js/jquery-1.11.1.min.js"></script>
<script src="js/bootstrap.js"></script>
<script type="text/javascript">
 jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
```

```
event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
  <div class="banner jarallax">
    <div class="agileinfo-dot">
       <?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>Book Services</h2>
  <div class="contact">
    <div class="container">
       <div class="agile-contact-form">
         <div class="col-md-6 contact-form-right">
            <div class="contact-form-top">
              <h3>Book Services </h3>
            <div class="agileinfo-contact-form-grid">
              <form method="post">
                 <div class="form-group row">
                     <label class="col-form-label col-md-4">Booking From:</label>
                     <div class="col-md-10">
                        <input type="date" class="form-control" style="font-size: 20px" required="true"</pre>
name="bookingfrom">
                            <div class="form-group row">
                     <label class="col-form-label col-md-4">Booking To:</label>
                     <div class="col-md-10">
                        <input type="date" class="form-control" style="font-size: 20px" required="true"</pre>
name="bookingto">
                   <div class="form-group row">
                     <label class="col-form-label col-md-4">Type of Event:</label>
                     <div class="col-md-10">
                       <select type="text" class="form-control" name="eventtype" required="true" >
                   <option value="">Choose Event Type</option>
```

```
<?php
$sql2 = "SELECT * from tbleventtype ";
query2 = dh -> prepare(sq12);
$query2->execute();
$result2=$query2->fetchAll(PDO::FETCH_OBJ);
foreach($result2 as $row)
 <option value="<?php echo htmlentities($row->EventType);?>"><?php echo htmlentities($row-</pre>
>EventType);?></option>
 <?php } ?>
                  <div class="form-group row">
                     <label class="col-form-label col-md-4">Number of Guest:</label>
                     <div class="col-md-10">
                       <input type="text" class="form-control" style="font-size: 20px" required="true"</pre>
name="nop">
                            <div class="form-group row">
                     <label class="col-form-label col-md-4">Message(if any)
                     <div class="col-md-10">
                       <textarea class="form-control" required="true" name="message" style="font-size:</pre>
                            <div class="tp">
                               <button type="submit" class="btn btn-primary"</pre>
name="submit">Book</button>
         <div class="clearfix"> </div>
```

```
<?php include_once('includes/footer.php');?>
 <script src="js/jarallax.js"></script>
 <script src="js/SmoothScroll.min.js"></script>
 <script type="text/javascript">
   $('.jarallax').jarallax({
      speed: 0.5,
      imgWidth: 1366,
      imgHeight: 768
 <script src="js/SmoothScroll.min.js"></script>
 <script type="text/javascript" src="js/move-top.js"></script>
 <script type="text/javascript" src="js/easing.js"></script>
 <script type="text/javascript">
   $(document).ready(function() {
        var defaults = {
      $().UItoTop({ easingType: 'easeOutQuart' });
<script src="js/modernizr.custom.js"></script>
</html><?php } ?>
```

7. booking-history.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['obbsuid']==0)) {
   header('location:logout.php');
} else{</pre>
```

```
<!DOCTYPE html>
 <html lang="en">
 <title>Online Banquet Booking System|| Booking History </title>
 <script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
 <!-- bootstrap-css -->
 k href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
 <!--// bootstrap-css -->
 k rel="stylesheet" href="css/style.css" type="text/css" media="all" />
 <!-- font-awesome icons -->
 k href="css/font-awesome.css" rel="stylesheet">
 <!-- //font-awesome icons -->
 \langle link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
 clink href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300
rel='stylesheet' type='text/css'>
 <script src="js/jquery-1.11.1.min.js"></script>
 <script src="js/bootstrap.js"></script>
 <script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
 <!--[if lt IE 9]>
  <div class="banner jarallax">
    <div class="agileinfo-dot">
    <?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>Booking Histor</h2>
```

```
<!-- about-top -->
 <div class="about-top">
  <div class="container">
    <div class="wthree-services-bottom-grids">
     List of booking.
       <div class="bs-docs-example wow fadeInUp animated" data-wow-delay=".5s">
        Booking ID
              Cutomer Name
              Mobile Number
              Email
              Booking Date
              Status
              Action
$uid=$_SESSION['obbsuid'];
$sql="SELECT
tbluser.FullName,tbluser.MobileNumber,tbluser.Email,tblbooking.BookingID,tblbooking.BookingDate,tblbooki
ng.Status,tblbooking.ID from tblbooking join tbluser on tbluser.ID=tblbooking.UserID where
tblbooking.UserID='$uid'";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if(\text{query-}>rowCount() > 0)
foreach($results as $row)
              <?php echo htmlentities($cnt);?>
              <?php echo htmlentities($row->BookingID);?>
              <?php echo htmlentities($row->FullName);?>
              <?php echo htmlentities($row->MobileNumber);?>
              <?php echo htmlentities($row->Email);?>
              <span class="badge badge-primary"><?php echo htmlentities($row-</pre>
>BookingDate);?></span>
```

```
<?php if($row->Status==""){ ?>
           <?php echo "Not Updated Yet"; ?>
<?php } else { ?>
                     <span class="badge badge-primary"><?php echo htmlentities($row-</pre>
>Status);?></span>
<?php } ?>
                      <a href="view-booking-detail.php?editid=<?php"><php
echo htmlentities ($row->ID);?>&&bookingid=<?php echo htmlentities ($row->BookingID);?>"><i class="fa
fa-eye" aria-hidden="true"></i></a>
                   <?php $cnt=$cnt+1;}} ?>
        <div class="clearfix"> </div>
  <!-- //about-top -->
  <?php include_once('includes/footer.php');?>
  <script src="js/jarallax.js"></script>
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript">
    /* init Jarallax */
    $('.jarallax').jarallax({
      speed: 0.5,
      imgWidth: 1366,
      imgHeight: 768
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript" src="js/move-top.js"></script>
  <script type="text/javascript" src="js/easing.js"></script>
  <script type="text/javascript">
   $(document).ready(function() {
```

```
/*
    var defaults = {
    containerID: 'toTop', // fading element id
    containerHoverID: 'toTopHover', // fading element hover id
    scrollSpeed: 1200,
    easingType: 'linear'
    };
    */

    $().UItoTop({ easingType: 'easeOutQuart' });

});
    </script>
<!-- //here ends scrolling icon -->
<script src="js/modernizr.custom.js"></script>
</body>
</html><?php } ?>
```

8. change-password.php

```
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['obbsuid']==0)) {
 header('location:logout.php');
 } else{
  if(isset($_POST['submit']))
$uid=$_SESSION['obbsuid'];
$cpassword=md5($_POST['currentpassword']);
$newpassword=md5($_POST['newpassword']);
$sql ="SELECT ID FROM tbluser WHERE ID=:uid and Password=:cpassword";
$query= $dbh -> prepare($sql);
$query-> bindParam(':uid', $uid, PDO::PARAM_STR);
$query-> bindParam(':cpassword', $cpassword, PDO::PARAM_STR);
$query-> execute();
$results = $query -> fetchAll(PDO::FETCH_OBJ);
if(\text{query -> rowCount}() > 0)
$con="update tbluser set Password=:newpassword where ID=:uid";
$chngpwd1 = $dbh->prepare($con);
$chngpwd1-> bindParam(':uid', $uid, PDO::PARAM_STR);
$chngpwd1-> bindParam(':newpassword', $newpassword, PDO::PARAM_STR);
$chngpwd1->execute();
echo '<script>alert("Your password successully changed")</script>';
```

```
} else {
echo '<script>alert("Your current password is wrong")</script>';
 <!DOCTYPE html>
 <html lang="en">
 <title>Online Banquet Booking System | Change Password</title>
 <script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
 <!-- bootstrap-css -->
 k href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
 clink rel="stylesheet" href="css/style.css" type="text/css" media="all" />
 <link href="css/font-awesome.css" rel="stylesheet">
 <!-- //font-awesome icons -->
 \langle link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
 slink href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
 <script src="js/jquery-1.11.1.min.js"></script>
 <script src="js/bootstrap.js"></script>
 <script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
 <script type="text/javascript">
function checkpass()
if(document.changepassword.newpassword.value!=document.changepassword.confirmpassword.value)
alert('New Password and Confirm Password field does not match');
document.changepassword.confirmpassword.focus();
```

```
return true;
  <div class="banner jarallax">
    <div class="agileinfo-dot">
       <?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>Change Password</h2>
  <div class="contact">
    <div class="container">
       <div class="agile-contact-form">
         <div class="col-md-6 contact-form-right">
            <div class="contact-form-top">
              <h3>User Profile </h3>
            <div class="agileinfo-contact-form-grid">
              <form method="post" onsubmit="return checkpass();" name="changepassword">
                 <div class="form-group row">
                     <label class="col-form-label col-md-4">Current Password</label>
                     <div class="col-md-10">
                        <input type="password" class="form-control" style="font-size: 20px" required="true"</pre>
name="currentpassword">
                            <div class="form-group row">
                     <label class="col-form-label col-md-4">New Password</label>
                     <div class="col-md-10">
                       <input type="password" class="form-control" required="true" name="newpassword"</pre>
style="font-size: 20px">
                             <div class="form-group row">
                     <label class="col-form-label col-md-4">Confirm Password/label>
                     <div class="col-md-10">
                        <input type="password" class="form-control" required="true"</pre>
name="confirmpassword" style="font-size: 20px" >
```

```
<div class="tp">
                                 <button type="submit" class="btn btn-primary"</pre>
name="submit">Change</button>
          <div class="clearfix"> </div>
  <?php include_once('includes/footer.php');?>
  <script src="js/jarallax.js"></script>
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript">
    /* init Jarallax */
    $('.jarallax').jarallax({
       speed: 0.5,
       imgWidth: 1366,
       imgHeight: 768
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript" src="js/move-top.js"></script>
  <script type="text/javascript" src="js/easing.js"></script>
  <!-- here stars scrolling icon -->
  <script type="text/javascript">
     $(document).ready(function() {
         var defaults = {
```

```
$().UItoTop({ easingType: 'easeOutQuart' });

});
</script>
<!-- //here ends scrolling icon -->
<script src="js/modernizr.custom.js"></script>

</body>
</html><?php } ?>
```

9. forgot-password.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if(isset($_POST['submit']))
  $email=$_POST['email'];
$mobile=$_POST['mobile'];
$newpassword=md5($ POST['newpassword']);
 $sql ="SELECT Email FROM tbluser WHERE Email=:email and MobileNumber=:mobile";
$query= $dbh -> prepare($sql);
$query-> bindParam(':email', $email, PDO::PARAM_STR);
$query-> bindParam(':mobile', $mobile, PDO::PARAM_STR);
$query-> execute();
$results = $query -> fetchAll(PDO::FETCH_OBJ);
if(\text{squery -> rowCount}() > 0)
$con="update tbluser set Password=:newpassword where Email=:email and MobileNumber=:mobile";
$chngpwd1 = $dbh->prepare($con);
$chngpwd1-> bindParam(':email', $email, PDO::PARAM_STR);
$chngpwd1-> bindParam(':mobile', $mobile, PDO::PARAM_STR);
$chngpwd1-> bindParam(':newpassword', $newpassword, PDO::PARAM_STR);
$chngpwd1->execute();
echo "<script>alert('Your Password succesfully changed');</script>";
else {
echo "<script>alert('Email id or Mobile no is invalid');</script>";
 <!DOCTYPE html>
 <html lang="en">
<title>Online Banquet Booking System | Forgot Password</title>
```

```
<script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
 <!-- bootstrap-css -->
 k href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
 <!--// bootstrap-css -->
 k rel="stylesheet" href="css/style.css" type="text/css" media="all" />
 <!-- font-awesome icons -->
 k href="css/font-awesome.css" rel="stylesheet">
 <!-- //font-awesome icons -->
 \langle link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
 link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
 <script src="js/jquery-1.11.1.min.js"></script>
 <script src="js/bootstrap.js"></script>
 <script type="text/javascript">
  jQuery(document).ready(function($) {
    $(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
 <!--[if lt IE 9]>
  <script type="text/javascript">
function valid()
if(document.chngpwd.newpassword.value!= document.chngpwd.confirmpassword.value)
alert("New Password and Confirm Password Field do not match !!");
document.chngpwd.confirmpassword.focus();
return false;
return true;
  <div class="banner jarallax">
    <div class="agileinfo-dot">
```

```
<?php include_once('includes/header.php');?>
       <div class="wthree-heading">
         <h2>Forgot Password</h2>
  <div class="contact">
    <div class="container">
       <div class="agile-contact-form">
         <div class="col-md-6 contact-form-left">
           <div class="agileits-contact-address">
         <img src="images/5.jpg" alt="" height="500" width="500">
         <div class="col-md-6 contact-form-right">
           <div class="contact-form-top">
              <h3>Reset Your Password</h3>
           <div class="agileinfo-contact-form-grid">
              <form action="#" method="post" name="chngpwd" onSubmit="return valid();">
                <input type="email" class="form-control" name="email" placeholder="E-mail"</pre>
required="true">
                <input type="text" class="form-control" required="true" name="mobile" maxlength="10"</pre>
pattern="[0-9]+" placeholder="Mobile Number">
                <input type="password"class="form-control" name="newpassword" placeholder="New</pre>
Password" required="true"/>
                <input type="password" name="confirmpassword" placeholder="Confirm Password"
class="form-control" required="true" />
                <div class="forgot">
                                   <a href="login.php">Already have an account</a>
                <button class="btn1" name="submit">Reset</button>
         <div class="clearfix"> </div>
```

```
<?php include_once('includes/footer.php');?>
 <script src="js/jarallax.js"></script>
 <script src="js/SmoothScroll.min.js"></script>
 <script type="text/javascript">
   /* init Jarallax */
   $('.jarallax').jarallax({
      speed: 0.5,
      imgWidth: 1366,
      imgHeight: 768
 <script src="js/SmoothScroll.min.js"></script>
 <script type="text/javascript" src="js/move-top.js"></script>
 <script type="text/javascript" src="js/easing.js"></script>
 <script type="text/javascript">
   $(document).ready(function() {
        containerID: 'toTop', // fading element id
      $().UItoTop({ easingType: 'easeOutQuart' });
<script src="js/modernizr.custom.js"></script>
```

10. Profile.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['obbsuid']==0)) {</pre>
```

```
header('location:logout.php');
 } else{
  if(isset($_POST['submit']))
  $uid=$_SESSION['obbsuid'];
  $AName=$_POST['fname'];
  $mobno=$_POST['mobno'];
 $sql="update tbluser set FullName=:name,MobileNumber=:mobno where ID=:uid";
   $query = $dbh->prepare($sql);
   $query->bindParam(':name',$AName,PDO::PARAM_STR);
   $query->bindParam(':mobno',$mobno,PDO::PARAM_STR);
   $query->bindParam(':uid',$uid,PDO::PARAM_STR);
$query->execute();
     echo '<script>alert("Profile has been updated")</script>';
echo "<script>window.location.href ='profile.php'</script>";
 <!DOCTYPE html>
 <html lang="en">
 <title>Online Banquet Booking System | User Profile</title>
 <script type="application/x-javascript"> addEventListener("load", function() { setTimeout(hideURLbar, 0); },
false); function hideURLbar(){ window.scrollTo(0,1); } </script>
 <!-- bootstrap-css -->
 link href="css/bootstrap.css" rel="stylesheet" type="text/css" media="all" />
 <!--// bootstrap-css -->
 k rel="stylesheet" href="css/style.css" type="text/css" media="all" />
 <!-- font-awesome icons -->
 k href="css/font-awesome.css" rel="stylesheet">
 <!-- //font-awesome icons -->
 link href="//fonts.googleapis.com/css?family=Josefin+Sans:100,100i,300,300i,400,400i,600,600i,700,700i"
rel="stylesheet">
 link href='//fonts.googleapis.com/css?family=Roboto+Condensed:400,700italic,700,400italic,300italic,300'
rel='stylesheet' type='text/css'>
<script src="js/jquery-1.11.1.min.js"></script>
 <script src="js/bootstrap.js"></script>
 <script type="text/javascript">
  ¡Query(document).ready(function($) {
```

```
$(".scroll").click(function(event){
       event.preventDefault();
       $('html,body').animate({scrollTop:$(this.hash).offset().top},1000);
  <div class="banner jarallax">
    <div class="agileinfo-dot">
       <?php include_once('includes/header.php');?>
      <div class="wthree-heading">
         <h2>Profile</h2>
  <div class="contact">
    <div class="container">
       <div class="agile-contact-form">
         <div class="col-md-6 contact-form-right">
           <div class="contact-form-top">
              <h3>User Profile </h3>
           <div class="agileinfo-contact-form-grid">
              <form method="post">
$uid=$_SESSION['obbsuid'];
$sql="SELECT * from tbluser where ID=:uid";
$query = $dbh -> prepare($sql);
$query->bindParam(':uid',$uid,PDO::PARAM_STR);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
if(\text{query-}>rowCount() > 0)
foreach($results as $row)
          ?><div class="form-group row">
                            <a href="col-form-label col-md-4">Full Name:</label>
                     <div class="col-md-12">
                       <input type="text" value="<?php echo $row->FullName;?>" name="fname"
required="true" class="form-control" >
                            <div class="form-group row">
```

```
<label class="col-form-label col-md-4">Mobile Number</label>
                     <div class="col-md-12">
                       <input type="text" name="mobno" class="form-control" required="true"</pre>
maxlength="10" pattern="[0-9]+" value="<?php echo $row->MobileNumber;?>">
                             <div class="form-group row">
                     <label class="col-form-label col-md-4">Email Address</label>
                     <div class="col-md-12">
                       <input type="email" class="form-control" value="<?php echo $row->Email;?>"
name="email" required="true" readonly title="Email can't be edit">
                            <div class="form-group row">
                     <label class="col-form-label col-md-4">Registration Date</label>
                     <div class="col-md-12">
                       <input type="text" value="<?php echo $row->RegDate;?>" class="form-control"
name="password" readonly="true">
                   </div><?php $cnt=$cnt+1;}} ?>
                            <div class="tp">
                               <button type="submit" class="btn btn-primary"</pre>
name="submit">Update</button>
         <div class="clearfix"> </div>
  <?php include_once('includes/footer.php');?>
  <script src="js/jarallax.js"></script>
  <script src="js/SmoothScroll.min.js"></script>
  <script type="text/javascript">
    /* init Jarallax */
    $('.jarallax').jarallax({
       speed: 0.5,
       imgWidth: 1366,
       imgHeight: 768
```

ADMIN MODULES

1. add-events.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['odmsaid']==0)) {
  header('location:logout.php');
  } else{
   if(isset($_POST['submit']))
  {</pre>
```

```
$etype=$_POST['eventtype'];
$serprice=$ POST['serprice'];
$sql="insert into tbleventtype(EventType)values(:etype)";
$query=$dbh->prepare($sq1);
$query->bindParam(':etype',$etype,PDO::PARAM_STR);
 $query->execute();
   $LastInsertId=$dbh->lastInsertId();
  if ($LastInsertId>0) {
    echo '<script>alert("Event Type has been added.")</script>';
echo "<script>window.location.href ='add-event-type.php'</script>";
  else
         echo '<script>alert("Something Went Wrong. Please try
again")</script>';
<!doctype html>
 <html lang="en" class="no-focus"> <!--<![endif]-->
 <title>Online Banquet Booking System - Add Event Type</title>
<link rel="stylesheet" id="css-main" href="assets/css/codebase.min.css">
</head>
    <body>
        <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
             <?php include_once('includes/sidebar.php');?>
          <?php include_once('includes/header.php');?>
            <!-- Main Container -->
            <main id="main-container">
                <!-- Page Content -->
                <div class="content">
                    <h2 class="content-heading">Add Event Type</h2>
                    <div class="row">
```

```
<div class="col-md-12">
                             <!-- Bootstrap Register -->
                             <div class="block block-themed">
                                  <div class="block-header bg-gd-emerald">
                                      <h3 class="block-title">Add Event
Type</h3>
                                      <div class="block-options">
                                          <button type="button" class="btn-</pre>
block-option" data-toggle="block-option" data-action="state_toggle" data-
action-mode="demo">
                                              <i class="si si-refresh"></i></i>
                                          </button>
                                          <button type="button" class="btn-</pre>
block-option" data-toggle="block-option" data-
action="content toggle"></button>
                                      </div>
                                  </div>
                                  <div class="block-content">
                                      <form method="post">
                                          <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-email">Event Type:</label>
                                              <div class="col-12">
                                                    <input type="text"</pre>
class="form-control" name="eventtype" value="" required='true'>
                                              </div>
                                          </div>
                                          <div class="form-group row">
                                              <div class="col-12">
                                                  <button type="submit"</pre>
class="btn btn-alt-success" name="submit">
                                                       <i class="fa fa-plus mr-</pre>
5"></i> Add
                                                  </button>
                                              </div>
                                          </div>
                                      </form>
                                  </div>
                             </div>
                         </div>
                        </div>
                 </div>
```

```
</main>
          <?php include once('includes/footer.php');?>
        </div>
        <!-- END Page Container -->
        <!-- Codebase Core JS -->
        <script src="assets/js/core/jquery.min.js"></script>
        <script src="assets/js/core/popper.min.js"></script>
        <script src="assets/js/core/bootstrap.min.js"></script>
        <script src="assets/js/core/jquery.slimscroll.min.js"></script>
        <script src="assets/js/core/jquery.scrollLock.min.js"></script>
        <script src="assets/js/core/jquery.appear.min.js"></script>
        <script src="assets/js/core/jquery.countTo.min.js"></script>
        <script src="assets/js/core/js.cookie.min.js"></script>
        <script src="assets/js/codebase.js"></script>
    </body>
</html>
<?php } ?>
```

2. manage-events.php

```
<?php
session_start();
error reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['odmsaid']==0)) {
  header('location:logout.php');
  } else{
// Code for deleting product from cart
if(isset($_GET['delid']))
$rid=intval($_GET['delid']);
$sql="delete from tbleventtype where ID=:rid";
$query=$dbh->prepare($sq1);
$query->bindParam(':rid',$rid,PDO::PARAM_STR);
$query->execute();
 echo "<script>alert('Data deleted');</script>";
  echo "<script>window.location.href = 'manage-event-type.php'</script>";
<!doctype html>
```

```
<html lang="en" class="no-focus"> <!--<![endif]-->
   <head>
       <title>Online Banquet Booking System - Manage Event Type</title>
       <link rel="stylesheet"</pre>
href="assets/js/plugins/datatables/dataTables.bootstrap4.min.css">
       <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
   </head>
   <body>
       <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
          <?php include_once('includes/sidebar.php');?>
         <?php include_once('includes/header.php');?>
           <!-- Main Container -->
           <main id="main-container">
               <!-- Page Content -->
               <div class="content">
                   <h2 class="content-heading">Manage Event Type</h2>
                   <!-- Dynamic Table Full Pagination -->
                   <div class="block">
                       <div class="block-header block-header-default">
                          <h3 class="block-title">Manage Event Type</h3>
                      </div>
                       <div class="block-content block-content-full">
                          <!-- DataTables init on table by adding .js-
dataTable-full-pagination class, functionality initialized in
js/pages/be_tables_datatables.js -->
                          <table class="table table-bordered table-striped"
table-vcenter js-dataTable-full-pagination">
                              <thead>
                                  Event Name
                                      Creation Date
                                      <th class="d-none d-sm-table-
cell">Creation Date
                                     style="width: 15%;">Action
```

```
</thead>
                          <?php
$sql="SELECT * from tbleventtype";
$query = $dbh -> prepare($sq1);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
foreach($results as $row)
                                 <?php echo
<?php echo
htmlentities($row->EventType);?>
                                 <td class="d-none d-sm-table-
cell"><?php echo htmlentities($row->CreationDate);?>
                                 <span class="badge badge-</pre>
primary"><?php echo htmlentities($row->CreationDate);?></span>
                                 <a
href="manage-event-type.php?delid=<?php echo ($row->ID);?>" onclick="return
confirm('Do you really want to Delete ?');"><i class="fa fa-trash fa-delete"</pre>
aria-hidden="true"></i></a>
                              <?php $cnt=$cnt+1;}} ?>
                          </div>
                </div>
                <!-- END Dynamic Table Full Pagination -->
                <!-- END Dynamic Table Simple -->
             <!-- END Page Content -->
          </main>
          <!-- END Main Container -->
         <?php include_once('includes/footer.php');?>
      </div>
```

```
<script src="assets/js/core/jquery.min.js"></script>
        <script src="assets/js/core/popper.min.js"></script>
        <script src="assets/js/core/bootstrap.min.js"></script>
        <script src="assets/js/core/jquery.slimscroll.min.js"></script>
        <script src="assets/js/core/jquery.scrollLock.min.js"></script>
        <script src="assets/js/core/jquery.appear.min.js"></script>
        <script src="assets/js/core/jquery.countTo.min.js"></script>
        <script src="assets/js/core/js.cookie.min.js"></script>
        <script src="assets/js/codebase.js"></script>
        <!-- Page JS Plugins -->
        <script
src="assets/js/plugins/datatables/jquery.dataTables.min.js"></script>
src="assets/js/plugins/datatables/dataTables.bootstrap4.min.js"></script>
        <!-- Page JS Code -->
        <script src="assets/js/pages/be_tables_datatables.js"></script>
    </body>
</html>
<?php } ?>
```

3. add-services.php

```
<?php
session_start();//start session
error_reporting(0);// hide php error
include('includes/dbconnection.php'); //database connection file used to
connect code to the db

//whether admin is logged in or not
if (strlen($_SESSION['odmsaid']==0)) {
   header('location:logout.php');
   } else{
      if(isset($_POST['submit']))
   {

$sername=$_POST['sername'];
$serdes=$_POST['serdes'];
$serprice=$_POST['serprice'];

$sql="insert into
tblservice(ServiceName,SerDes,ServicePrice)values(:sername,:serdes,:serprice)";
}
</pre>
```

```
$query=$dbh->prepare($sq1);
$query->bindParam(':sername',$sername,PDO::PARAM STR);
$query->bindParam(':serdes',$serdes,PD0::PARAM STR);
$query->bindParam(':serprice',$serprice,PDO::PARAM_STR);
$query->execute();
   $LastInsertId=$dbh->lastInsertId();
  //it means that new data has benn add into the table
  if ($LastInsertId>0) {
   //pop-up the message that service being added
   echo '<script>alert("Services has been added.")</script>';
   echo "<script>window.location.href ='add-services.php'</script>";
 else
        //if false then try again
        echo '<script>alert("Something Went Wrong. Please try
again")</script>';
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
    <head>
<title>Online Banquet Booking System - Add Services</title>
<link rel="stylesheet" id="css-main" href="assets/css/codebase.min.css">
</head>
    <body>
        <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
             <?php include_once('includes/sidebar.php');?>
          <?php include_once('includes/header.php');?>
            <!-- Main Container -->
            <main id="main-container">
                <!-- Page Content -->
                <div class="content">
                    <!-- Register Forms -->
```

```
<h2 class="content-heading">Add Services</h2>
                     <div class="row">
                         <div class="col-md-12">
                             <!-- Bootstrap Register -->
                             <div class="block block-themed">
                                  <div class="block-header bg-gd-emerald">
                                      <h3 class="block-title">Add Services</h3>
                                      <div class="block-options">
                                          <button type="button" class="btn-</pre>
block-option" data-toggle="block-option" data-action="state_toggle" data-
action-mode="demo">
                                              <i class="si si-refresh"></i></i>
                                          </button>
                                          <button type="button" class="btn-</pre>
block-option" data-toggle="block-option" data-
action="content toggle"></button>
                                      </div>
                                 </div>
                                 <div class="block-content">
                                      <form method="post">
                                          <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-email">Service Name:</label>
                                              <div class="col-12">
                                                   <input type="text"</pre>
class="form-control" name="sername" value="" required='true'>
                                              </div>
                                          </div>
                                          <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-email">Service Description:</label>
                                              <div class="col-12">
                                                   <textarea type="text"
class="form-control" name="serdes" value="" required='true'></textarea>
                                              </div>
                                          </div>
                                          <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-password">Service Price:</label>
                                              <div class="col-12">
                                                  <input type="text"</pre>
class="form-control" name="serprice" value="" required='true'>
```

```
</div>
                                         <div class="form-group row">
                                             <div class="col-12">
                                                 <button type="submit"</pre>
class="btn btn-alt-success" name="submit">
                                                     <i class="fa fa-plus mr-
5"></i> Add
                                                 </button>
                                             </div>
                                         </div>
                                     </form>
                                </div>
                            </div>
                            <!-- END Bootstrap Register -->
                        </div>
                       </div>
                <!-- END Page Content -->
            </main>
            <!-- END Main Container -->
          <?php include_once('includes/footer.php');?>
        </div>
        <!-- END Page Container -->
        <!-- Codebase Core JS -->
        <script src="assets/js/core/jquery.min.js"></script>
        <script src="assets/js/core/popper.min.js"></script>
        <script src="assets/js/core/bootstrap.min.js"></script>
        <script src="assets/js/core/jquery.slimscroll.min.js"></script>
        <script src="assets/js/core/jquery.scrollLock.min.js"></script>
        <script src="assets/js/core/jquery.appear.min.js"></script>
        <script src="assets/js/core/jquery.countTo.min.js"></script>
        <script src="assets/js/core/js.cookie.min.js"></script>
        <script src="assets/js/codebase.js"></script>
    </body>
</html>
<?php } ?>
```

4. manage-services.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['odmsaid']==0)) {</pre>
```

```
header('location:logout.php');
  } else{
// Code for deleting product from cart
if(isset($ GET['delid']))
$rid=intval($ GET['delid']);
$sql="delete from tblservice where ID=:rid";
$query=$dbh->prepare($sq1);
$query->bindParam(':rid',$rid,PDO::PARAM_STR);
$query->execute();
 echo "<script>alert('Data deleted');</script>";
  echo "<script>window.location.href = 'manage-services.php'</script>";
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
        <title>Online Banquet Booking System - Manage Services</title>
        <link rel="stylesheet"</pre>
href="assets/js/plugins/datatables/dataTables.bootstrap4.min.css">
        <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
    </head>
    <body>
        <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
           <?php include_once('includes/sidebar.php');?>
          <?php include_once('includes/header.php');?>
            <!-- Main Container -->
            <main id="main-container">
                <!-- Page Content -->
                <div class="content">
                    <h2 class="content-heading">Manage Services</h2>
                    <!-- Dynamic Table Full Pagination -->
                    <div class="block">
```

```
<div class="block-header block-header-default">
                      <h3 class="block-title">Manage Services</h3>
                   </div>
                   <div class="block-content block-content-full">
                      <!-- DataTables init on table by adding .js-
dataTable-full-pagination class, functionality initialized in
js/pages/be_tables_datatables.js -->
                      <table class="table table-bordered table-striped"
table-vcenter js-dataTable-full-pagination">
                            Service Name
                                cell">Service Price
                               <th class="d-none d-sm-table-
cell">Creation Date
                               style="width: 15%;">Action
                               </thead>
                         <?php
$sql="SELECT * from tblservice";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
foreach($results as $row)
                            <?php echo
<?php echo
htmlentities($row->ServiceName);?>
                                <td class="d-none d-sm-table-
cell">$<?php echo htmlentities($row->ServicePrice);?>
                                <span class="badge badge-</pre>
primary"><?php echo htmlentities($row->CreationDate);?></span>
                                <a
href="manage-services.php?delid=<?php echo ($row->ID);?>" onclick="return
confirm('Do you really want to Delete ?');"><i class="fa fa-trash fa-delete"</pre>
aria-hidden="true"></i></a>
```

```
<?php $cnt=$cnt+1;}} ?>
                               </div>
                    </div>
                    <!-- END Dynamic Table Simple -->
                </div>
                <!-- END Page Content -->
            </main>
            <!-- END Main Container -->
           <?php include_once('includes/footer.php');?>
        </div>
        <!-- END Page Container -->
        <!-- Codebase Core JS -->
        <script src="assets/js/core/jquery.min.js"></script>
        <script src="assets/js/core/popper.min.js"></script>
        <script src="assets/js/core/bootstrap.min.js"></script>
        <script src="assets/js/core/jquery.slimscroll.min.js"></script>
        <script src="assets/js/core/jquery.scrollLock.min.js"></script>
        <script src="assets/js/core/jquery.appear.min.js"></script>
        <script src="assets/js/core/jquery.countTo.min.js"></script>
        <script src="assets/js/core/js.cookie.min.js"></script>
        <script src="assets/js/codebase.js"></script>
        <!-- Page JS Plugins -->
        <script
src="assets/js/plugins/datatables/jquery.dataTables.min.js"></script>
        <script
src="assets/js/plugins/datatables/dataTables.bootstrap4.min.js"></script>
        <!-- Page JS Code -->
        <script src="assets/js/pages/be_tables_datatables.js"></script>
    </body>
</html>
<?php } ?>
```

5. admin-profile.php

```
<?php
session_start();</pre>
```

```
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($ SESSION['odmsaid']==0)) {
  header('location:logout.php');
  } else{
    if(isset($ POST['submit']))
    $adminid=$_SESSION['odmsaid'];
    $AName=$ POST['adminname'];
  $mobno=$_POST['mobilenumber'];
  $email=$_POST['email'];
  $sql="update tbladmin set
AdminName=:adminname, MobileNumber=:mobilenumber, Email=:email where ID=:aid";
     $query = $dbh->prepare($sq1);
     $query->bindParam(':adminname',$AName,PDO::PARAM STR);
     $query->bindParam(':email',$email,PDO::PARAM STR);
     $query->bindParam(':mobilenumber',$mobno,PDO::PARAM_STR);
     $query->bindParam(':aid',$adminid,PDO::PARAM_STR);
$query->execute();
        echo '<script>alert("Profile has been updated")</script>';
<!doctype html>
 <html lang="en" class="no-focus"> <!--<![endif]-->
 <title>Online Banquet Booking System - Admin Profile</title>
<link rel="stylesheet" id="css-main" href="assets/css/codebase.min.css">
</head>
    <body>
        <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
             <?php include_once('includes/sidebar.php');?>
          <?php include_once('includes/header.php');?>
            <!-- Main Container -->
            <main id="main-container">
                <!-- Page Content -->
                <div class="content">
                    <h2 class="content-heading">Admin Profile</h2>
```

```
<div class="row">
                         <div class="col-md-12">
                             <!-- Bootstrap Register -->
                             <div class="block block-themed">
                                 <div class="block-header bg-gd-emerald">
                                     <h3 class="block-title">Admin Profile</h3>
                                     <div class="block-options">
                                          <button type="button" class="btn-</pre>
block-option" data-toggle="block-option" data-action="state_toggle" data-
action-mode="demo">
                                              <i class="si si-refresh"></i></i>
                                          </button>
                                          <button type="button" class="btn-</pre>
block-option" data-toggle="block-option" data-
action="content toggle"></button>
                                     </div>
                                 </div>
                                 <div class="block-content">
                                     <?php
$sql="SELECT * from tbladmin";
$query = $dbh -> prepare($sql);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
foreach($results as $row)
                                     <form method="post">
                                          <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-username">Admin Name:</label>
                                              <div class="col-12">
                                                  <input type="text"</pre>
class="form-control" name="adminname" value="<?php echo $row->AdminName;?>"
required='true'>
                                              </div>
                                          </div>
                                          <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-email">User Name:</label>
                                              <div class="col-12">
                                                   <input type="text"</pre>
class="form-control" name="username" value="<?php echo $row->UserName;?>"
readonly="true">
                                              </div>
                                         </div>
```

```
<div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-password">Email:</label>
                                              <div class="col-12">
                                                   <input type="email"</pre>
class="form-control" name="email" value="<?php echo $row->Email;?>"
required='true'>
                                              </div>
                                          </div>
                                           <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-password">Contact Number:</label>
                                              <div class="col-12">
                                                   <input type="text"</pre>
class="form-control" name="mobilenumber" value="<?php echo $row-</pre>
>MobileNumber;?>" required='true' maxlength='10'>
                                              </div>
                                          </div>
                                           <div class="form-group row">
                                              <label class="col-12"</pre>
for="register1-password">Admin Registration Date:</label>
                                              <div class="col-12">
                                                    <input type="text"</pre>
class="form-control" id="email2" name="" value="<?php echo $row-</pre>
>AdminRegdate;?>" readonly="true">
                                              </div>
                                          </div>
                                        <?php $cnt=$cnt+1;}} ?>
                                          <div class="form-group row">
                                              <div class="col-12">
                                                   <button type="submit"</pre>
class="btn btn-alt-success" name="submit">
                                                       <i class="fa fa-plus mr-
5"></i> Update
                                                   </button>
                                              </div>
                                          </div>
                                      </form>
                                  </div>
                             </div>
                             <!-- END Bootstrap Register -->
                         </div>
                        </div>
                 </div>
                 <!-- END Page Content -->
            </main>
```

```
<!-- END Main Container -->
         <?php include_once('includes/footer.php');?>
       </div>
       <!-- END Page Container -->
       <!-- Codebase Core JS -->
       <script src="assets/js/core/jquery.min.js"></script>
       <script src="assets/js/core/popper.min.js"></script>
       <script src="assets/js/core/bootstrap.min.js"></script>
       <script src="assets/js/core/jquery.slimscroll.min.js"></script>
       <script src="assets/js/core/jquery.scrollLock.min.js"></script>
       <script src="assets/js/core/jquery.appear.min.js"></script>
       <script src="assets/js/core/jquery.countTo.min.js"></script>
       <script src="assets/js/core/js.cookie.min.js"></script>
       <script src="assets/js/codebase.js"></script>
   </body>
<?php } ?>
```

6. approved.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($ SESSION['odmsaid']==0)) {
  header('location:logout.php');
  } else{
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
    <head>
        <title>Online Banquet Booking System - Approved Booking</title>
        <link rel="stylesheet"</pre>
href="assets/js/plugins/datatables/dataTables.bootstrap4.min.css">
        <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
    </head>
    <body>
```

```
<div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
         <?php include_once('includes/sidebar.php');?>
        <?php include once('includes/header.php');?>
          <!-- Main Container -->
          <main id="main-container">
             <!-- Page Content -->
             <div class="content">
                 <h2 class="content-heading">Approved Booking</h2>
                 <!-- Dynamic Table Full Pagination -->
                 <div class="block">
                    <div class="block-header block-header-default">
                        <h3 class="block-title">Approved Booking</h3>
                    </div>
                    <div class="block-content block-content-full">
                        <!-- DataTables init on table by adding .js-
dataTable-full-pagination class, functionality initialized in
js/pages/be_tables_datatables.js -->
                        <table class="table table-bordered table-striped"
table-vcenter js-dataTable-full-pagination">
                           <thead>
                              Booking ID
                                  cell">Cutomer Name
                                  <th class="d-none d-sm-table-
cell">Mobile Number
                                  <th class="d-none d-sm-table-
cell">Email
                                  cell">Booking Date
                                  cell">Status
                                  style="width: 15%;">Action
                                 </thead>
                           <?php
$sql="SELECT tbluser.FullName,tbluser.MobileNumber,tbluser.Email,tblbooking.ID
```

```
bid,tblbooking.BookingID,tblbooking.BookingDate,tblbooking.Status,tblbooking.I
D from tblbooking join tbluser on tbluser.ID=tblbooking.UserID where
tblbooking.Status='Approved'";
$query = $dbh -> prepare($sq1);
$query->execute();
$results=$query->fetchAll(PDO::FETCH OBJ);
$cnt=1;
if($query->rowCount() > 0)
foreach($results as $row)
                          <?php echo
<?php echo
htmlentities($row->BookingID);?>
                             <?php echo
htmlentities($row->FullName);?>
                             <?php echo
htmlentities($row->MobileNumber);?>
                             <?php echo
<span class="badge badge-</pre>
primary"><?php echo htmlentities($row->BookingDate);?></span>
                             <?php if($row->Status==""){ ?>
               <?php echo "Not Updated Yet";
?>
<?php } else { ?>
                             <span class="badge badge-</pre>
primary"><?php echo htmlentities($row->Status);?></span>
                             <?php } ?>
                              <a
href="view-booking-detail.php?editid=<?php echo htmlentities ($row->ID);?>"><i</pre>
class="fa fa-eye" aria-hidden="true"></i></a>
                          <?php $cnt=$cnt+1;}} ?>
                       </div>
```

```
</div>
                    <!-- END Dynamic Table Full Pagination -->
                <!-- END Page Content -->
            </main>
            <!-- END Main Container -->
           <?php include_once('includes/footer.php');?>
        </div>
        <!-- END Page Container -->
        <script src="assets/js/core/jquery.min.js"></script>
        <script src="assets/js/core/popper.min.js"></script>
        <script src="assets/js/core/bootstrap.min.js"></script>
        <script src="assets/js/core/jquery.slimscroll.min.js"></script>
        <script src="assets/js/core/jquery.scrollLock.min.js"></script>
        <script src="assets/js/core/jquery.appear.min.js"></script>
        <script src="assets/js/core/jquery.countTo.min.js"></script>
        <script src="assets/js/core/js.cookie.min.js"></script>
        <script src="assets/js/codebase.js"></script>
        <!-- Page JS Plugins -->
        <script
src="assets/js/plugins/datatables/jquery.dataTables.min.js"></script>
src="assets/js/plugins/datatables/dataTables.bootstrap4.min.js"></script>
        <!-- Page JS Code -->
        <script src="assets/js/pages/be_tables_datatables.js"></script>
    </body>
<?php } ?>
```

7. cancelled-booking.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['odmsaid']==0)) {
  header('location:logout.php');
  } else{</pre>
```

```
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
    <head>
       <title>Online Banquet Booking System - Cancelled Booking</title>
       <link rel="stylesheet"</pre>
href="assets/js/plugins/datatables/dataTables.bootstrap4.min.css">
       <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
    </head>
    <body>
       <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
          <?php include_once('includes/sidebar.php');?>
         <?php include_once('includes/header.php');?>
           <!-- Main Container -->
           <main id="main-container">
               <!-- Page Content -->
               <div class="content">
                   <h2 class="content-heading">Cancelled Booking</h2>
                   <!-- Dynamic Table Full Pagination -->
                   <div class="block">
                       <div class="block-header block-header-default">
                           <h3 class="block-title">Cancelled Booking</h3>
                       <div class="block-content block-content-full">
                          <!-- DataTables init on table by adding .js-
dataTable-full-pagination class, functionality initialized in
js/pages/be_tables_datatables.js -->
                          <table class="table table-bordered table-striped"
table-vcenter js-dataTable-full-pagination">
                              <thead>
                                  Booking ID
                                      cell">Cutomer Name
```

```
cell">Mobile Number
                           <th class="d-none d-sm-table-
cell">Email
                           cell">Booking Date
                           cell">Status
                           style="width: 15%;">Action
                          </thead>
                     <?php
$sql="SELECT tbluser.FullName,tbluser.MobileNumber,tbluser.Email,tblbooking.ID
bid, tblbooking. BookingID, tblbooking. BookingDate, tblbooking. Status, tblbooking. I
D from tblbooking join tbluser on tbluser.ID=tblbooking.UserID where
tblbooking.Status='Cancelled'";
$query = $dbh -> prepare($sq1);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
foreach($results as $row)
                        >
                           <?php echo
<?php echo
htmlentities($row->BookingID);?>
                           <?php echo
<?php echo
htmlentities($row->MobileNumber);?>
                           <?php echo
<span class="badge badge-</pre>
primary"><?php echo htmlentities($row->BookingDate);?></span>
                           <?php if($row->Status==""){ ?>
              <?php echo "Not Updated Yet";
?>
<?php } else { ?>
```

```
<span class="badge badge-</pre>
primary"><?php echo htmlentities($row->Status);?></span>
<?php } ?>
                                       <a
href="view-booking-detail.php?editid=<?php echo htmlentities ($row-</pre>
>ID);?>&&bookingid=<?php echo htmlentities ($row->BookingID);?>"><i class="fa</pre>
fa-eye" aria-hidden="true"></i></a>
                                  <?php $cnt=$cnt+1;}} ?>
                              </div>
                   </div>
                   <!-- END Dynamic Table Simple -->
               </div>
               <!-- END Page Content -->
           </main>
           <!-- END Main Container -->
          <?php include_once('includes/footer.php');?>
       </div>
       <!-- END Page Container -->
       <!-- Codebase Core JS -->
       <script src="assets/js/core/jquery.min.js"></script>
       <script src="assets/js/core/popper.min.js"></script>
       <script src="assets/js/core/bootstrap.min.js"></script>
       <script src="assets/js/core/jquery.slimscroll.min.js"></script>
       <script src="assets/js/core/jquery.scrollLock.min.js"></script>
       <script src="assets/js/core/jquery.appear.min.js"></script>
       <script src="assets/js/core/jquery.countTo.min.js"></script>
       <script src="assets/js/core/js.cookie.min.js"></script>
       <script src="assets/js/codebase.js"></script>
       <!-- Page JS Plugins -->
       <script
src="assets/js/plugins/datatables/jquery.dataTables.min.js"></script>
src="assets/js/plugins/datatables/dataTables.bootstrap4.min.js"></script>
       <!-- Page JS Code -->
```

8. login.php

```
<?php
session_start();
error reporting(0);
include('includes/dbconnection.php');
if(isset($_POST['login']))
    $username=$ POST['username'];
    $password=md5($_POST['password']);
    //query to select ID of the user with the matching username and password
    $sql ="SELECT ID FROM tbladmin WHERE UserName=:username and
Password=:password";
    $query=$dbh->prepare($sq1);
    $query-> bindParam(':username', $username, PDO::PARAM_STR);
$query-> bindParam(':password', $password, PDO::PARAM_STR);
    $query-> execute();
    $results=$query->fetchAll(PDO::FETCH_OBJ);
    if($query->rowCount() > 0)
foreach ($results as $result) {
$ SESSION['odmsaid']=$result->ID;
//if the remeber checkbox is selected the it sets the cookies for username and
 if(!empty($_POST["remember"])) {
//COOKIES for username
setcookie ("user login",$ POST["username"],time()+ (10 * 365 * 24 * 60 * 60));
//COOKIES for password
setcookie ("userpassword",$_POST["password"],time()+ (10 * 365 * 24 * 60 *
60));
else {
    //if the user has unchecked it, it deletes any existing cookies for the
username and password.
if(isset($_COOKIE["user_login"])) {
setcookie ("user login","");
```

```
if(isset($_COOKIE["userpassword"])) {
setcookie ("userpassword","");
$_SESSION['login']=$_POST['username'];
//redirects to the dashboard page.
echo "<script type='text/javascript'> document.location ='dashboard.php';
</script>";
} else{
echo "<script>alert('Invalid Details');</script>";
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
   <head>
       <title>Online Event Booking System - Login Page</title>
       <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
   </head>
   <body>
       <div id="page-container" class="main-content-boxed">
           <!-- Main Container -->
           <main id="main-container">
               <!-- Page Content -->
               <div class="bg-image" style="background-image:</pre>
url('assets/img/photos/photo34@2x.jpg');">
                   <div class="row mx-0 bg-black-op">
                       <div class="hero-static col-md-6 col-xl-8 d-none d-md-</pre>
flex align-items-md-end">
                           <div class="p-30 invisible" data-toggle="appear">
                              Online Event Booking System.
                              Copyright © <span class="js-year-</pre>
copy">2020</span>
                              </div>
                       <div class="hero-static col-md-6 col-xl-4 d-flex</pre>
align-items-center bg-white invisible" data-toggle="appear" data-
class="animated fadeInRight">
                          <div class="content content-full">
```

```
<div class="px-30 py-10">
                                      <a class="link-effect font-w700"</pre>
href="login.php">
                                          <i class="si si-fire"></i>
                                          <span class="font-size-x1">VPS</span>
                                      </a>
                                      <h1 class="h3 font-w700 mt-30 mb-
10">Welcome to Your Dashboard</h1>
                                      <h2 class="h5 font-w400 text-muted mb-
0">Please sign in</h2>
                                  </div>
                                  <form class="js-validation-signin px-30"</pre>
method="post">
                                      <div class="form-group row">
                                          <div class="col-12">
                                              <div class="form-material</pre>
floating">
                                                   <input type="text"</pre>
class="form-control" required="true" name="username" value="<?php</pre>
if(isset($_COOKIE["user_login"])) { echo $_COOKIE["user_login"]; } ?>">
                                                   <label for="login-</pre>
username">Username</label>
                                              </div>
                                          </div>
                                      </div>
                                      <div class="form-group row">
                                          <div class="col-12">
                                              <div class="form-material</pre>
floating">
                                                   <input type="password"</pre>
class="form-control" name="password" required="true" value="<?php
if(isset($_COOKIE["userpassword"])) { echo $_COOKIE["userpassword"]; } ?>">
                                                   <label for="login-</pre>
password">Password</label>
                                              </div>
                                          </div>
                                      </div>
                                      <div class="form-group row">
                                          <div class="checkbox checkbox-
primary">
                 <input type="checkbox" id="remember" name="remember" <?php</pre>
if(isset($_COOKIE["user_login"])) { ?> checked <?php } ?> />
                 <label for="keep_me_logged_in">Keep me signed in</label>
            </div>
                                      </div>
                                      <div class="form-group">
```

```
<button type="submit" class="btn btn-</pre>
sm btn-hero btn-alt-primary" name="login">
                                             <i class="si si-login mr-10"></i>
Sign In
                                         </button>
                                         <div class="mt-30">
                                             <a class="link-effect text-muted")</pre>
mr-10 mb-5 d-inline-block" href="forgot-password.php">
                                                 <i class="fa fa-warning mr-</pre>
5"></i> Forgot Password
                                             </a>
                                             <a href="../index.php">Back
Home!!</a>
                                         </div>
                                     </div>
                                 </form>
                             </div>
                         </div>
                    </div>
                </div>
                <!-- END Page Content -->
            </main>
            <!-- END Main Container -->
        </div>
        <!-- END Page Container -->
        <!-- Codebase Core JS -->
        <script src="assets/js/core/jquery.min.js"></script>
        <script src="assets/js/core/popper.min.js"></script>
        <script src="assets/js/core/bootstrap.min.js"></script>
        <script src="assets/js/core/jquery.slimscroll.min.js"></script>
        <script src="assets/js/core/jquery.scrollLock.min.js"></script>
        <script src="assets/js/core/jquery.appear.min.js"></script>
        <script src="assets/js/core/jquery.countTo.min.js"></script>
        <script src="assets/js/core/js.cookie.min.js"></script>
        <script src="assets/js/codebase.js"></script>
        <!-- Page JS Plugins -->
        <script src="assets/js/plugins/jquery-</pre>
validation/jquery.validate.min.js"></script>
        <!-- Page JS Code -->
        <script src="assets/js/pages/op_auth_signin.js"></script>
    </body>
</html>
```

9. logout.php

```
<?php
session_start();
session_unset();
session_destroy();
header('location:login.php');
?>
```

10. read-queries.php

```
<?php
session_start();
error_reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['odmsaid']==0)) {
  header('location:logout.php');
  } else{
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
        <title>Online Banquet Booking System - Read Queries</title>
        <link rel="stylesheet"</pre>
href="assets/js/plugins/datatables/dataTables.bootstrap4.min.css">
        <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
    </head>
    <body>
        <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
```

```
<?php include_once('includes/sidebar.php');?>
         <?php include once('includes/header.php');?>
           <!-- Main Container -->
           <main id="main-container">
              <!-- Page Content -->
              <div class="content">
                  <h2 class="content-heading">Read Queries</h2>
                  <!-- Dynamic Table Full Pagination -->
                  <div class="block">
                      <div class="block-header block-header-default">
                         <h3 class="block-title">Read Queries</h3>
                      </div>
                      <div class="block-content block-content-full">
                         <!-- DataTables init on table by adding .js-
dataTable-full-pagination class, functionality initialized in
js/pages/be_tables_datatables.js -->
                         <table class="table table-bordered table-striped"
table-vcenter js-dataTable-full-pagination">
                             <thead>
                                 <th class="d-none d-sm-table-
cell">Name
                                    <th class="d-none d-sm-table-
cell">Email
                                    <th class="d-none d-sm-table-
cell">Send Message Date
                                    style="width: 15%;">Action
                                   </thead>
                             <?php
$sql="SELECT * from tblcontact where IsRead='1'";
$query = $dbh -> prepare($sq1);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
```

```
foreach($results as $row)
                                 <?php echo
<?php echo
<?php echo
htmlentities($row->Email);?>
                                 <span class="badge badge-</pre>
primary"><?php echo htmlentities($row->EnquiryDate);?></span>
                                  <a
href="view-user-queries.php?viewid=<?php echo htmlentities ($row->ID);?>"><i</pre>
class="fa fa-eye" aria-hidden="true"></i></a>
                              <?php $cnt=$cnt+1;}} ?>
                          </div>
                </div>
                <!-- END Dynamic Table Full Pagination -->
                <!-- END Dynamic Table Simple -->
             </div>
             <!-- END Page Content -->
          </main>
          <!-- END Main Container -->
         <?php include_once('includes/footer.php');?>
      </div>
      <!-- END Page Container -->
      <!-- Codebase Core JS -->
      <script src="assets/js/core/jquery.min.js"></script>
      <script src="assets/js/core/popper.min.js"></script>
      <script src="assets/js/core/bootstrap.min.js"></script>
      <script src="assets/js/core/jquery.slimscroll.min.js"></script>
      <script src="assets/js/core/jquery.scrollLock.min.js"></script>
      <script src="assets/js/core/jquery.appear.min.js"></script>
```


11. unread-queries.php


```
<?php
session start();
error reporting(0);
include('includes/dbconnection.php');
if (strlen($_SESSION['odmsaid']==0)) {
 header('location:logout.php');
  } else{
<!doctype html>
<html lang="en" class="no-focus"> <!--<![endif]-->
    <head>
        <title>Online Banquet Booking System - Unread Queries</title>
        <link rel="stylesheet"</pre>
href="assets/js/plugins/datatables/dataTables.bootstrap4.min.css">
        <link rel="stylesheet" id="css-main"</pre>
href="assets/css/codebase.min.css">
    </head>
    <body>
        <div id="page-container" class="sidebar-o sidebar-inverse side-scroll</pre>
page-header-fixed main-content-narrow">
           <?php include_once('includes/sidebar.php');?>
```


```
<?php include_once('includes/header.php');?>
          <!-- Main Container -->
          <main id="main-container">
              <!-- Page Content -->
              <div class="content">
                  <h2 class="content-heading">Unread Queries</h2>
                  <!-- Dynamic Table Full Pagination -->
                  <div class="block">
                     <div class="block-header block-header-default">
                         <h3 class="block-title">Unread Queries</h3>
                     </div>
                     <div class="block-content block-content-full">
                         <!-- DataTables init on table by adding .js-
dataTable-full-pagination class, functionality initialized in
js/pages/be_tables_datatables.js -->
                         <table class="table table-bordered table-striped"
table-vcenter js-dataTable-full-pagination">
                                cell">Name
                                   <th class="d-none d-sm-table-
cell">Email
                                   <th class="d-none d-sm-table-
cell">Send Message Date
                                   style="width: 15%;">Action
                                  </thead>
                            <?php
$sql="SELECT * from tblcontact where IsRead is null";
$query = $dbh -> prepare($sq1);
$query->execute();
$results=$query->fetchAll(PDO::FETCH_OBJ);
$cnt=1;
if($query->rowCount() > 0)
foreach($results as $row)
```

```
<?php echo
<?php echo
htmlentities($row->Name);?>
                                  <?php echo
htmlentities($row->Email);?>
                                  <span class="badge badge-</pre>
primary"><?php echo htmlentities($row->EnquiryDate);?></span>
                                  <a
href="view-user-queries.php?viewid=<?php echo htmlentities ($row->ID);?>"><i</pre>
class="fa fa-eye" aria-hidden="true"></i></a>
                           <?php $cnt=$cnt+1;}}    ?>
                           </div>
                 </div>
                 <!-- END Dynamic Table Full Pagination -->
                 <!-- END Dynamic Table Simple -->
             </div>
             <!-- END Page Content -->
          </main>
          <!-- END Main Container -->
         <?php include_once('includes/footer.php');?>
       </div>
       <!-- END Page Container -->
       <!-- Codebase Core JS -->
       <script src="assets/js/core/jquery.min.js"></script>
       <script src="assets/js/core/popper.min.js"></script>
       <script src="assets/js/core/bootstrap.min.js"></script>
       <script src="assets/js/core/jquery.slimscroll.min.js"></script>
       <script src="assets/js/core/jquery.scrollLock.min.js"></script>
       <script src="assets/js/core/jquery.appear.min.js"></script>
       <script src="assets/js/core/jquery.countTo.min.js"></script>
       <script src="assets/js/core/js.cookie.min.js"></script>
```

OUTPUT:

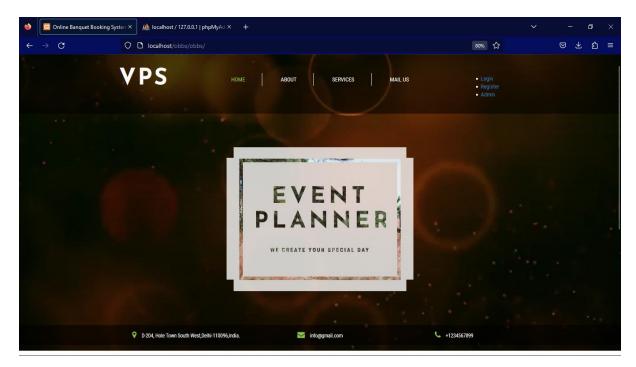

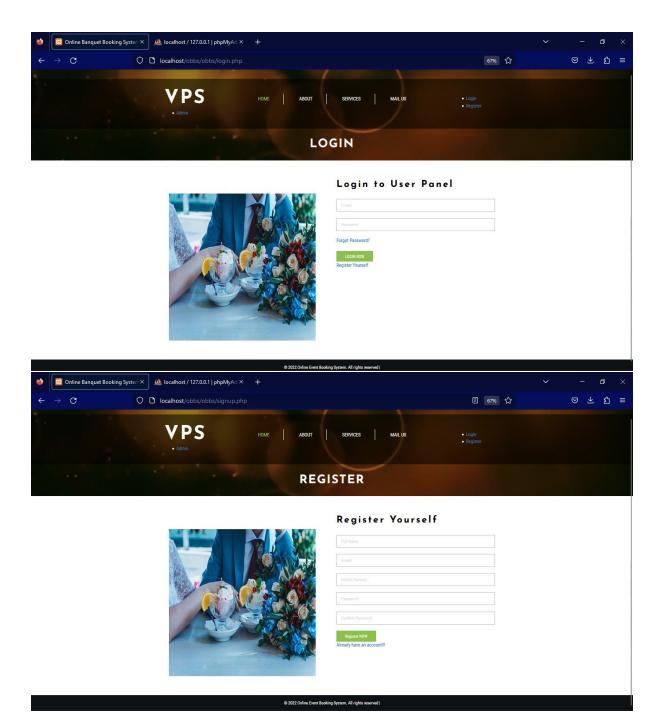

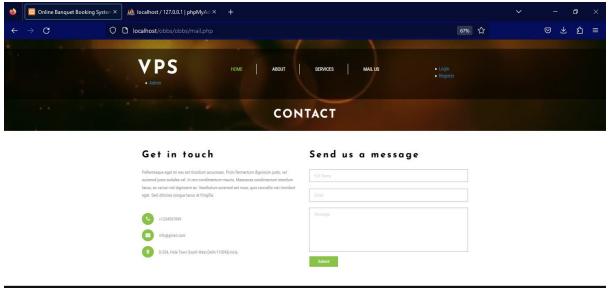

© 2022 Online Event Booking System. All rights reserved |



List of services which is prvided by us.



© 2022 Online Event Booking System. All rights reserved








ABOUT US

Online Event Booking System
VPS is one of the Internet's largest and trusted Online Event Booking Service. VPS has done several placements locally & globally for top artists.


© 2022 Online Event Booking System. All rights reserved |

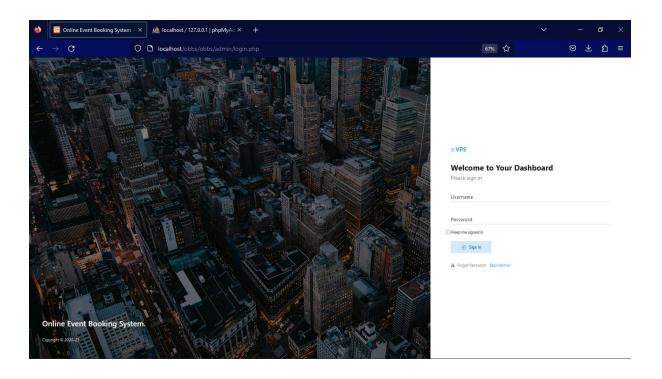


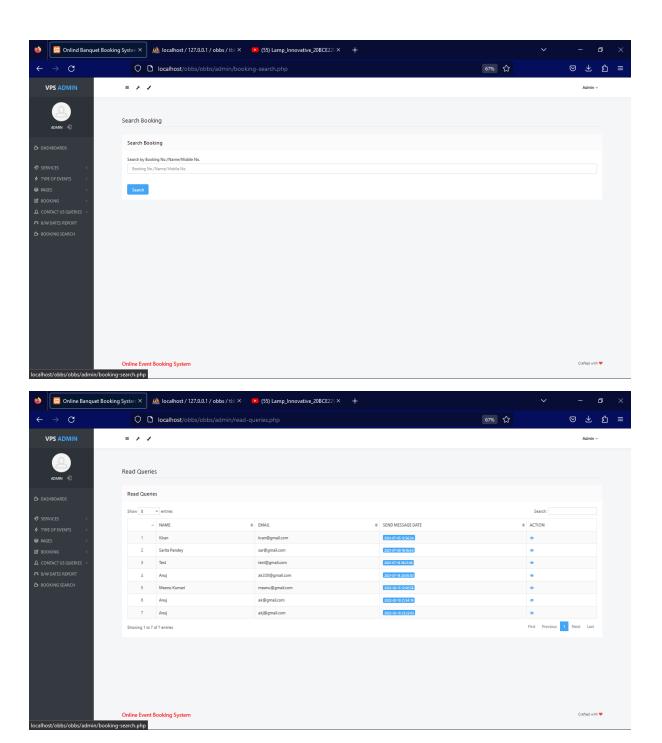


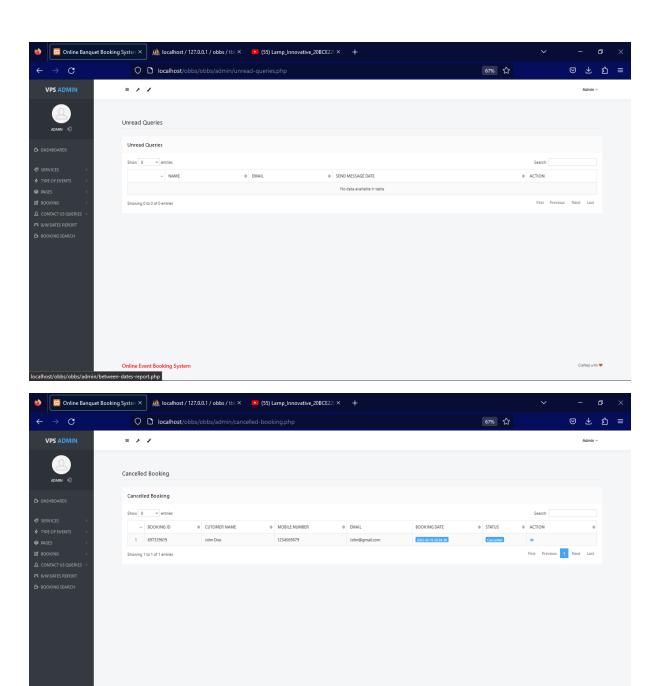



st/obbs/obbs/admin/booking-search.php

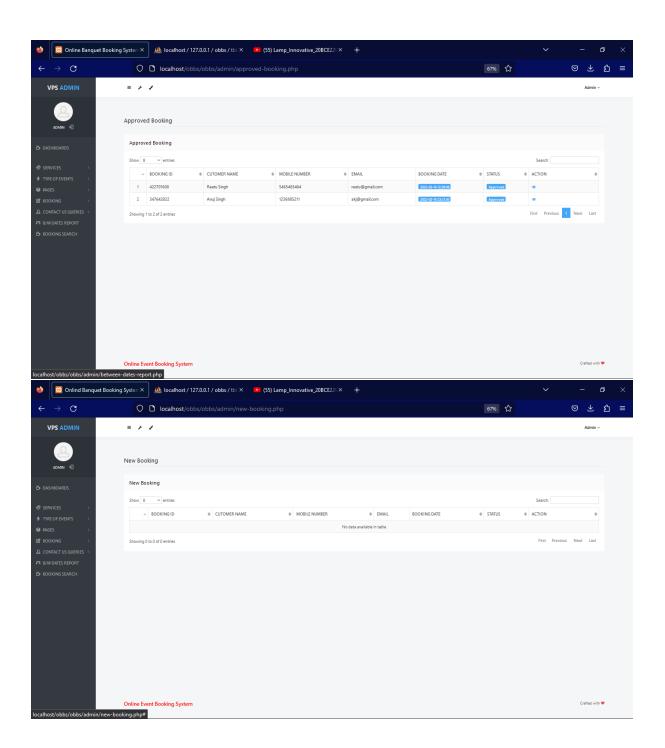


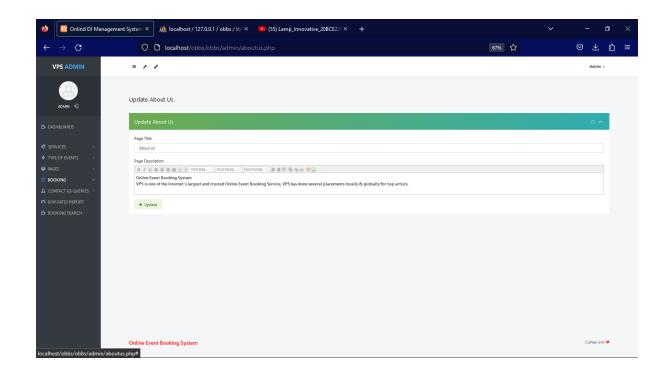

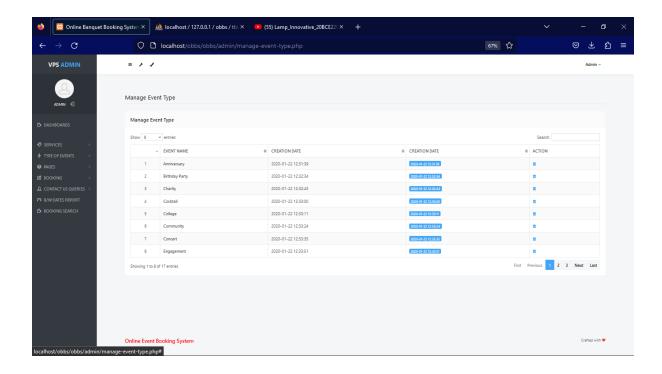

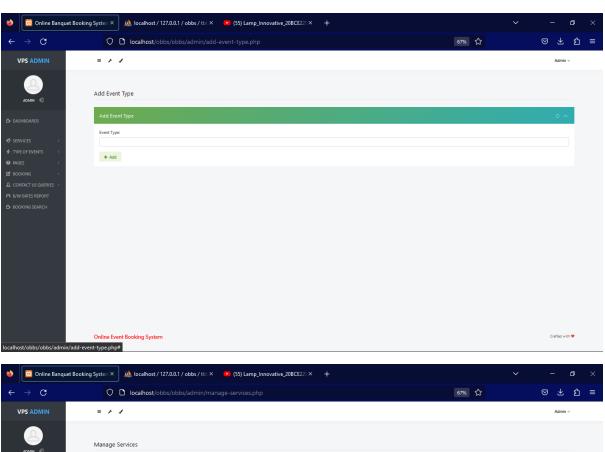

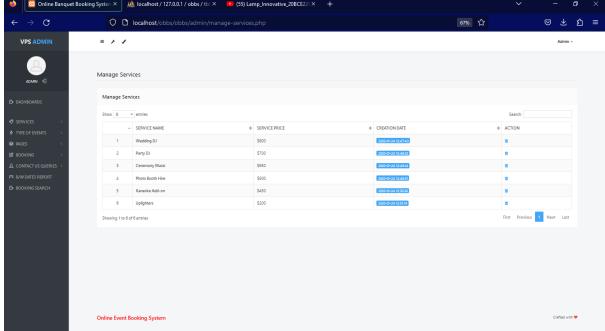

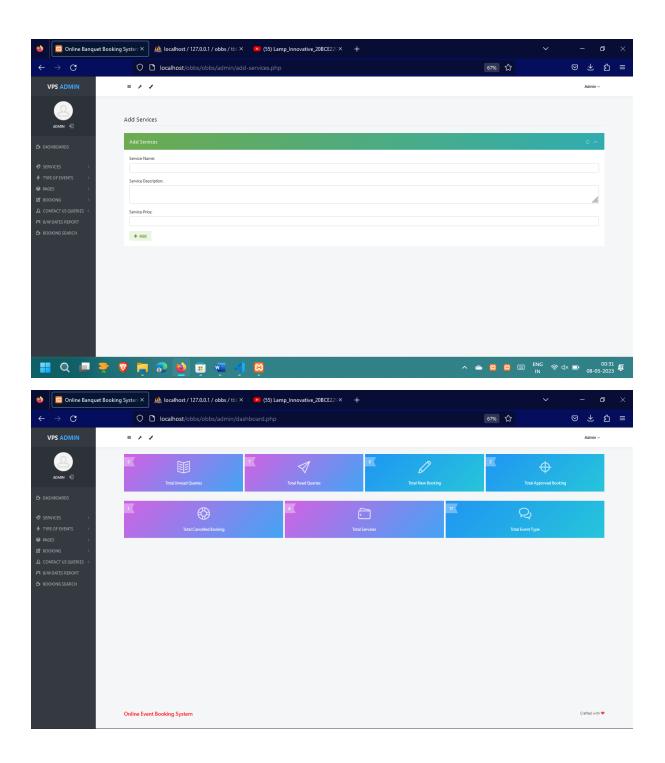

YouTube Video Link:

https://www.youtube.com/watch?v=6VBiUOkAigg&t=1553s

Thank You.