HDOC DAY-57

NAME-PRIYADARSHNA
SAPID-590032928

BATCH-15

Question

Write a C program to find the maximum sum of a contiguous subarray using Kadane's algorithm. Use a variable-length array (VLA) and pass the array to a function max_subarray_sum() using pointers.


Aim

To write a C program to find the maximum subarray sum using Kadane's algorithm, variable-length arrays, and pointers.

Algorithm

1. Start.
2. Read the size n of the array.
3. Declare a variable-length array arr[n].
4. Read n array elements.
5. Pass the array address to max_subarray_sum().
6. Initialize max_sum and current_sum with the first element.
7. Traverse the remaining elements.
8. Update current_sum by taking the maximum of the current element and its sum with the previous current_sum.
9. Update max_sum if current_sum is greater.
10. Display max_sum.
11. Stop.

>C PROGRAM:

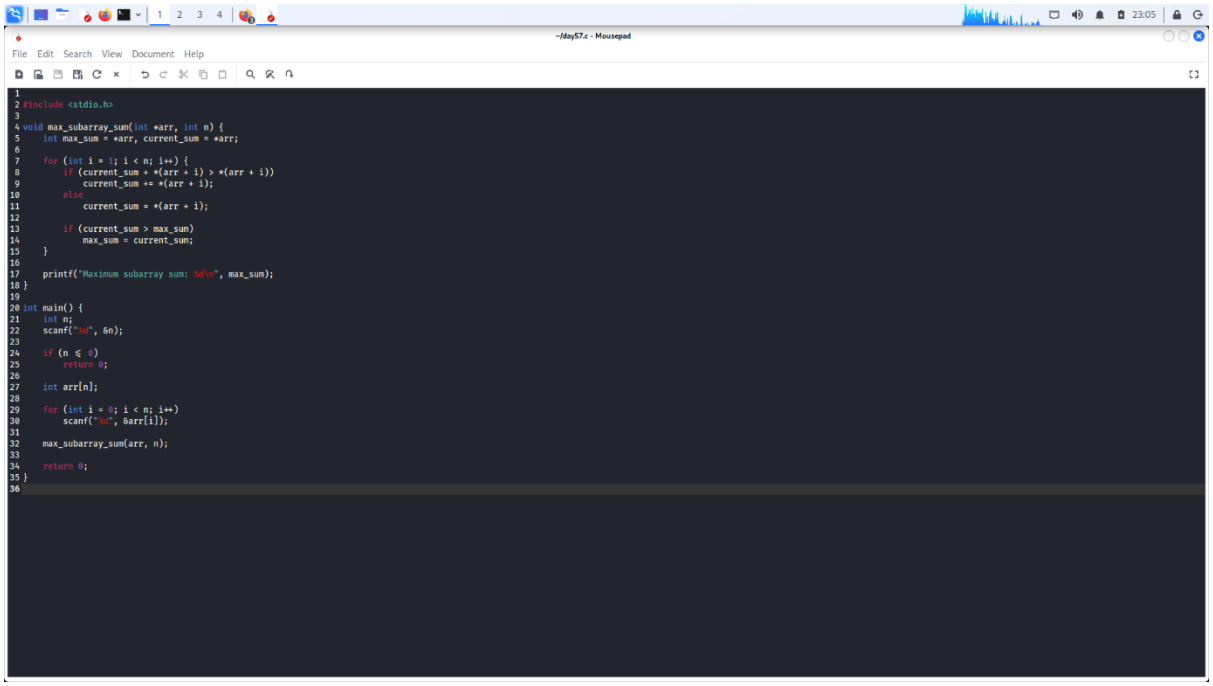

>OUTUT

